

中國 • 南京



地址：江蘇省南京市溧水區白馬工業區鎮塘路1號

郵編：211226

電話：025-56226999 86654476
87193161

傳真：025-87193165

網址：<http://www.mf888.cn>

郵箱：mfyy888@163.com

Address: No1, Suotang Road, Baima Industrial Zone,
Lishui District, Nanjing City, Jiangsu, China

Tel: 0086-25-56226999 86654476

87193161

Fax: 0086-25-87193165

<http://www.mf888.cn>

E-mail: mfyy888@163.com

南京艾利特液壓設備有限公司

Nanjing Elite Hydraulic Pressure Equipment Co., Ltd

C 公司簡介

Company introduction

南京艾利特液壓設備有限公司（南京蒙福液壓機械有限公司）位于中國六朝古都，歷史文化名城—南京，是一家專業研發、制造液壓油泵、油壓電機、液壓油缸等多種液壓元件以及非標液壓系統、電液伺服比例成套控制系統的規模化生產企業，是中國液壓氣動密封件工業協會會員單位。

公司占地面積18000多平方米，現有員工100餘人，其中專業技術工程人員22人，技術力量雄厚，專業性強；公司引進了國外先進技術，先進工藝，為制造高品質的液壓產品提供了強有力的保證。

公司通過了ISO9001：2015質量管理體系認證，擁有南京市工程技術研究中心，擁有外貿進出口經營權，獲得多項國家發明專利和實用新型專利，設計能力、裝備能力以及加工制造能力在國內同行業處於領先水平。

公司產品廣泛應用於各類機床設備，冶金工業，工程機械，建築機械、交通船舶、塑機等行業。公司產品以其優越的性能，優良的品質和周到的服務暢銷全國，遠銷東南亞等國際市場。

公司秉承“質量第一，信譽至上”的宗旨，竭力為新老客戶提供最優質的產品和最貼心的服務，我們願與各界朋友在液壓領域中攜手并進，共創輝煌！

Nanjing Elite Hydraulic Pressure Equipment Co., Ltd (Nanjing Blessed Hydraulic Machinery Co., Ltd) is located in Nanjing, which is the ancient capital of the six dynasties of China and Historical and cultural city. We are a professional manufacturing enterprise for R&D, manufacturing of hydraulic oil pumps, non-standard hydraulic system, sets of electro-hydraulic service control system, hydraulic cylinder, hydraulic power units, and a variety of hydraulic components etc. Our company is a member of China Hydraulic Pneumatic Seals Industry Association.

Our company covers an area of more than 18,000 square meters with more than 100 employees, including 22 people of professional and technical staff. It introduced advanced foreign technology for a strong guarantee for the manufacture of high quality hydraulic products.

Our Company has the right to import and export business and has already passed through ISO9001:2015 Quality Management System Certificate with many national invention patents and Utility model patents. Our company owns Nanjing technology research center. The design and equipment capabilities and manufacturing capabilities is up to the leading level in the same industry.

Our products are widely used in various types of machine tools and metallurgical industry and engineering machinery and construction machinery and transport vessels and presses etc. The company's products with superior performance, excellent quality and thoughtful service at the same time, selling the whole domestic markets, exported to Southeast Asia and other international markets.

Our company sticks to "Quality first, Credit first" for providing to our customers with high quality products and the most attentive service. Let us hand in hand and cooperate together for brilliant future in the hydraulic fields.



C 目錄

atalog

可變容量葉片油泵
VARIABLE DISPLACEMENT VANE PUMPS ----- P 03-13

雙連式可變容量葉片油泵
VARI- DISPLACEMENT TWIN VANE PUMPS ----- P 14-16

中壓可變容量葉片油泵
VARABLEI DISPLACEMENT VANE PUMPS ----- P 17-18

可變容量葉片油泵+齒輪油泵
VARI-DISP.VANE PUMPS & GEAR PUMPS ----- P 19

固定容量葉片油泵
FIXED DISPLACEMENT VANE PUMPS ----- P 20-22

雙連式固定容量葉片油泵
IXED DISPLACEMENT TWIN VANE PUMPS ----- P 23-24

固定容量葉片油泵+齒輪油泵
FIXED DISP.VANE PUMPS-GEAR PUMPS ----- P 25-27

高低壓固定容量葉片油泵
FIXED DISP.VANE PUMPS(HI-LO SYSTEM) ----- P 28-29

高壓固定容量葉片油泵
HI-PRES.FIXED DISP. SINGLE VANE PUMPS ----- P 30-32

高壓固定容量雙聯葉片油泵
HI-PRES.FIXED DISP.DOUBLE VANE PUMPS ----- P 33-34

油壓專用電機 ----- P 35-37

臥式油壓專用電機 HSW ----- P 38

立式油壓專用電機 HSL ----- P 38

臥式出綫盒在上型油壓電機及常用電壓電機配綫圖 ----- P 39

經營理念及營銷網絡 ----- P 40



特點:

本系列油泵，操作時噪音小，運轉滑順，耐摩耗，適于工作母機及專用機使用。


溫升小，馬力損失小，內藏式自動壓力補償設計。

FEATURES:

This series pump which being with low noise level, running smoothly and wear resistant. Especially, those are very suitable for machine tool & special purpose m/c use.

Little temp upward & little power lose and designed of auto emersed pressure compensating.





訂購索引/ORDERING INDEX:

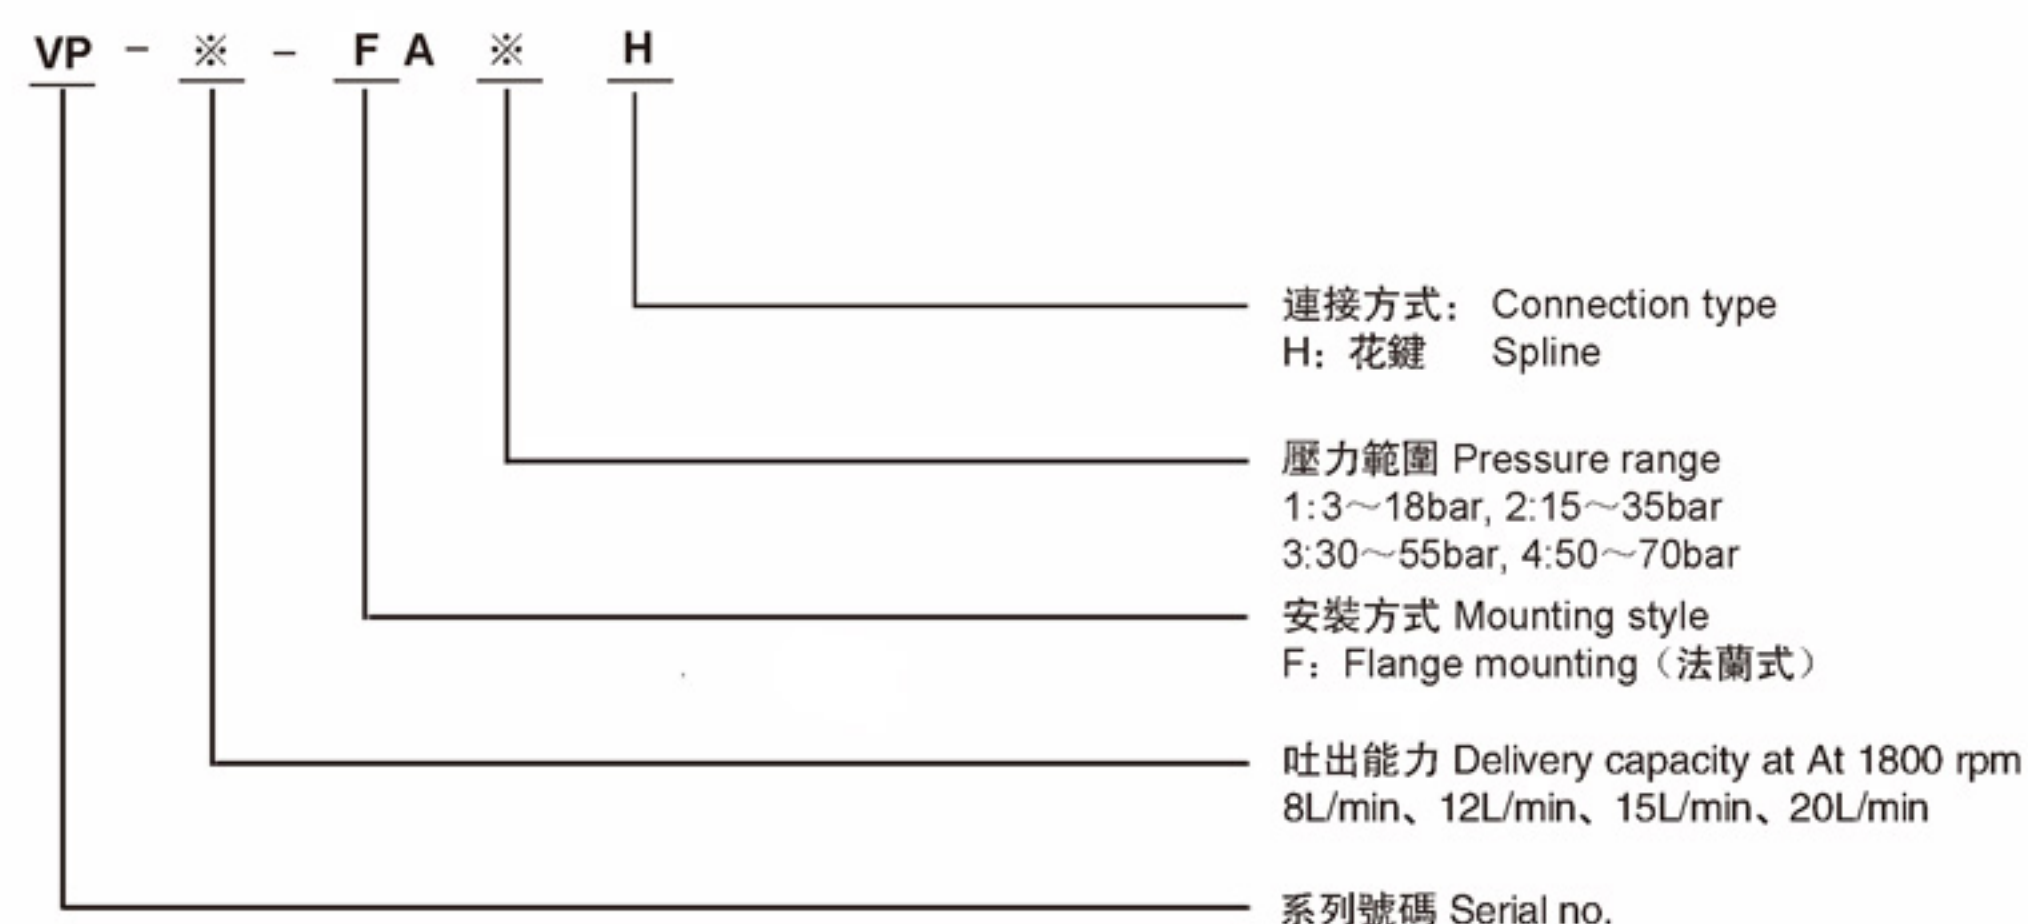

規格/SPECIFICATIONS:

型式 Model	吐出能力 Delivery capacity(1800rpm)	壓力調整範圍 Pressure adj. range	額定速度 Rated speed	
			最高 Max.	最低 Min.
VP-08	8 L/min	3 ~ 70bar	1800 rpm	800 rpm
VP-12	12 L/min	3 ~ 70bar		
VP-15	15 L/min	3 ~ 70bar		
VP-20	20 L/min	3 ~ 70bar		

尺寸圖/DIMENSIONS: VP-08、12、15、20

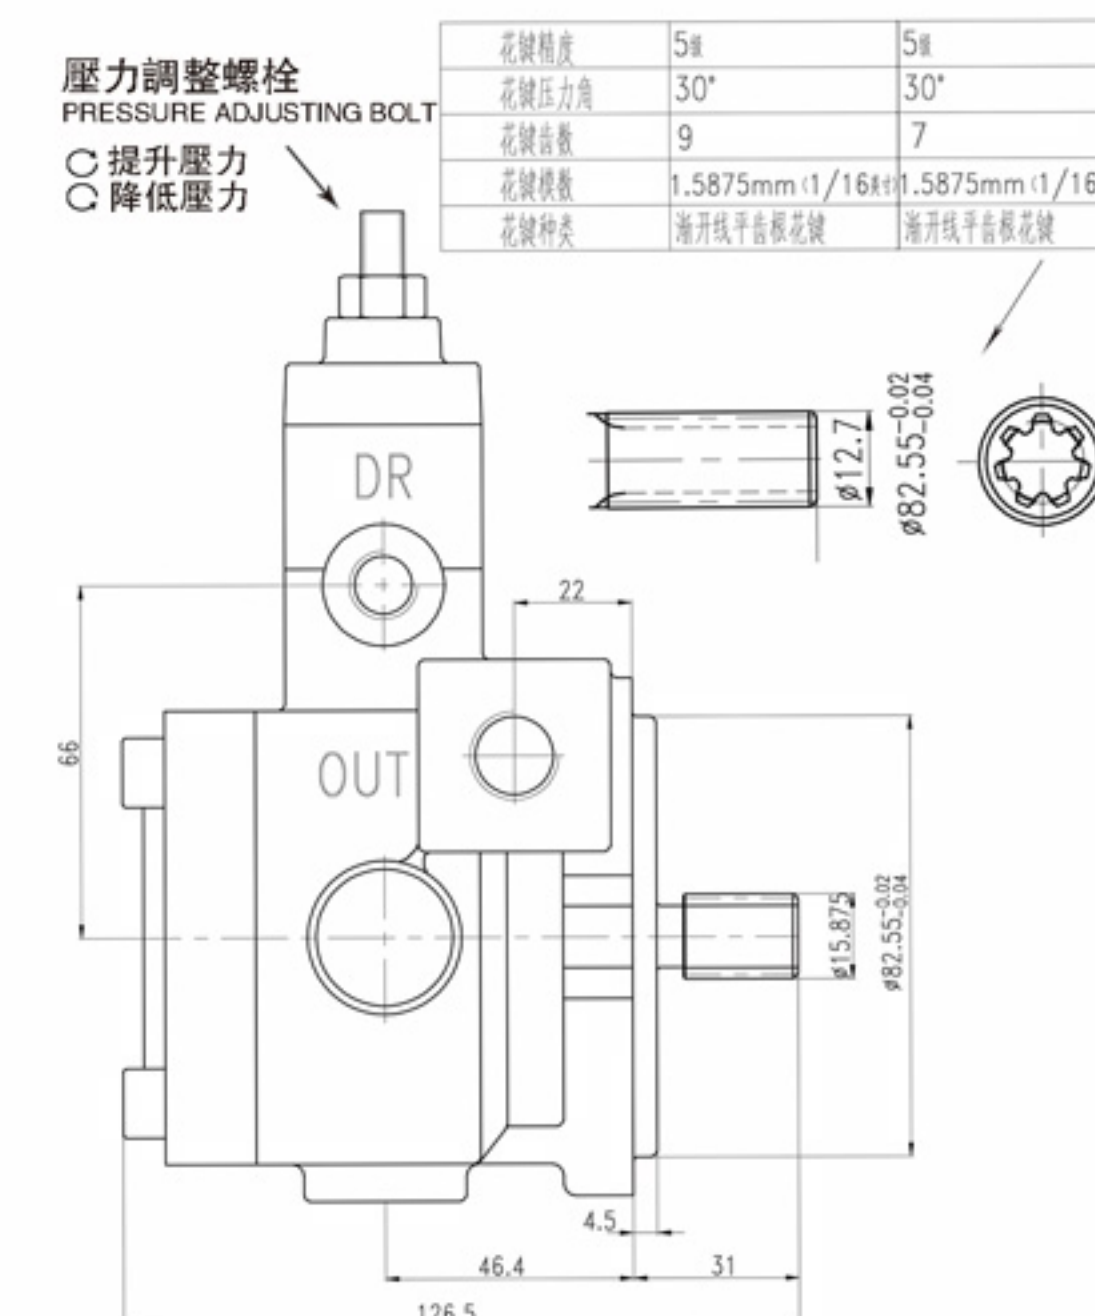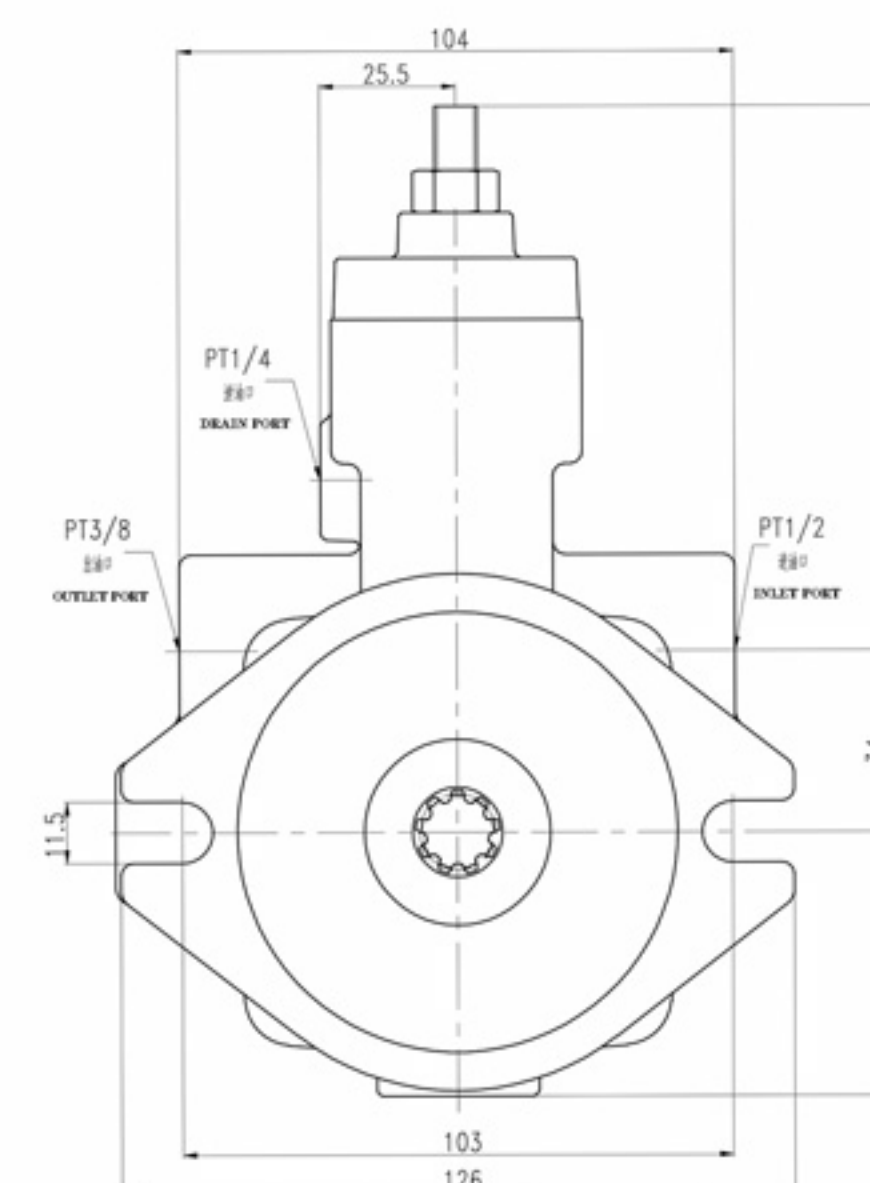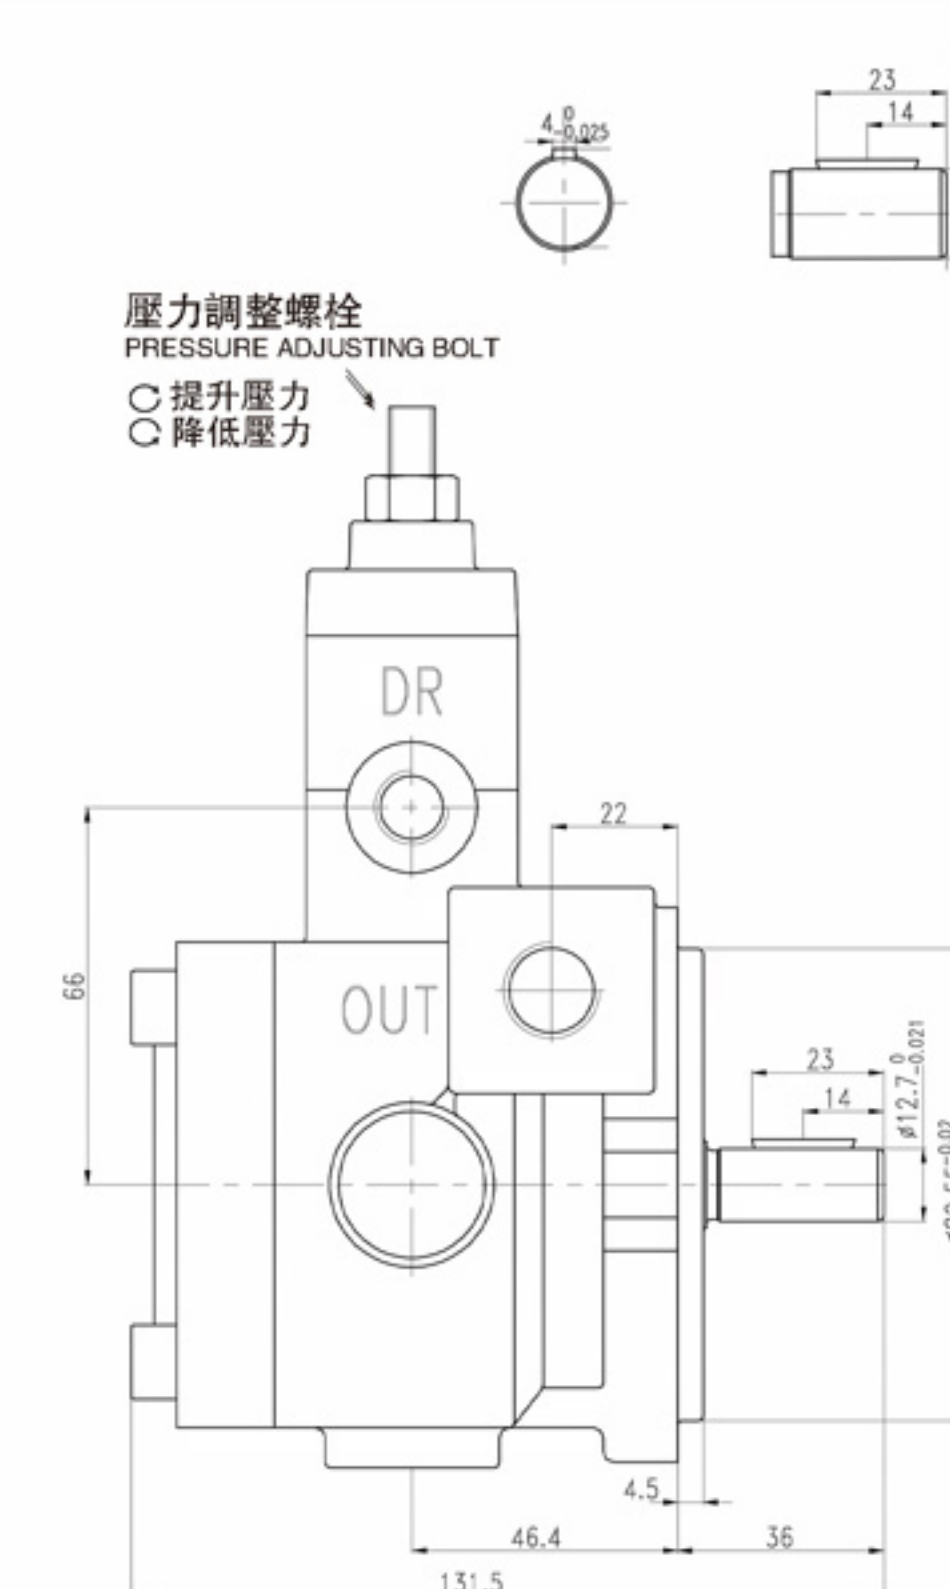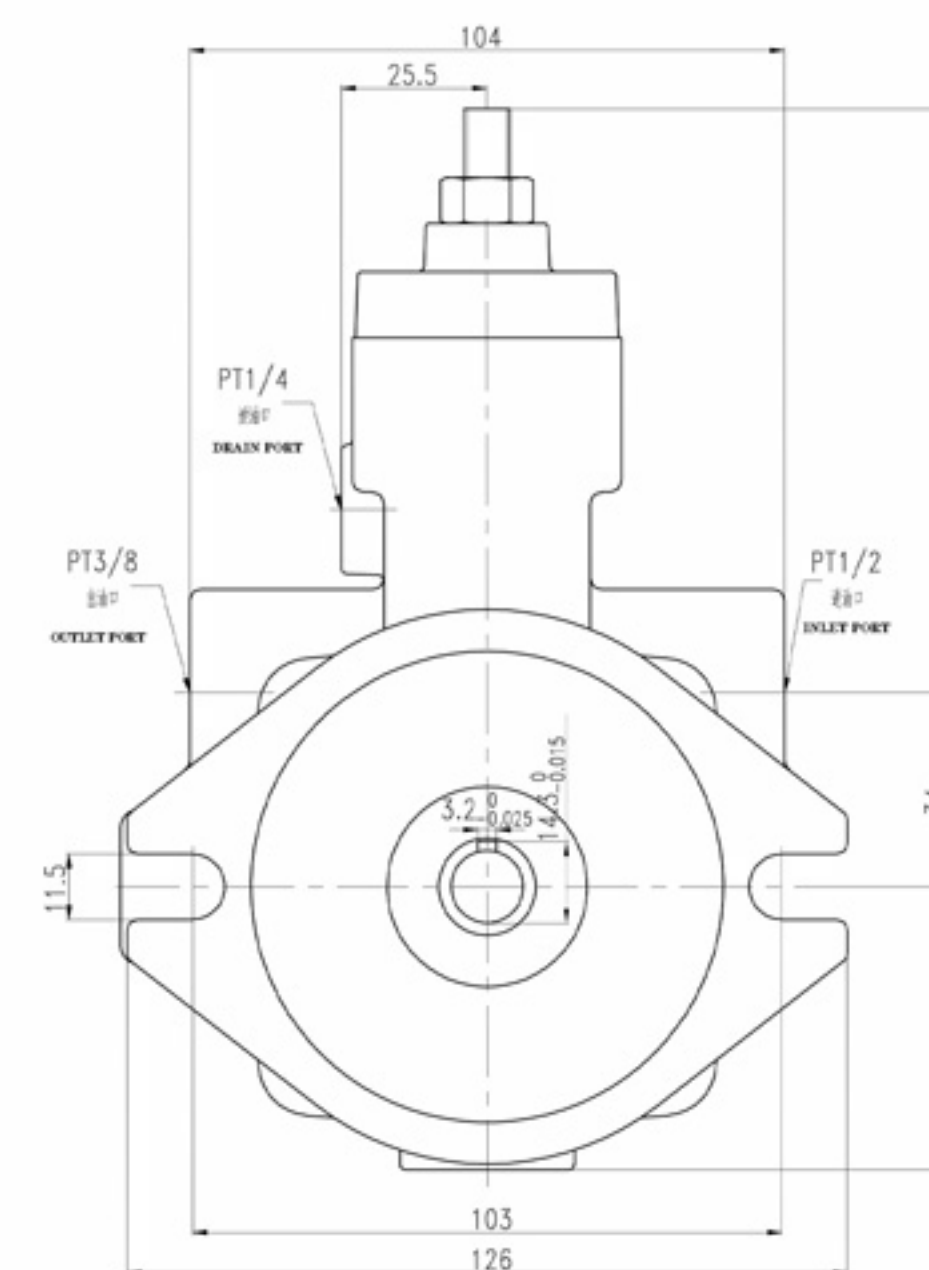



特點:

本系列泵浦，操作時噪音小，運轉滑順，耐摩耗，適于工作母機及專用機使用。


溫升小，馬力損失小，內藏式自動壓力補償設計。

FEATURES:

This series pump which being with low noise level, running smoothly and wear resistant. Especially, those are very suitable for machine tool & special purpose m/c use.

Little temp upward & little power lose and designed of auto emersed pressure compensating.



訂購索引/ORDERING INDEX:

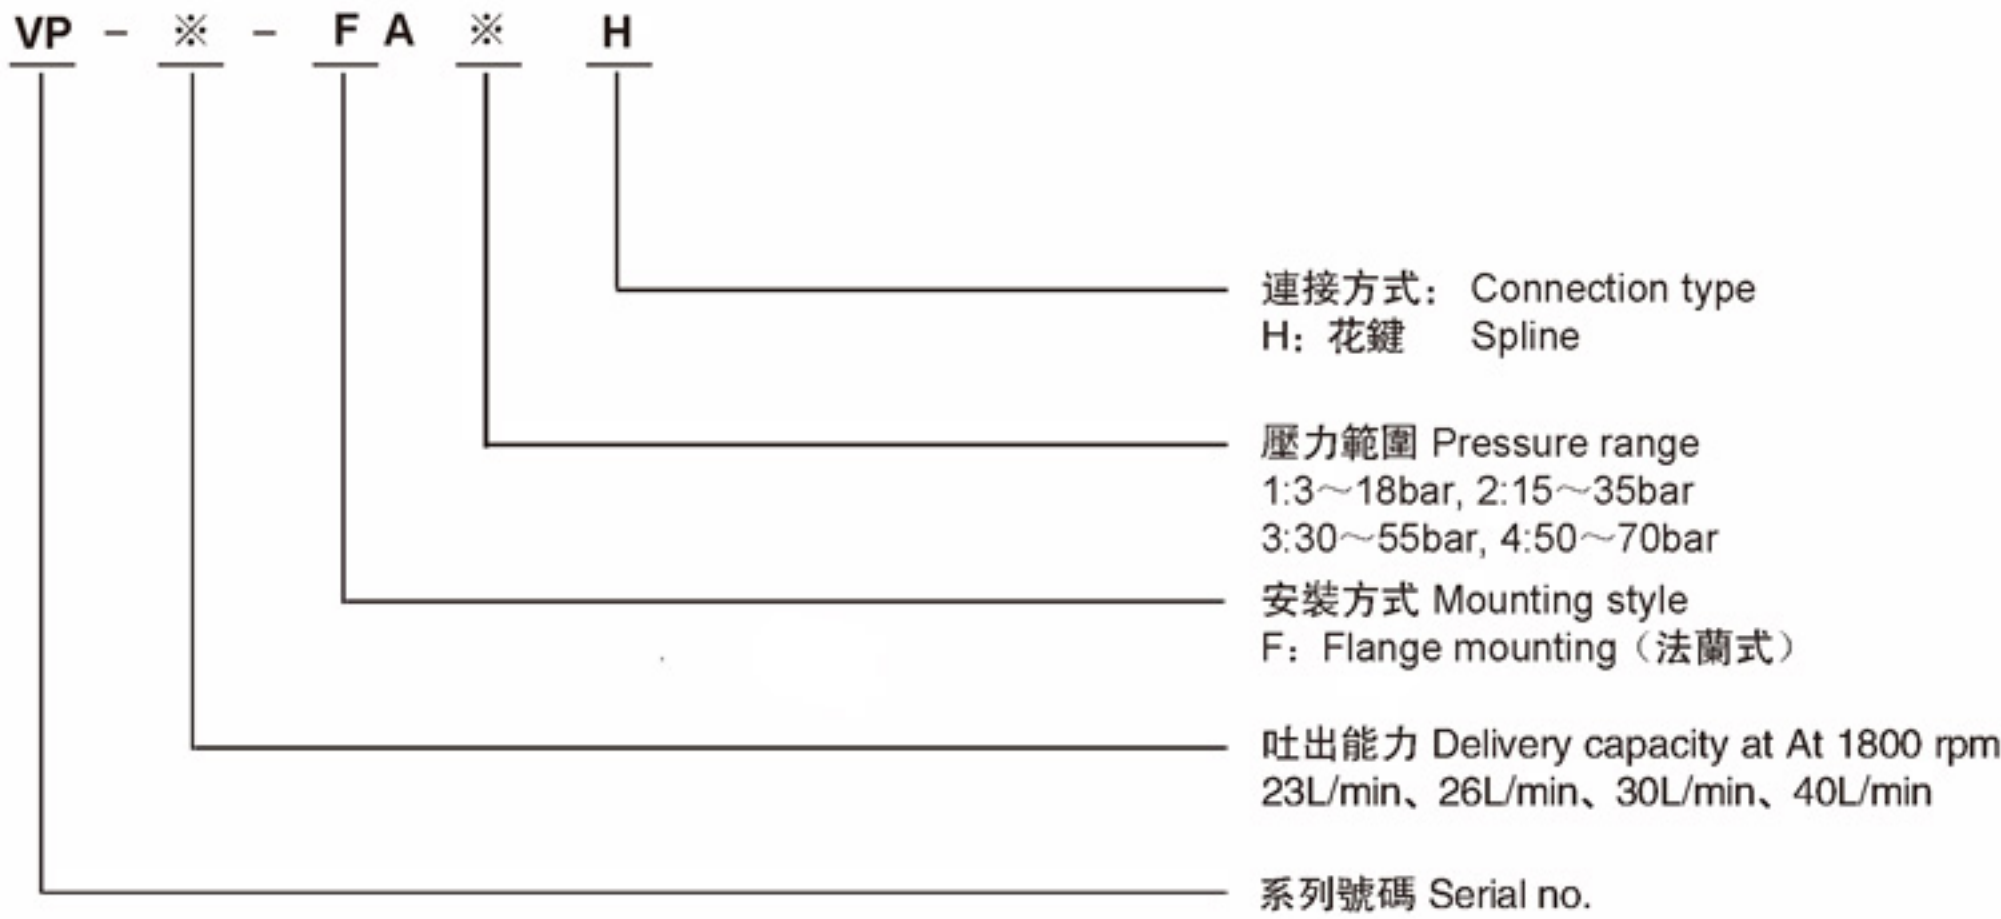


規格/SPECIFICATIONS:

型式 Model	吐出能力 Delivery capacity(1800rpm)	壓力調整範圍 Pressure adj. range	額定速度 Rated speed	
			最高 Max.	最低 Min.
VP-23	23 L/min	3 ~ 70bar	1800 rpm	800 rpm
VP-26	26 L/min	3 ~ 70bar		
VP-30	30 L/min	3 ~ 70bar		
VP-40	40 L/min	3 ~ 70bar		


尺寸圖/DIMENSIONS: VP-23、26、30、40

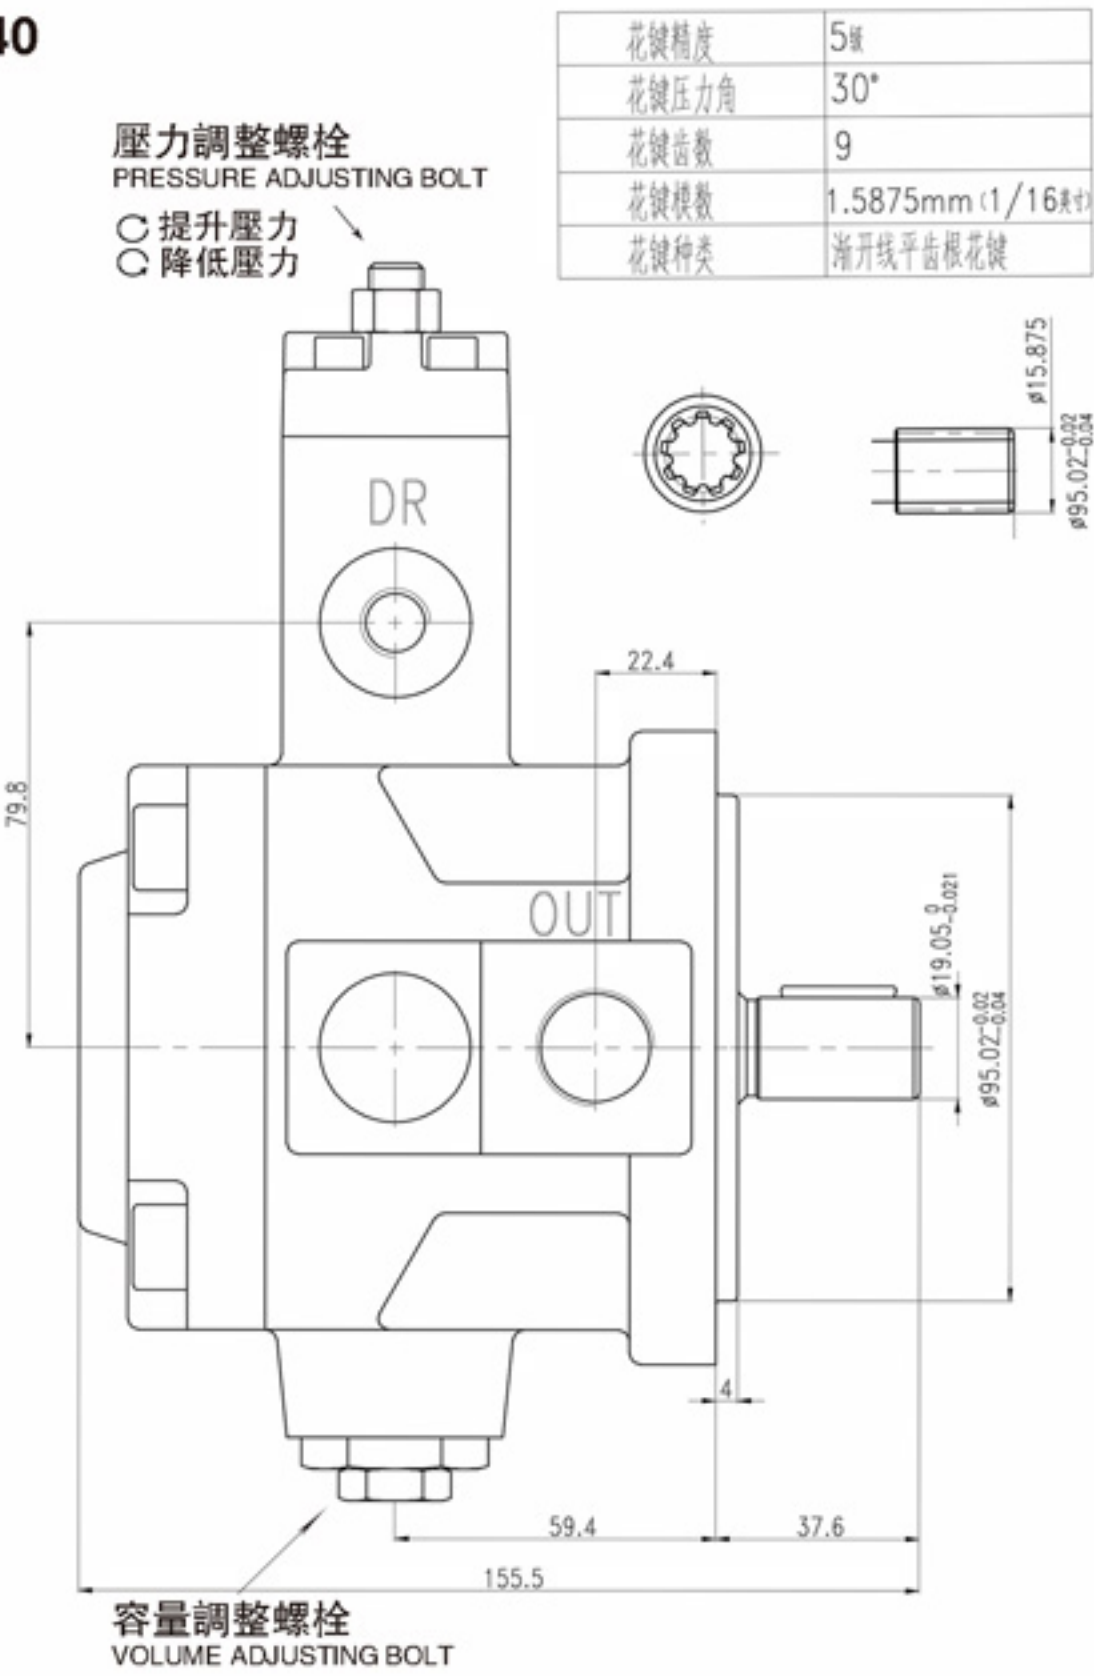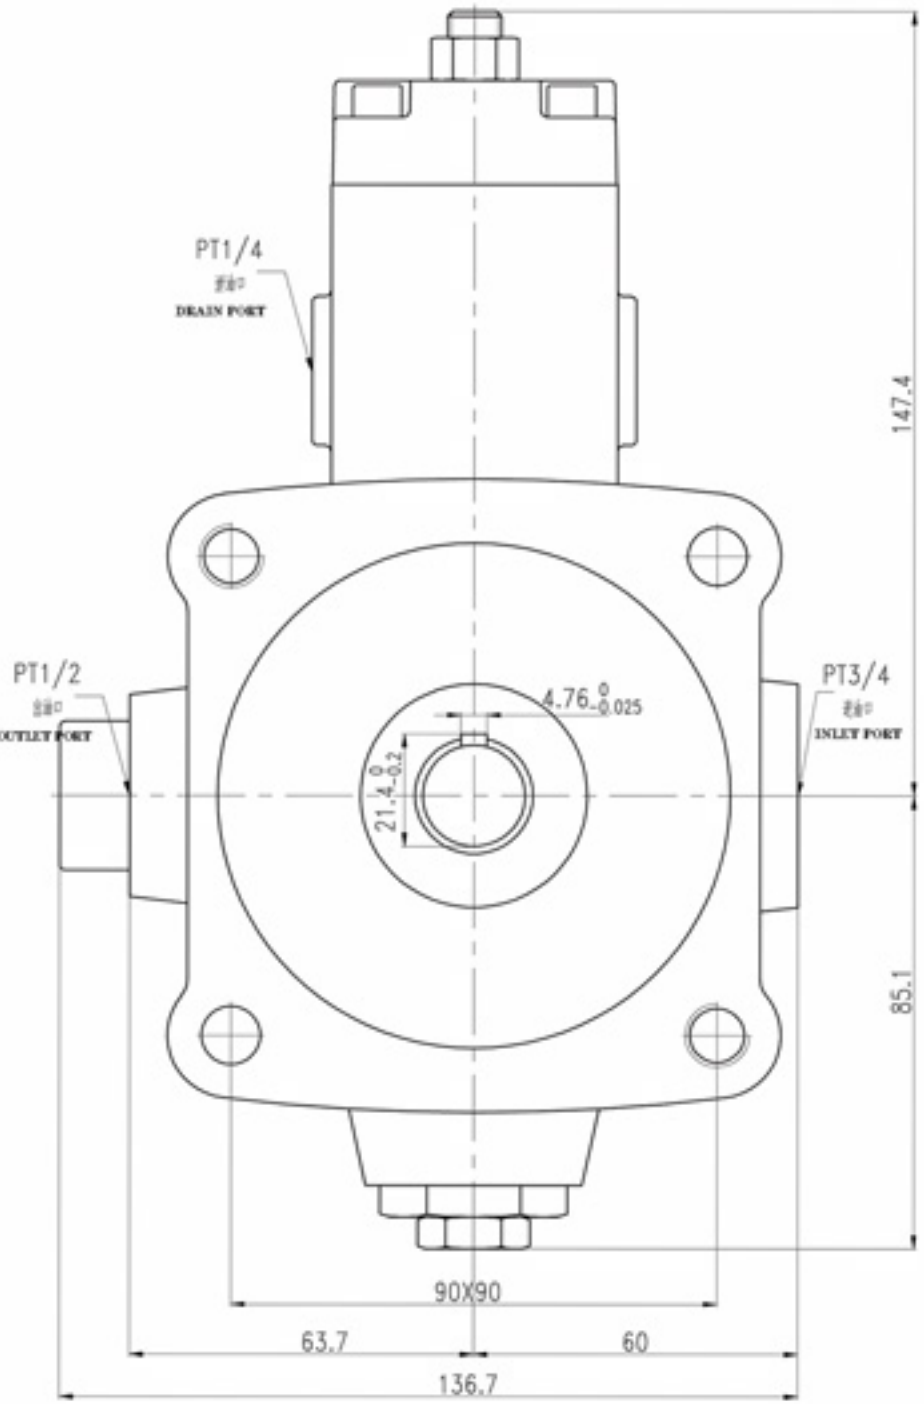

VP-30

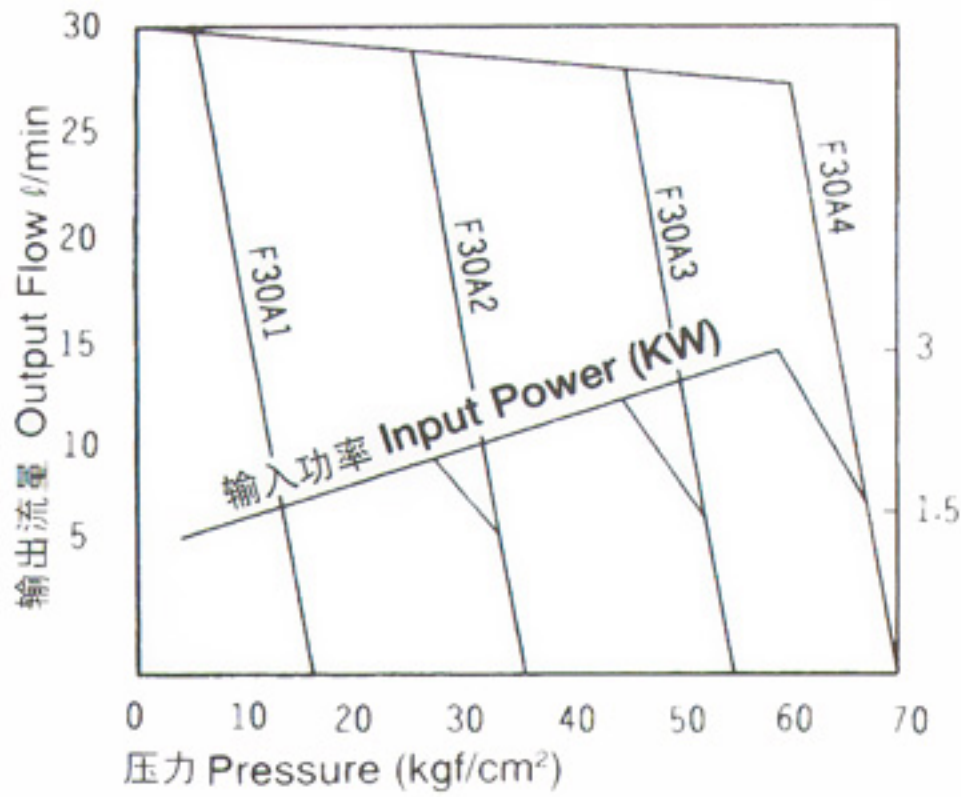

VP-40

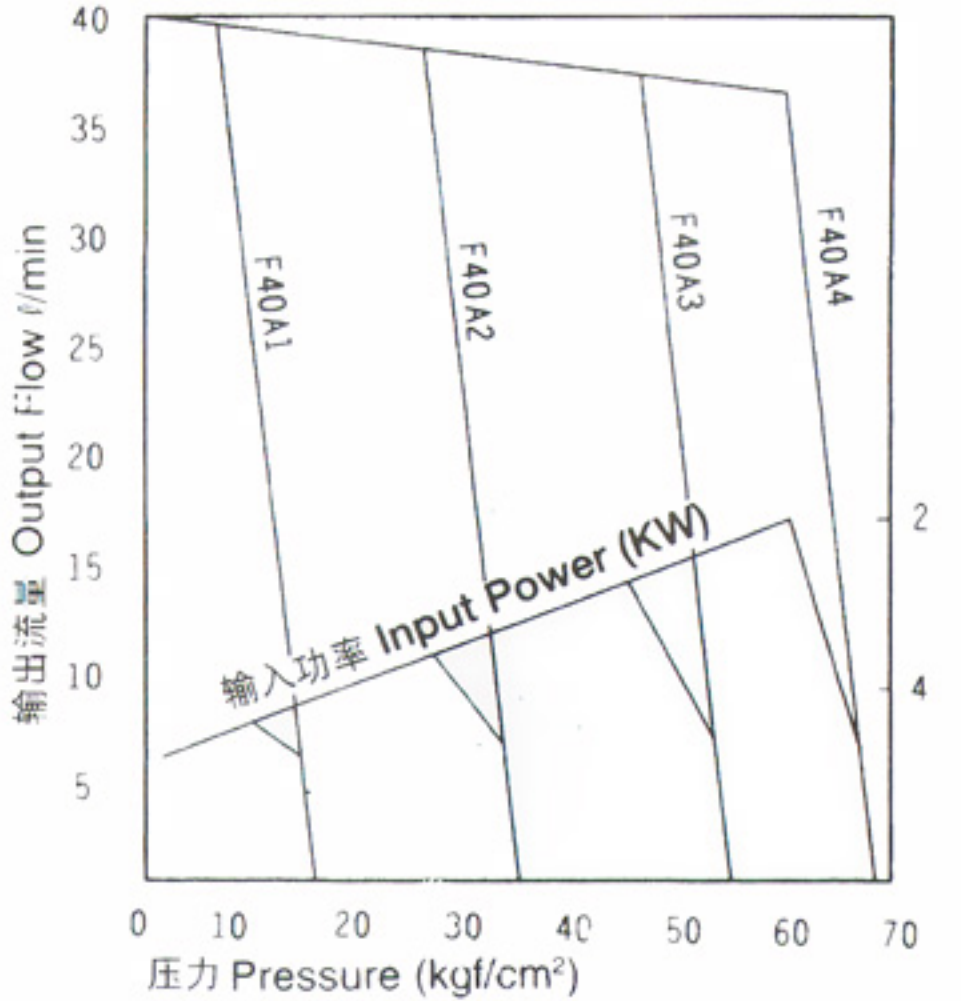



特點:

本系列油泵，外觀新穎，操作時嘈音小，運轉滑順，耐摩耗，適于工作母機及專用機使用。


溫升小，馬力損失小，內藏式自動壓力補償設計。

FEATURES:

This series pump which being with novel appearance low noise level, running smoothly and wear resistant. Especially, those are very suitable for machine tool & special purpose m/c use.

Little temp upward & little power lose and designed of auto emersed pressure compensating.



訂購索引/ORDERING INDEX:

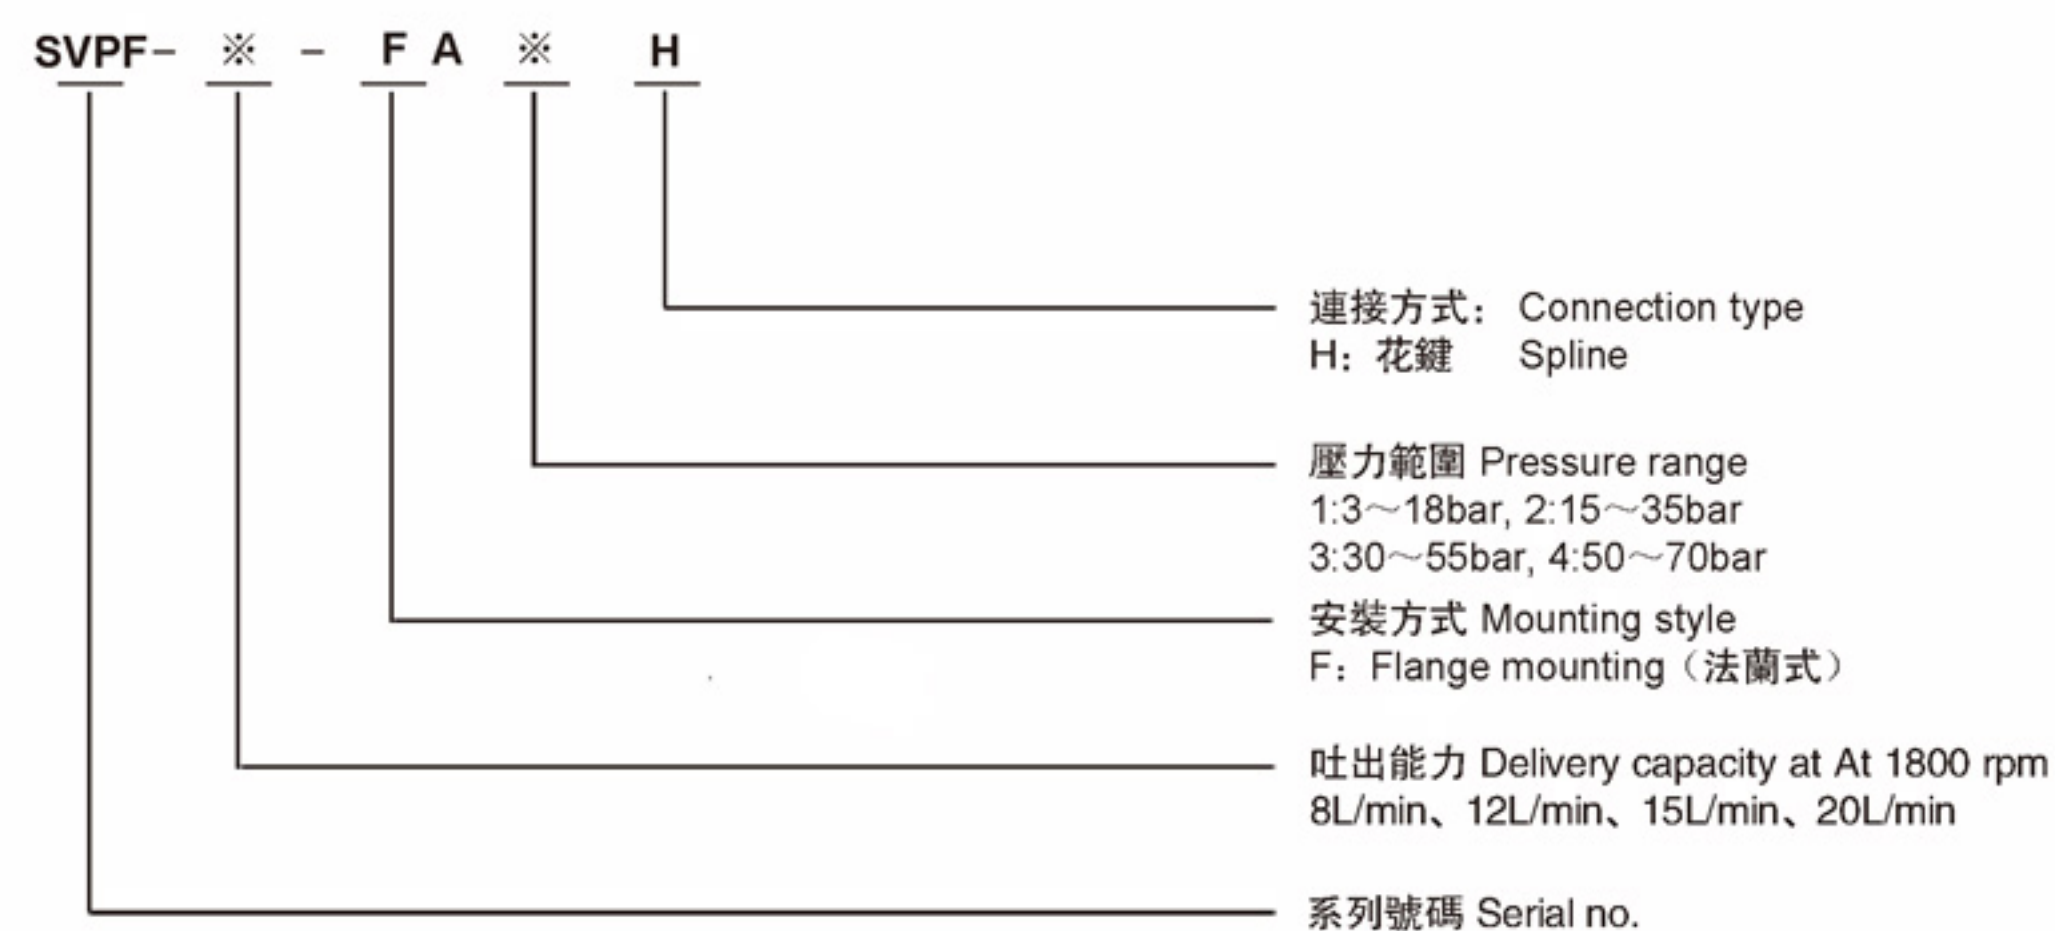



規格/SPECIFICATIONS:


型式 Model	吐出能力 Delivery capacity(1800rpm)	壓力調整範圍 Pressure adj. range	額定速度 Rated speed	
			最高 Max.	最低 Min.
SVPF-8	8 L/min	3 ~ 70bar	1800 rpm	800 rpm
SVPF-12	12 L/min	3 ~ 70bar		
SVPF-15	15 L/min	3 ~ 70bar		
SVPF-20	20 L/min	3 ~ 70bar		

尺寸圖/DIMENSIONS: SVPF-08、12、15、20

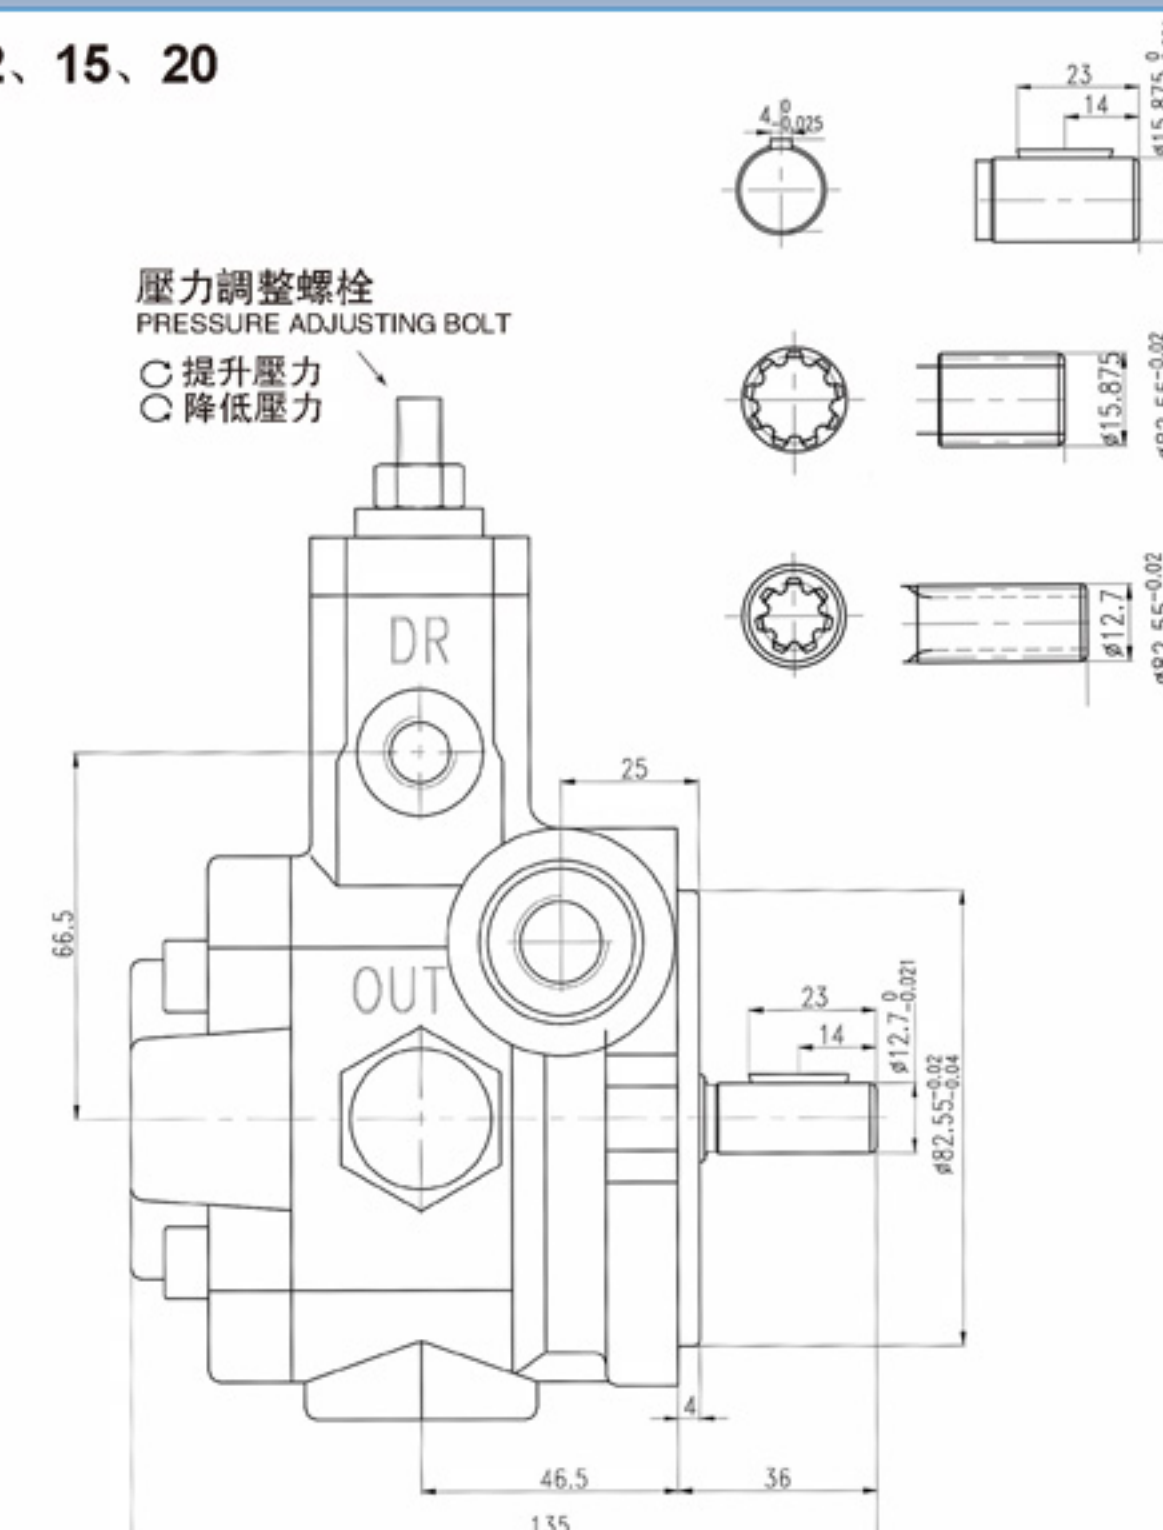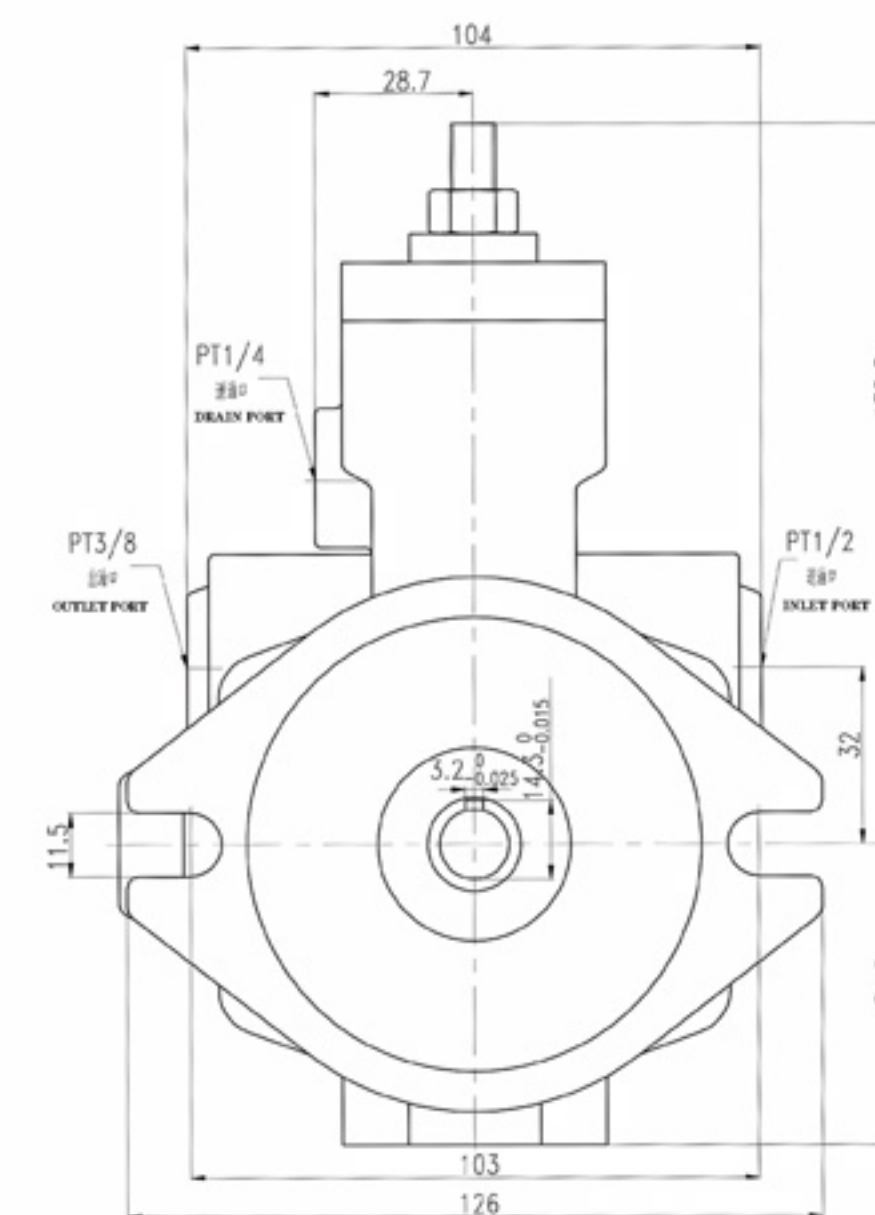

SVPF-23、26、30、40

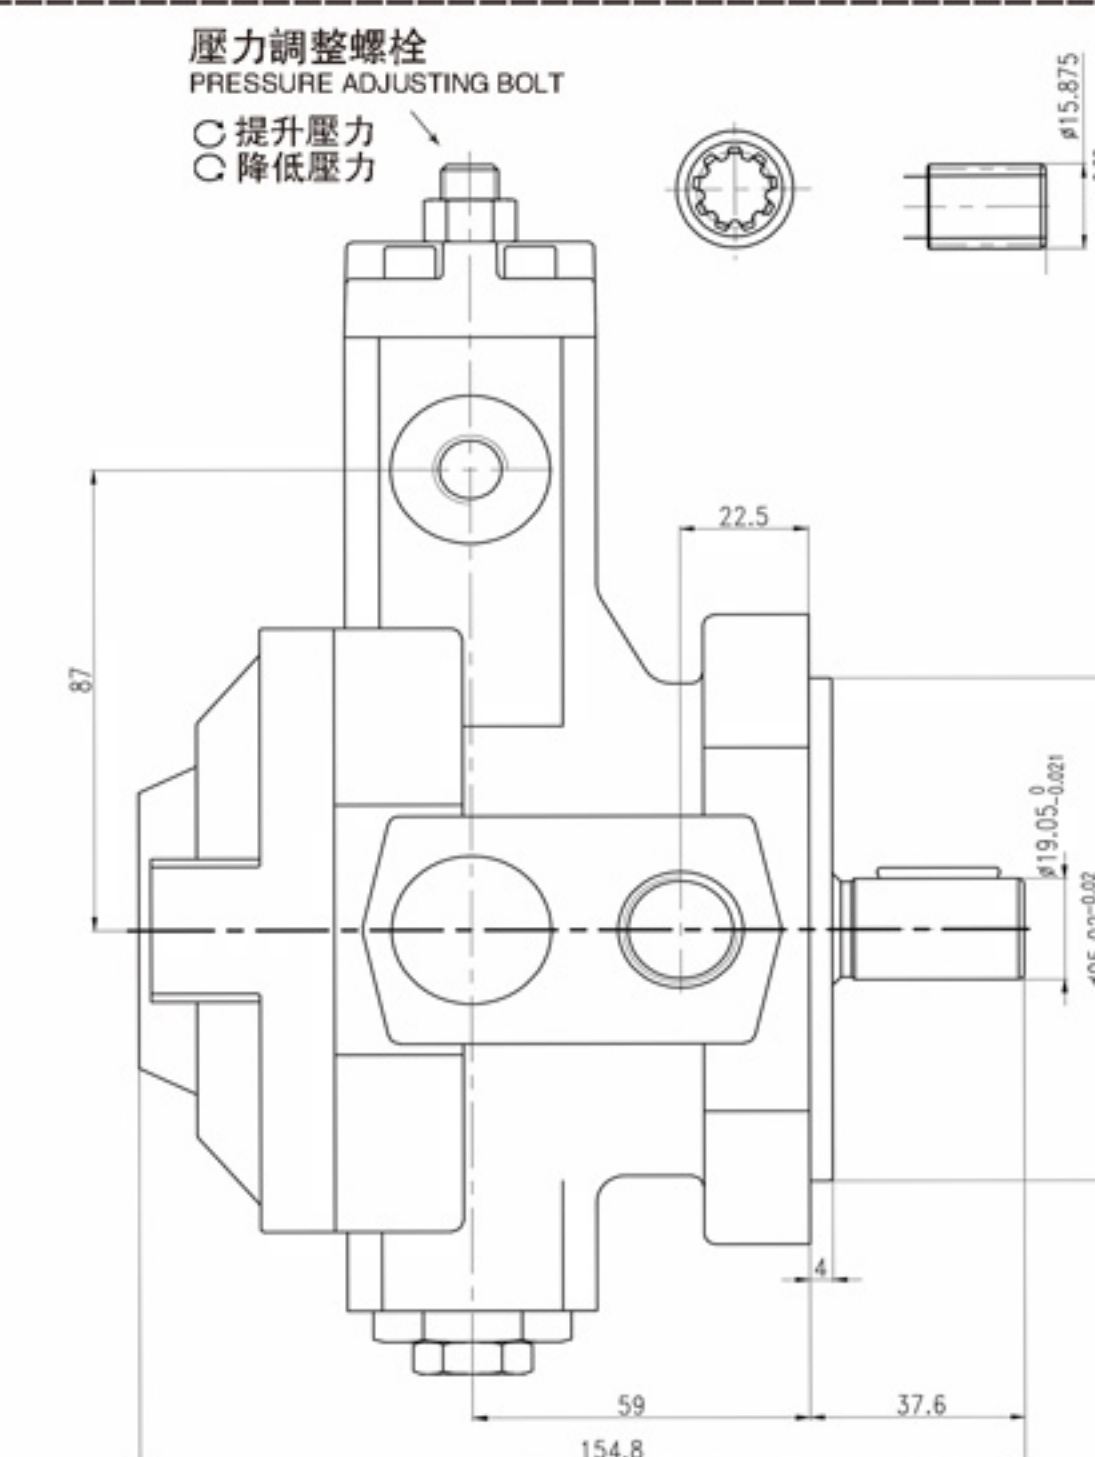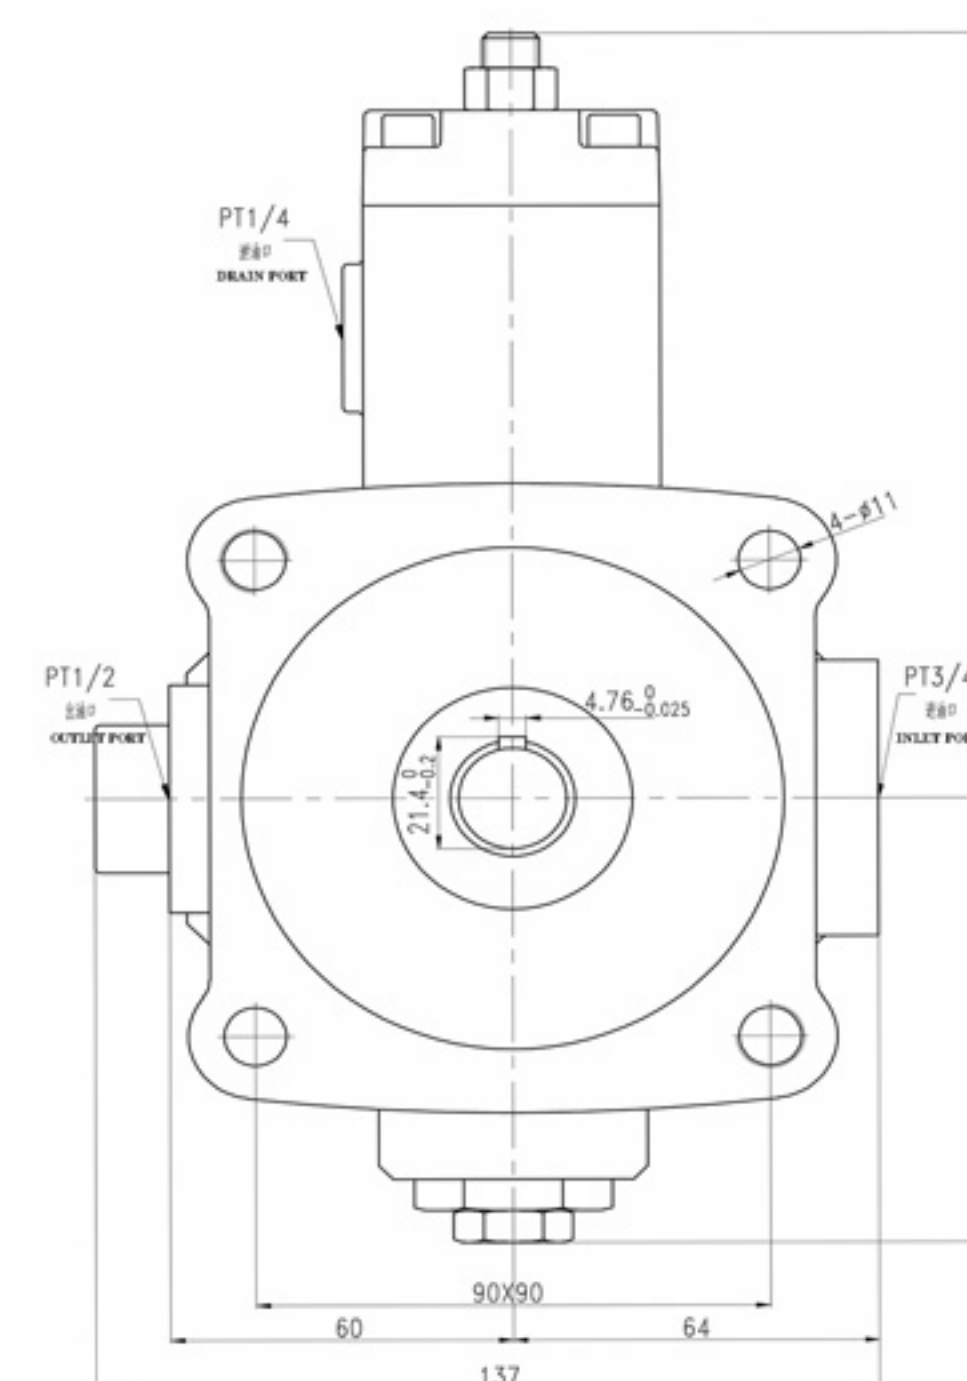


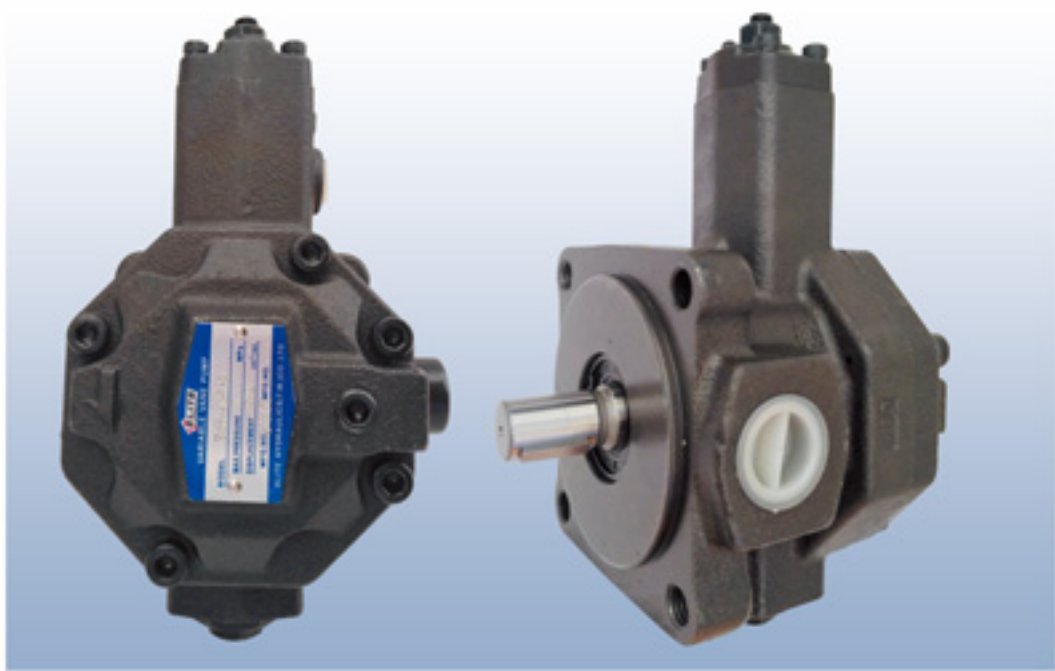

特點:
本系列泵浦，外觀新穎，操作時嘈音小，運轉滑順，耐摩耗，適于工作母機及專用機使用。
溫升小，馬力損失小，內藏式自動壓力補償設計。

FEATURES:
This series pump which being with novel appearance low noise level, running smoothly and wear resistant. Especially, those are very suitable for machine tool & special purpose m/c use.
Little temp upward & little power lose and designed of auto emersed pressure compensating.

訂購索引/ORDERING INDEX:

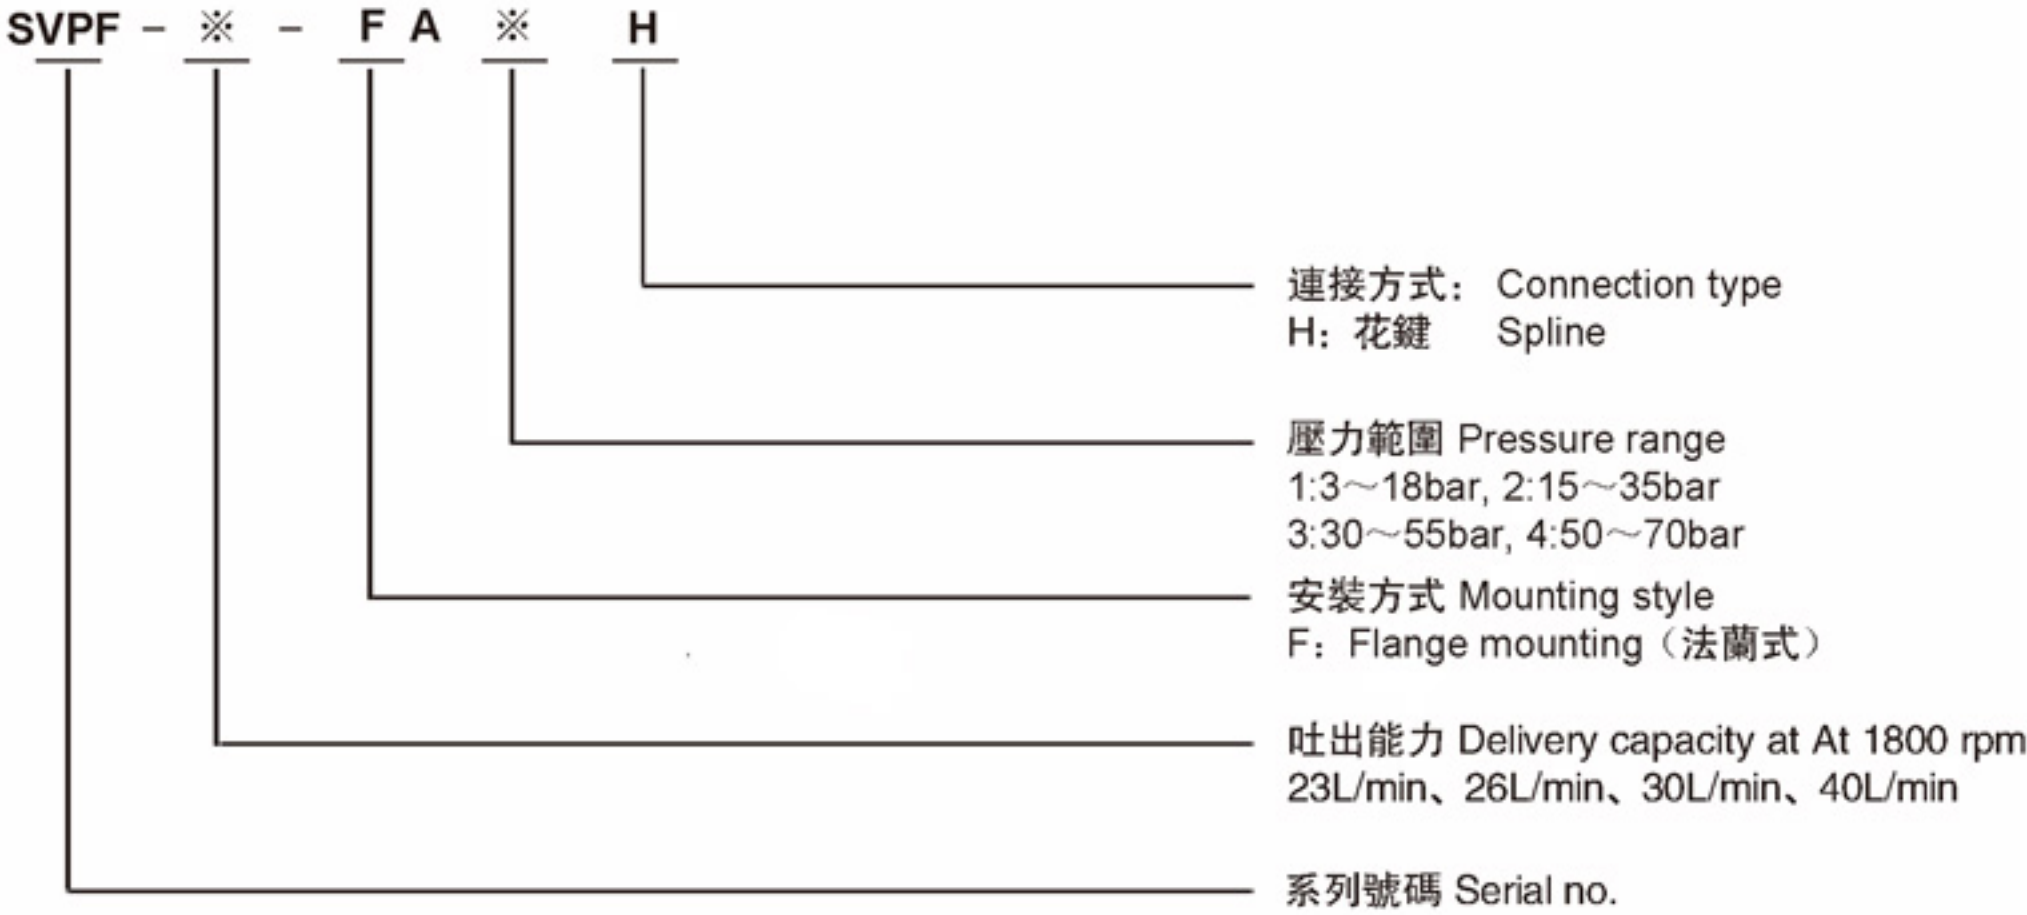

規格/SPECIFICATIONS:


型式 Model	吐出能力 Delivery capacity(1800rpm)	壓力調整範圍 Pressure adj. range	額定速度 Rated speed	
			最高 Max.	最低 Min.
SVPF-23	23 L/min	3 ~ 70bar	1800 rpm	800 rpm
SVPF-26	26 L/min	3 ~ 70bar		
SVPF-30	30 L/min	3 ~ 70bar		
SVPF-40	40 L/min	3 ~ 70bar		



特點:
本系列油泵，操作時嘈音小，運轉滑順，耐摩耗，適于工作母機及專用機使用。
內藏式自動壓力補償設計，性能優越，溫升低，更節能。

FEATURES:
This series pump which being with low noise level, running smoothly and wear resistant, Especially, those are very suitable for machine tool & special purpose m/c use.
Designed of emersed pressure compensating, excellent performance, small temperature rise, much more energy saving.


訂購索引/ORDERING INDEX:

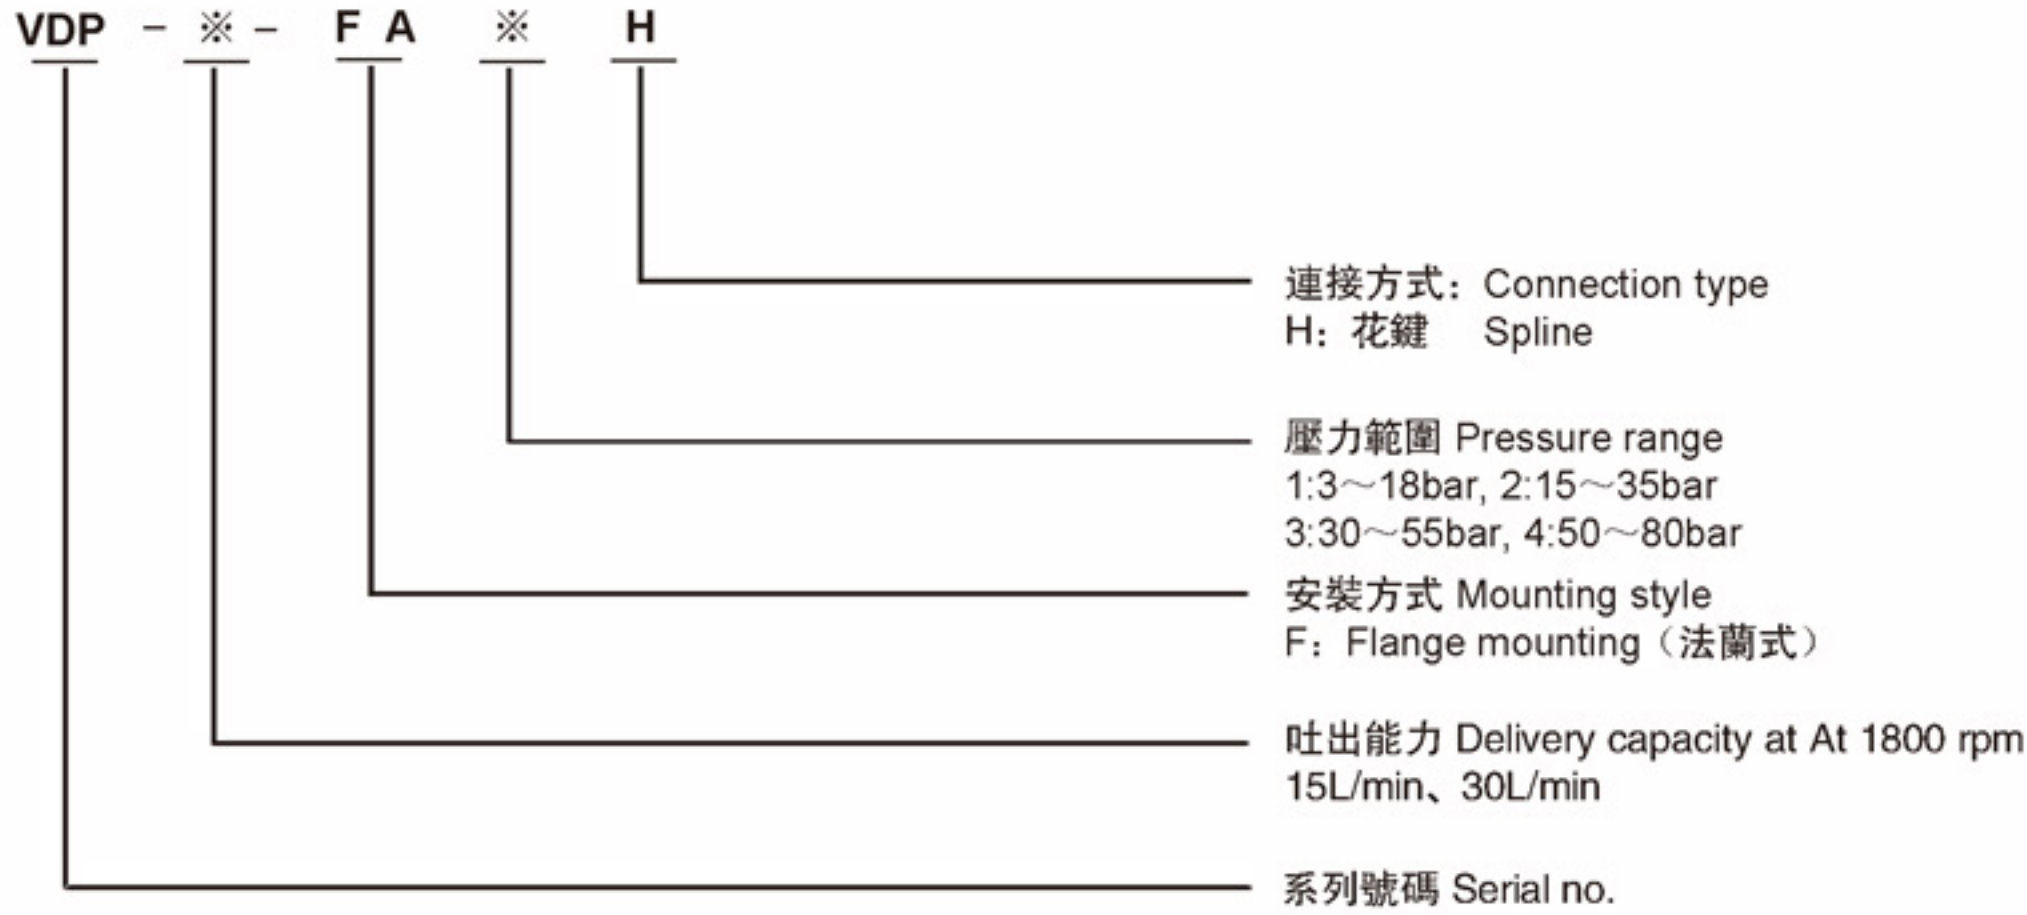



規格/SPECIFICATIONS:

型式 Model	吐出能力 Delivery capacity(1800rpm)	壓力調整範圍 Pressure adj. range	額定速度 Rated speed	
			最高 Max.	最低 Min.
VDP-15	15 L/min	3 ~ 80bar	1800 rpm	800 rpm
VDP-30	30 L/min	3 ~ 80bar		



尺寸圖/DIMENSIONS: VDP-15、30

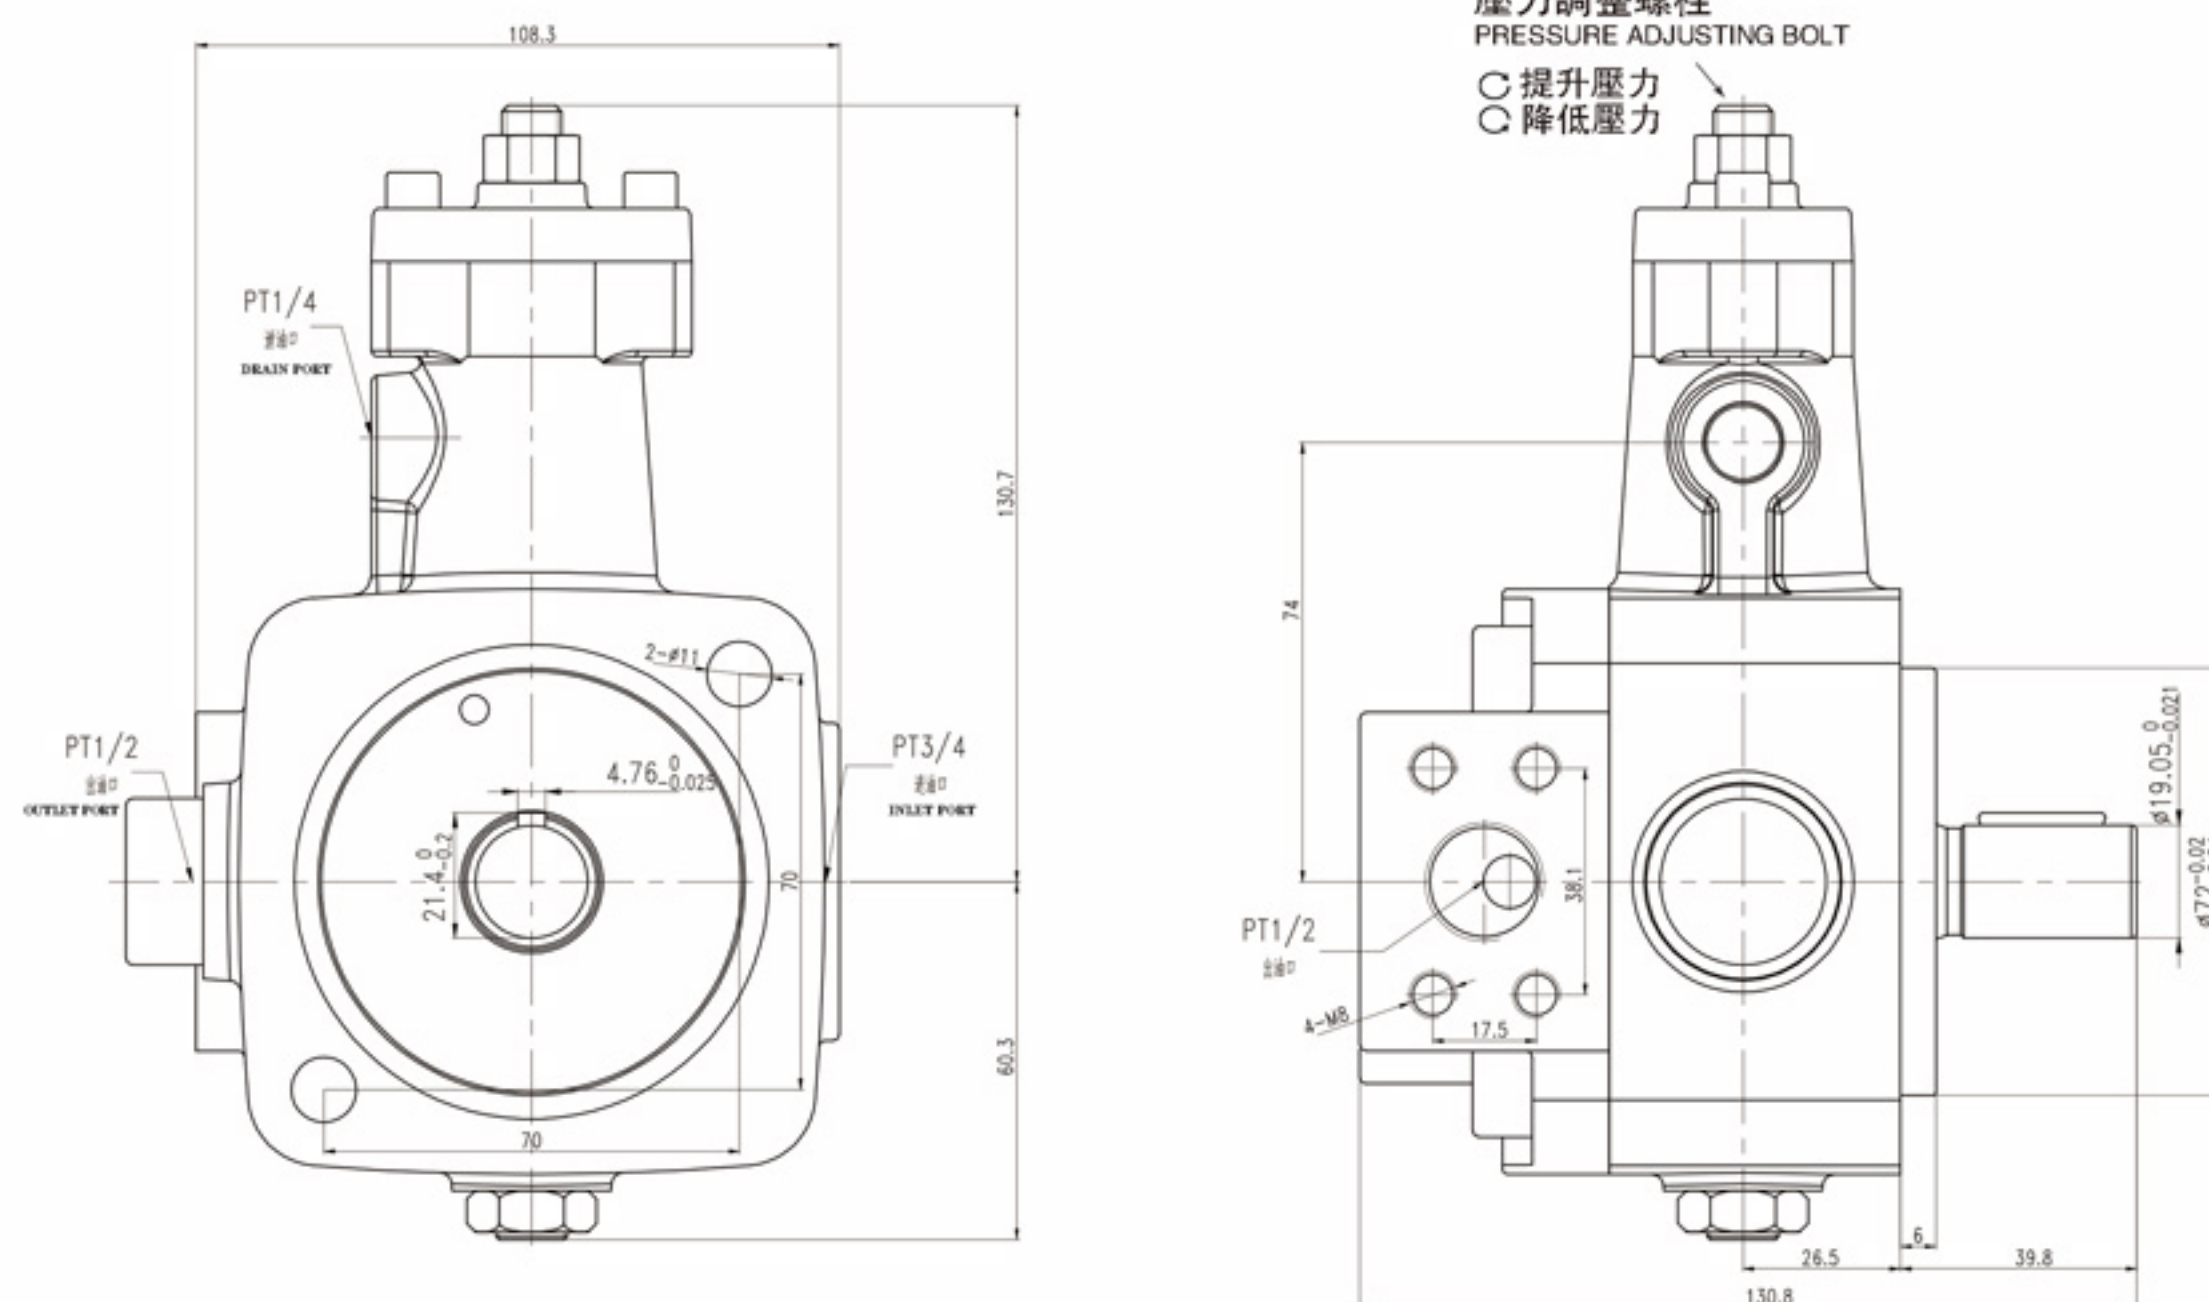


2HP-4P

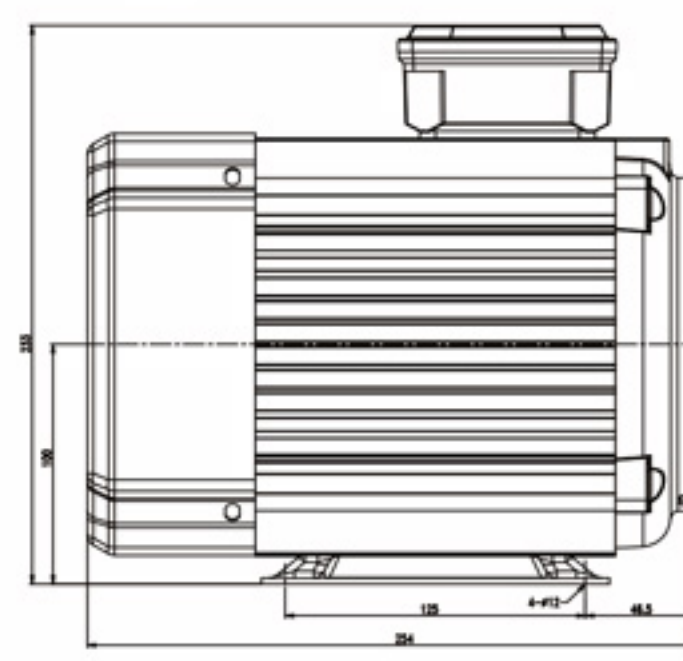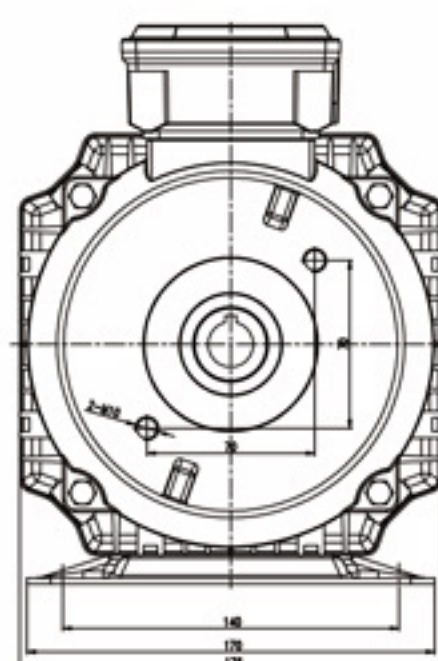

2HP+VDP

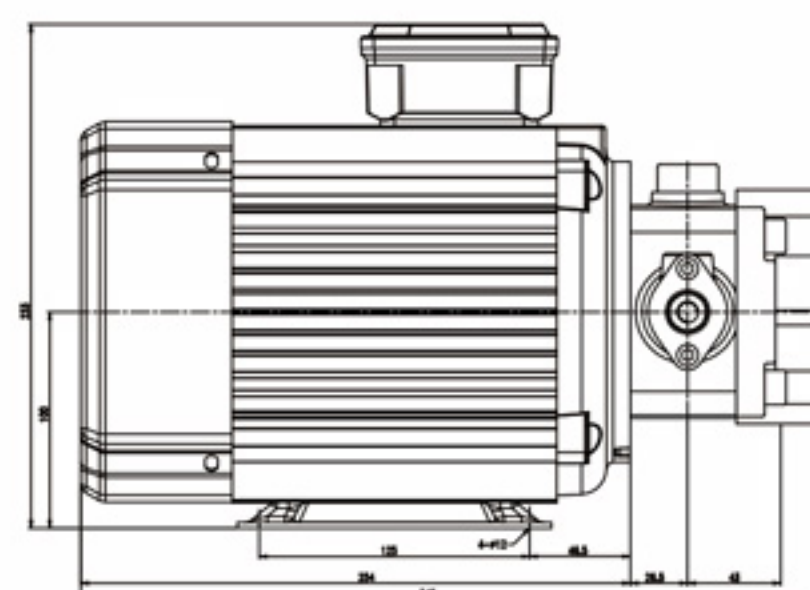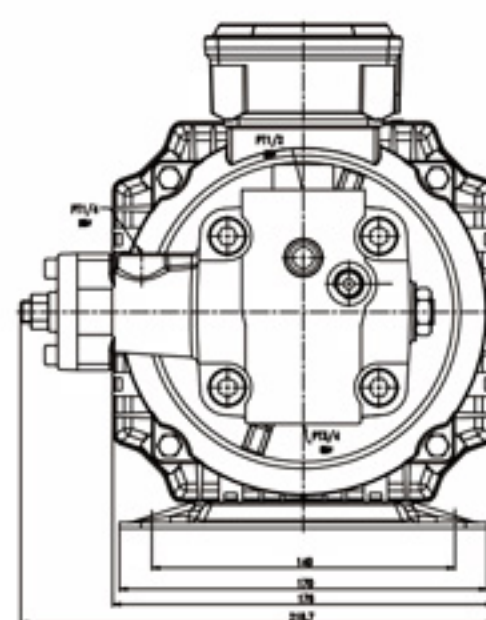

訂購索引/ORDERING INDEX:

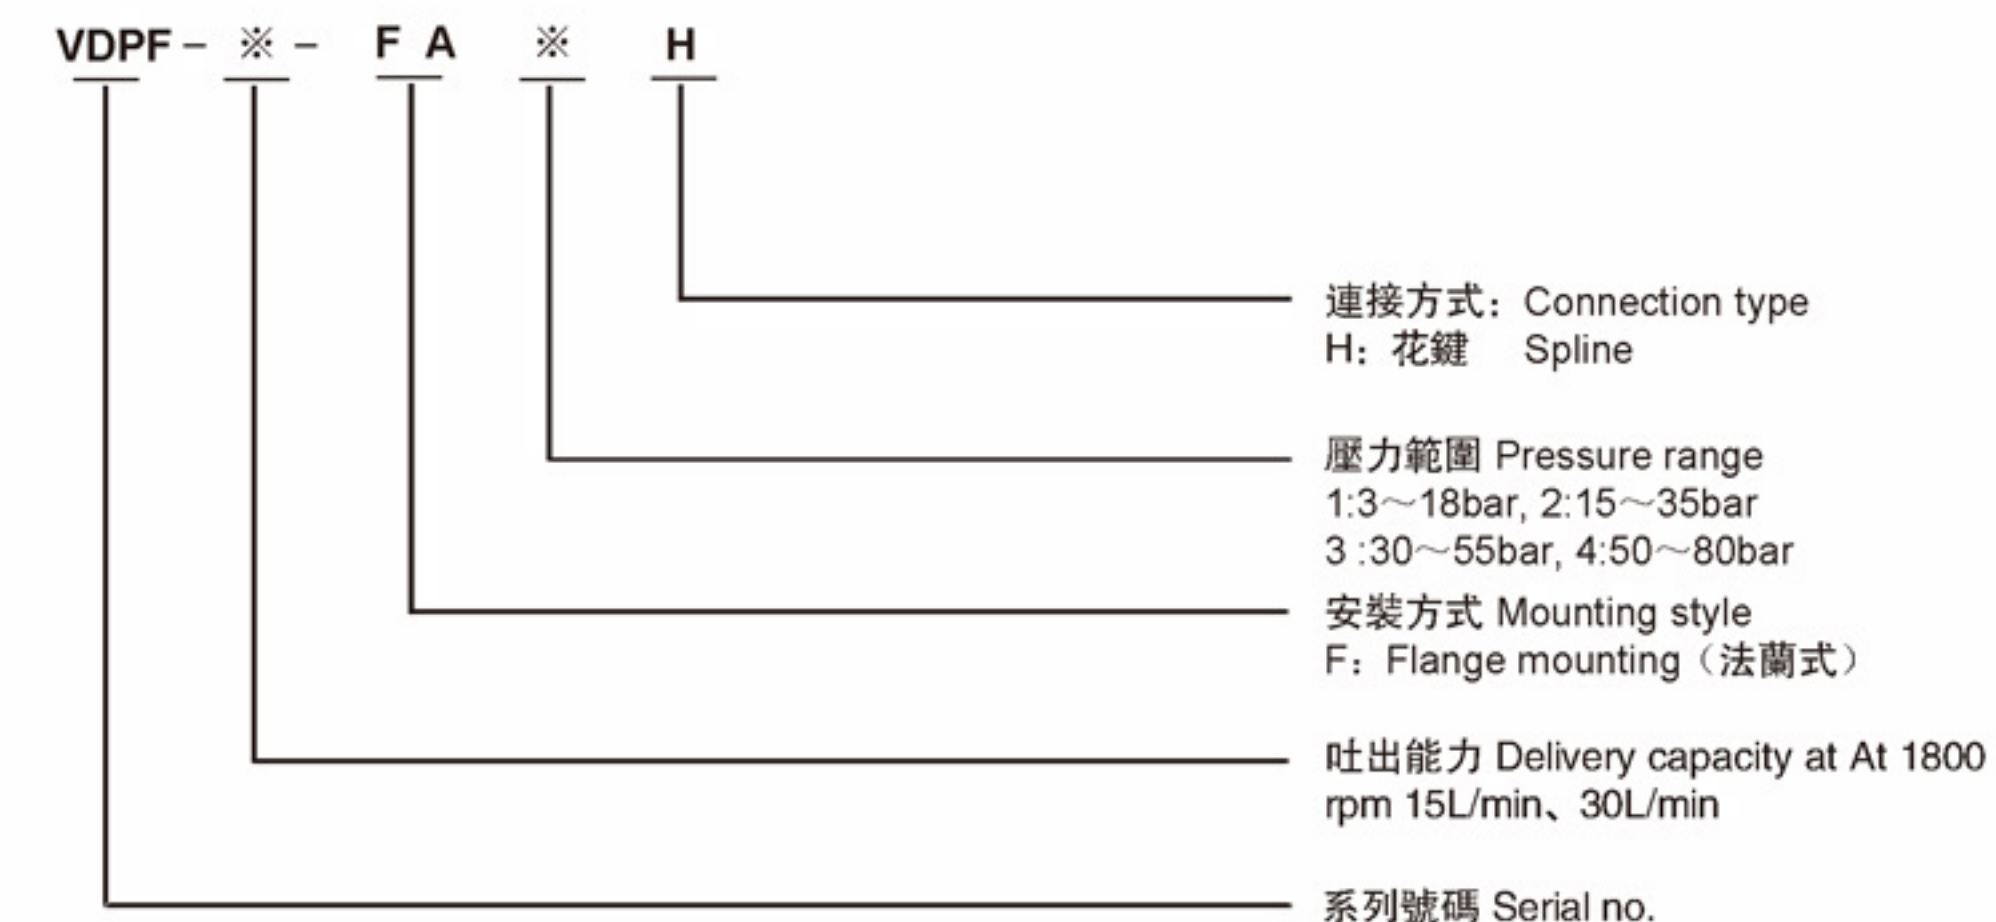

規格/SPECIFICATIONS:

型式 Model	吐出能力 Delivery capacity(1800rpm)	壓力調整範圍 Pressure adj. range	額定速度 Rated speed	
			最高 Max.	最低 Min.
VDPF-15	15 L/min	3 ~ 80bar	1800 rpm	800 rpm
VDPF-30	30 L/min	3 ~ 80bar		

特點:

本系列油泵，操作時噪音小，運轉滑順，耐摩耗，適于工作母機及專用機使用。

內藏式自動壓力補償設計，性能優越，溫升低，更節能。

FEATURES:

This series pump which being with low noise level, running smoothly and wear resistant, Especially, those are very suitable for machine tool & special purpose m/c use.

Designed of emersed pressure compensating, excellent performance, small temperature rise, much more energy saving.

Technical drawing of the front view of a pump assembly. The drawing shows a central circular body with a hexagonal flange. At the top is a mounting bracket with a central nut and two side bolts. On the left is an outlet port (PT1/2) and on the right is an inlet port (PT3/4). A drain port (PT1/4) is located on the top left. Dimensions are provided: overall width 108.3, overall height 130.7, outlet port diameter 11.5, inlet port diameter 17.5, and mounting bracket width 103. A small dimension of 4.0 is shown for the central bore.

尺寸圖/DIMENSIONS:

NVP-23、26、30、40

壓力調整螺栓
PRESSURE ADJUSTING BOLT

○ 提升壓力
○ 降低壓力

PT1/4
接出口
DRAIN PORT

PT1/2
接出口
OUTLET PORT

PT3/4
接出口
INLET PORT

DR

OUT

147.4

85.1

90X90

63.7

60

136.7

4.76⁺⁰_{-0.025}

21.4^{+0.2}₋₀

4-ø11

22.4

59.4

37.6

155.5

4

ø19.05⁺⁰_{-0.021}

ø95.02^{+0.02}₋₀



本系列泵浦，外觀新穎，操作時嘈音小，運轉滑順，耐摩耗，適于工作母機及專用機使用。


溫升小，馬力損失小，內藏式自動壓力補償設計。

FEATURES:

This series pump which being with novel appearance low noise level, runningsmoothly and wear resistant. Especially, thouse are very suitable for machine tool & special purpose m/c use.

Little temp upward & little power lose and designed of auto emerged pressure compensating.

訂購索引/ORDERING INDEX:

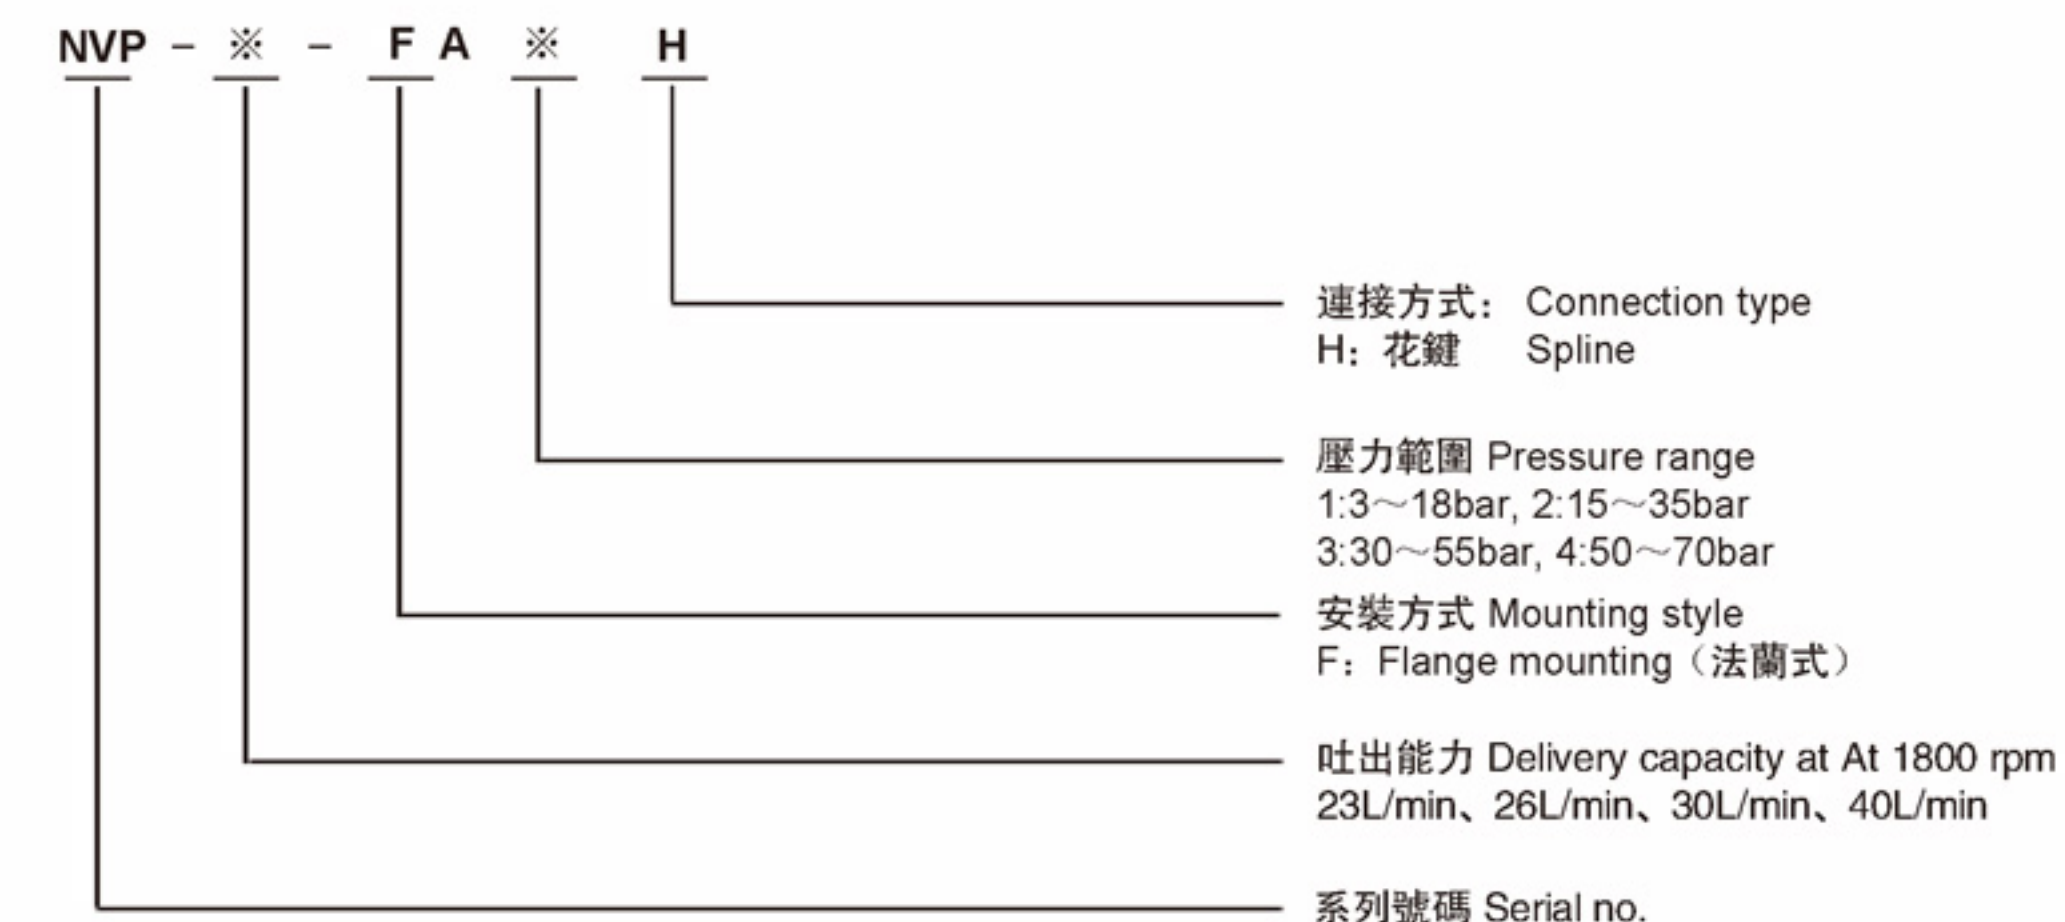

規格/SPECIFICATIONS:

型式 Model	吐出能力 Delivery capacity(1800rpm)	壓力調整範圍 Pressure adj. range	額定速度 Rated speed	
			最高 Max.	最低 Min.
NVP-23	23 L/min	3 ~ 70bar	1800 rpm	800 rpm
NVP-26	26 L/min	3 ~ 70bar		
NVP-30	30 L/min	3 ~ 70bar		
NVP-40	40 L/min	3 ~ 70bar		



型式 Model	吐出能力 Delivery capacity(1800rpm)		最大壓力 Max. pressure (kgf/cm ²)	額定速度 Rated speed	
	前泵 Front pump	後泵 Rear pump		最高 Max.	最低 Min.
VP-1212	12 l/min	12 l/min	3 ~ 18 bar 15 ~ 35 bar 30 ~ 55 bar 50 ~ 70 bar	1800 rpm	800 rpm
VP-1515	15 l/min	15 l/min			
VP-2020	20 l/min	20 l/min			
VP-2323	23 l/min	23 l/min			
VP-2626	26 l/min	26 l/min			
VP-3030	30 l/min	30 l/min			
VP-4040	40 l/min	40 l/min			

[illegible]



特點:

本系列泵浦，操作時噪音小，運轉滑順，耐摩耗，適于工作母機及專用機使用。
溫升小，馬力損失小，內藏式自動壓力補償設計。

FEATURES:

This series pump which being with low noise level, running smoothly and wear resistant. Especially, those are very suitable for machine tool & special purpose m/c use.
Little temp upward & little power lose and designed of auto emersed pressure compensating.


訂購索引/ORDERING INDEX:



規格/SPECIFICATIONS:





型式 Model	吐出能力 Delivery capacity(1800rpm)	壓力調整範圍 Pressure adj. range	額定速度 Rated speed	
			最高 Max.	最低 Min.
HVP-30	30 L/min	35~140bar	1800 rpm	800 rpm
HVP-40	40 L/min	35~140bar		

尺寸圖/DIMENSIONS: HVP-30、40

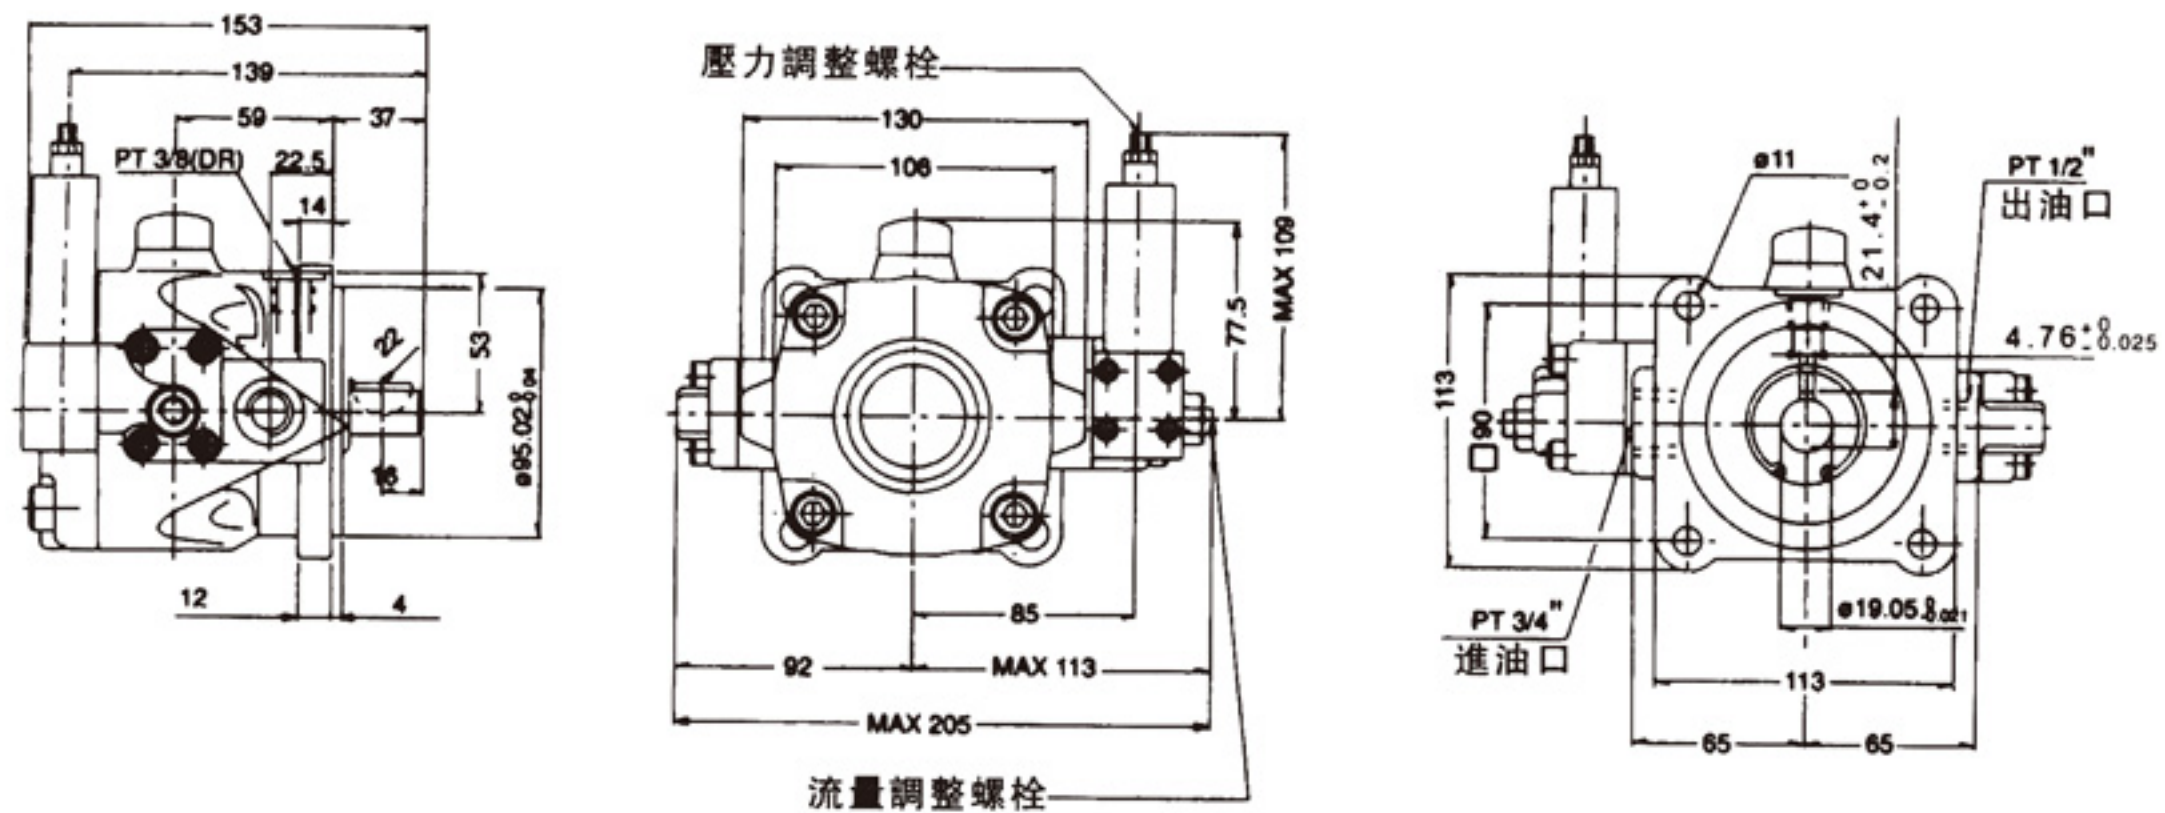

性能曲綫

A 壓力-流量-輸入功率特性

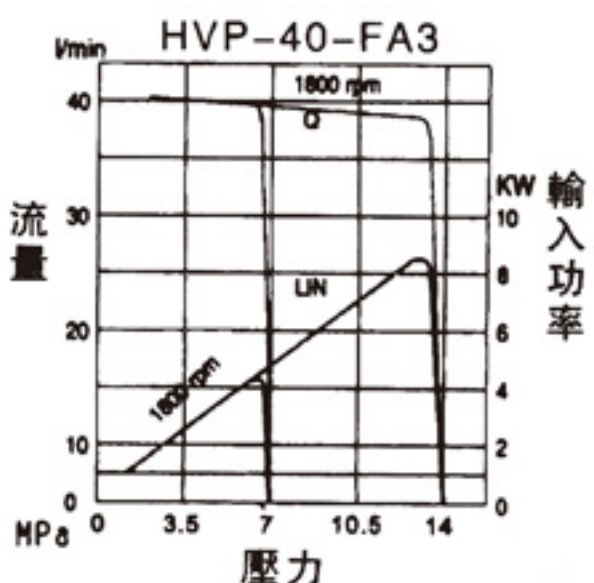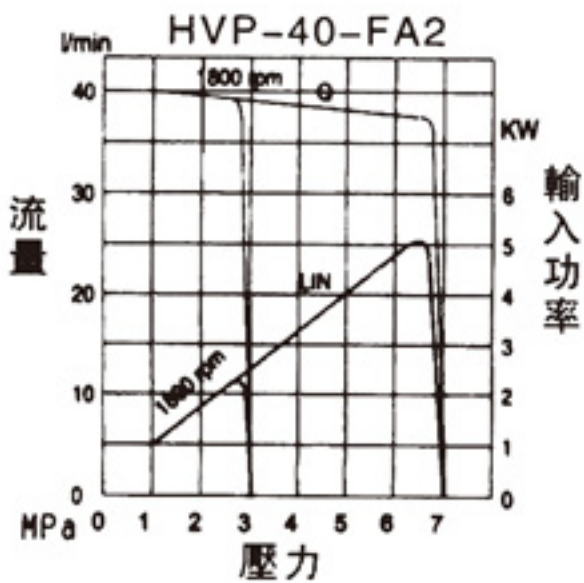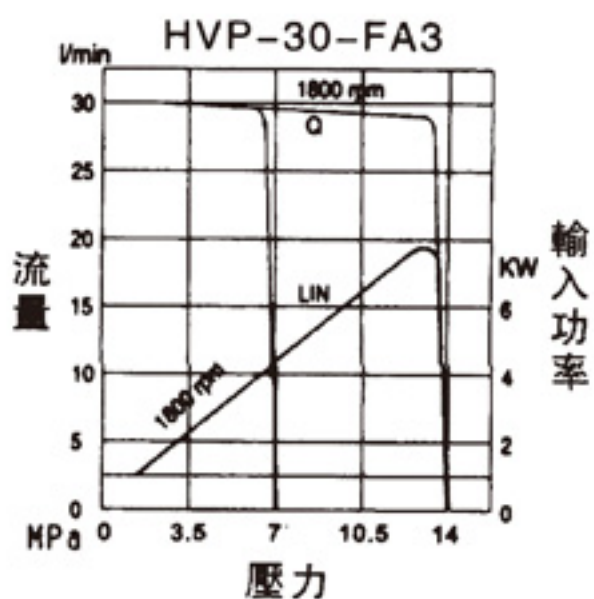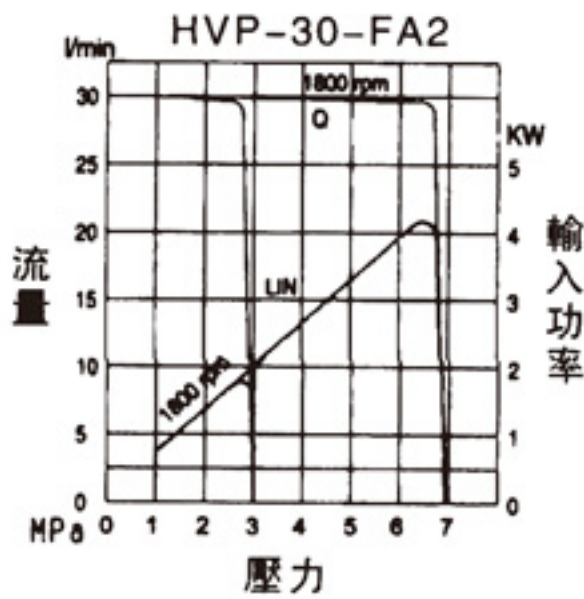




特點：
共用同一心軸及馬達，節省空間，本組合泵因採用一小流量之齒輪泵，而形成一高低壓泵組合。
噪音小、效率高，運轉滑順。

FEATURES:
Employed same shaft & motor, save occupied space, Since, this combination pump is adopted a small flow rate gear pump and formed a hi-low pressure pump set.
Low noise level, hi-efficiency, and running smoothly.



訂購索引/ORDERING INDEX:

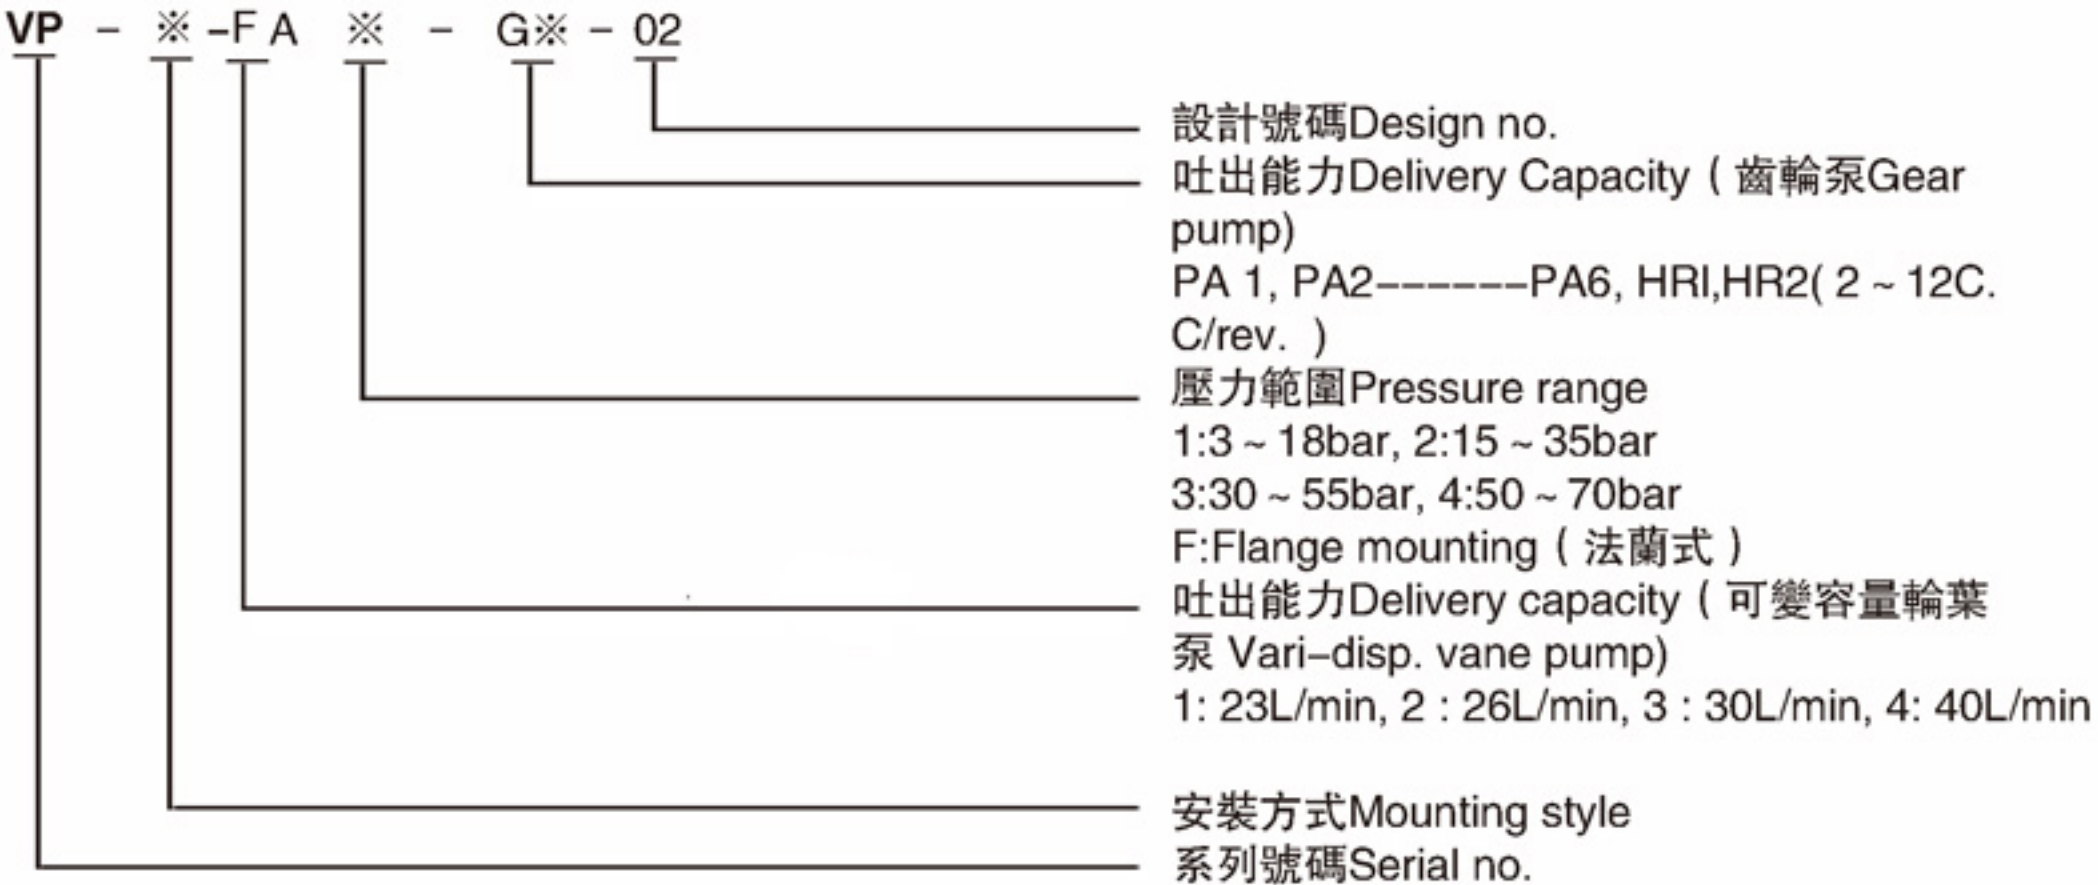


規格/SPECIFICATIONS:

型式 Model	齒輪泵 Gear pump		可變量泵 Vari-disp. vane pump		額定速度 Rated speed	
	最大壓力 Max. pres.	吐出能力 Del iv. Cap.	最大壓力 Max. pres.	吐出能力 Del iv. Cap.	最高 Max.	最低 Min.
VP-23-G	210bar	2 ~ 12c. c/rev.	70bar	23L/min	1800 rpm	800 rpm
VP-26-G				26L/min		
VP-30-G				30L/min		
VP-40-G				40L/min		

尺寸圖/DIMENSIONS:

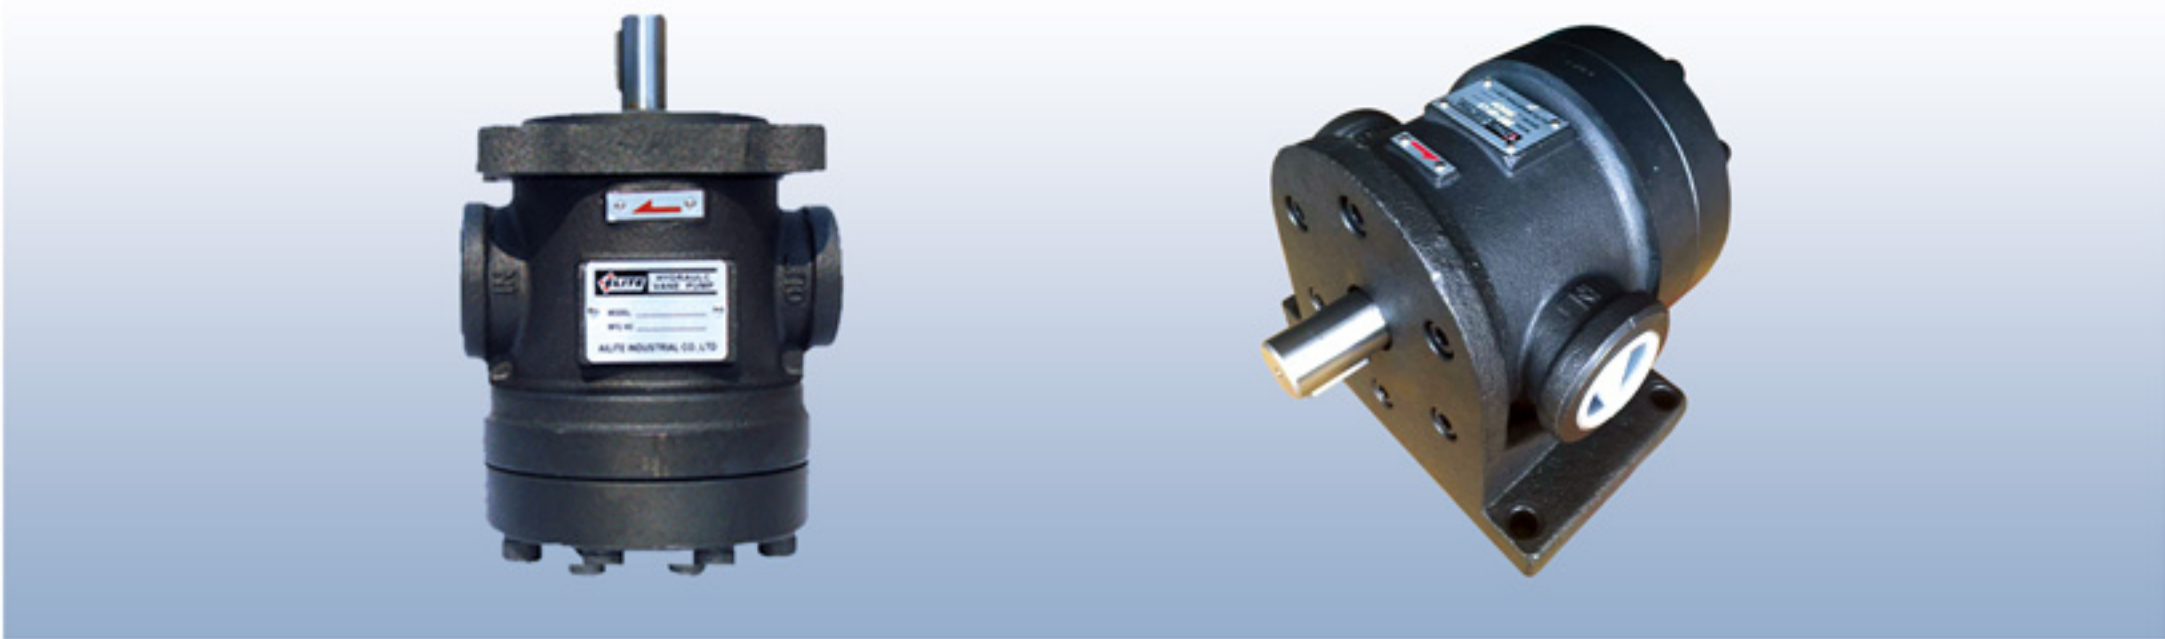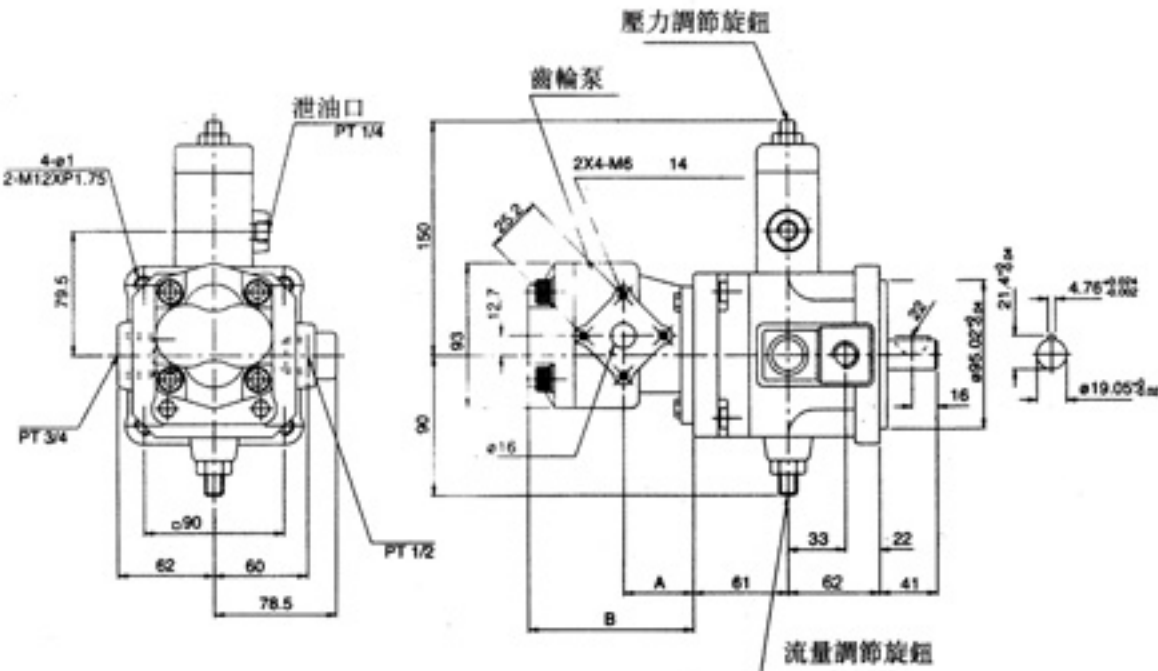

訂購索引/ORDERING INDEX:

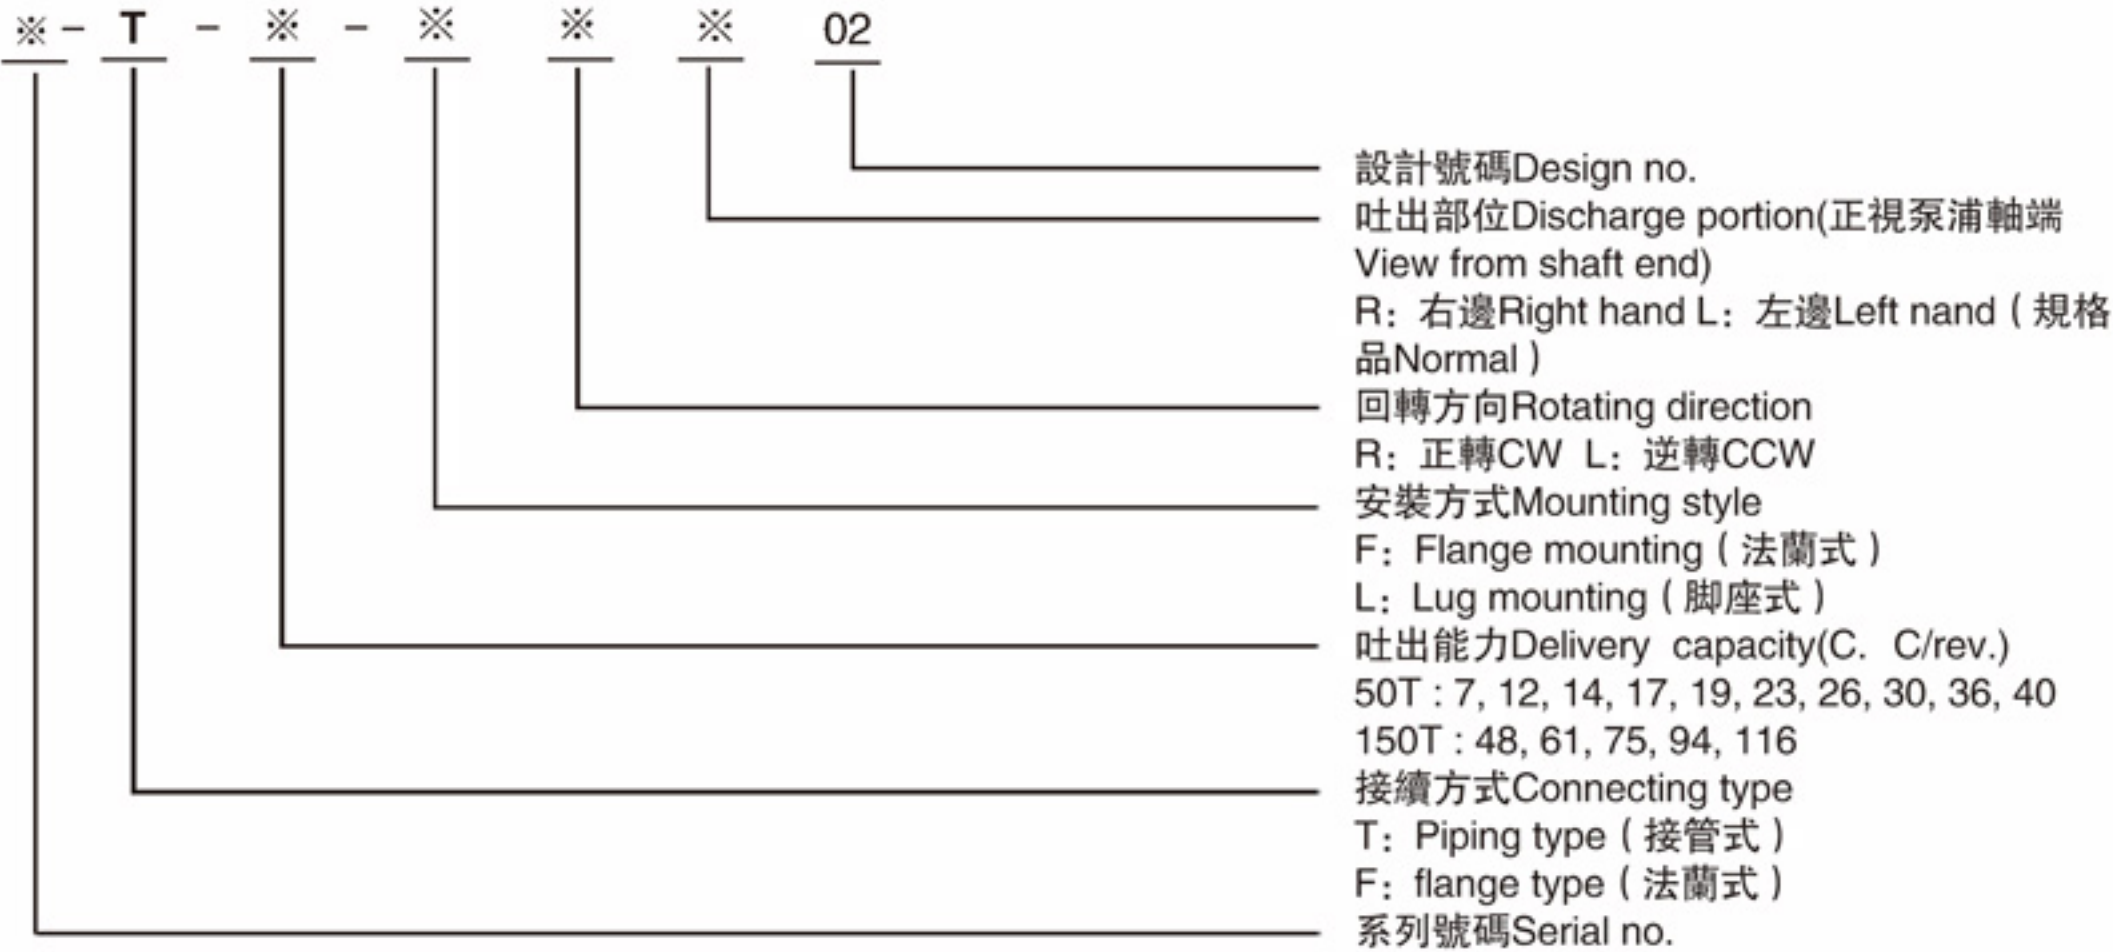


規格/SPECIFICATIONS:


型式 Model	吐出能力 Delivery capacity				最大壓力 Max. pressure(kgf/cm ²)	額定速度 Rated speed	
	回轉速度(rpm)Running speed					最高 Max.	最低 Min.
	1000	1200	1500	1800			
50T-07	—	8.2	10.3	12.5	70	1800	950
50T-12	12	14.4	18.0	21.6		1800	950
50T-14	14.6	17.5	21.7	26.1		1800	950
50T-17	17.0	20.3	25.5	31.5		1800	950
50T-19	19.2	23.0	28.8	34.6		1800	950
50T-21	21.1	25.3	31.7	38.0		1800	950
50T-23	23	27.6	34.5	41.4		1800	950
50T-26	26.2	31.4	39.3	47.2		1800	950
50T-30	30.1	3.1	45.2	54		1800	950
50T-36	36.2	41.4	54.3	64		1500	950
50T-40	41.5	49.4	—	—		1200	950
150T-48	48.3	57.9	72.4	86.9	70	1800	900
150T-61	61.5	73.8	92.2	110.7		1800	900
150T-75	75.5	90.6	113.2	135.9		1500	900
150T-94	94.2	113.0	141.3	168		1500	900
150T-116	116.3	139.6	174	—		1200	900

尺寸圖/DIMENSIONS:

50T 法兰式 Flange Type

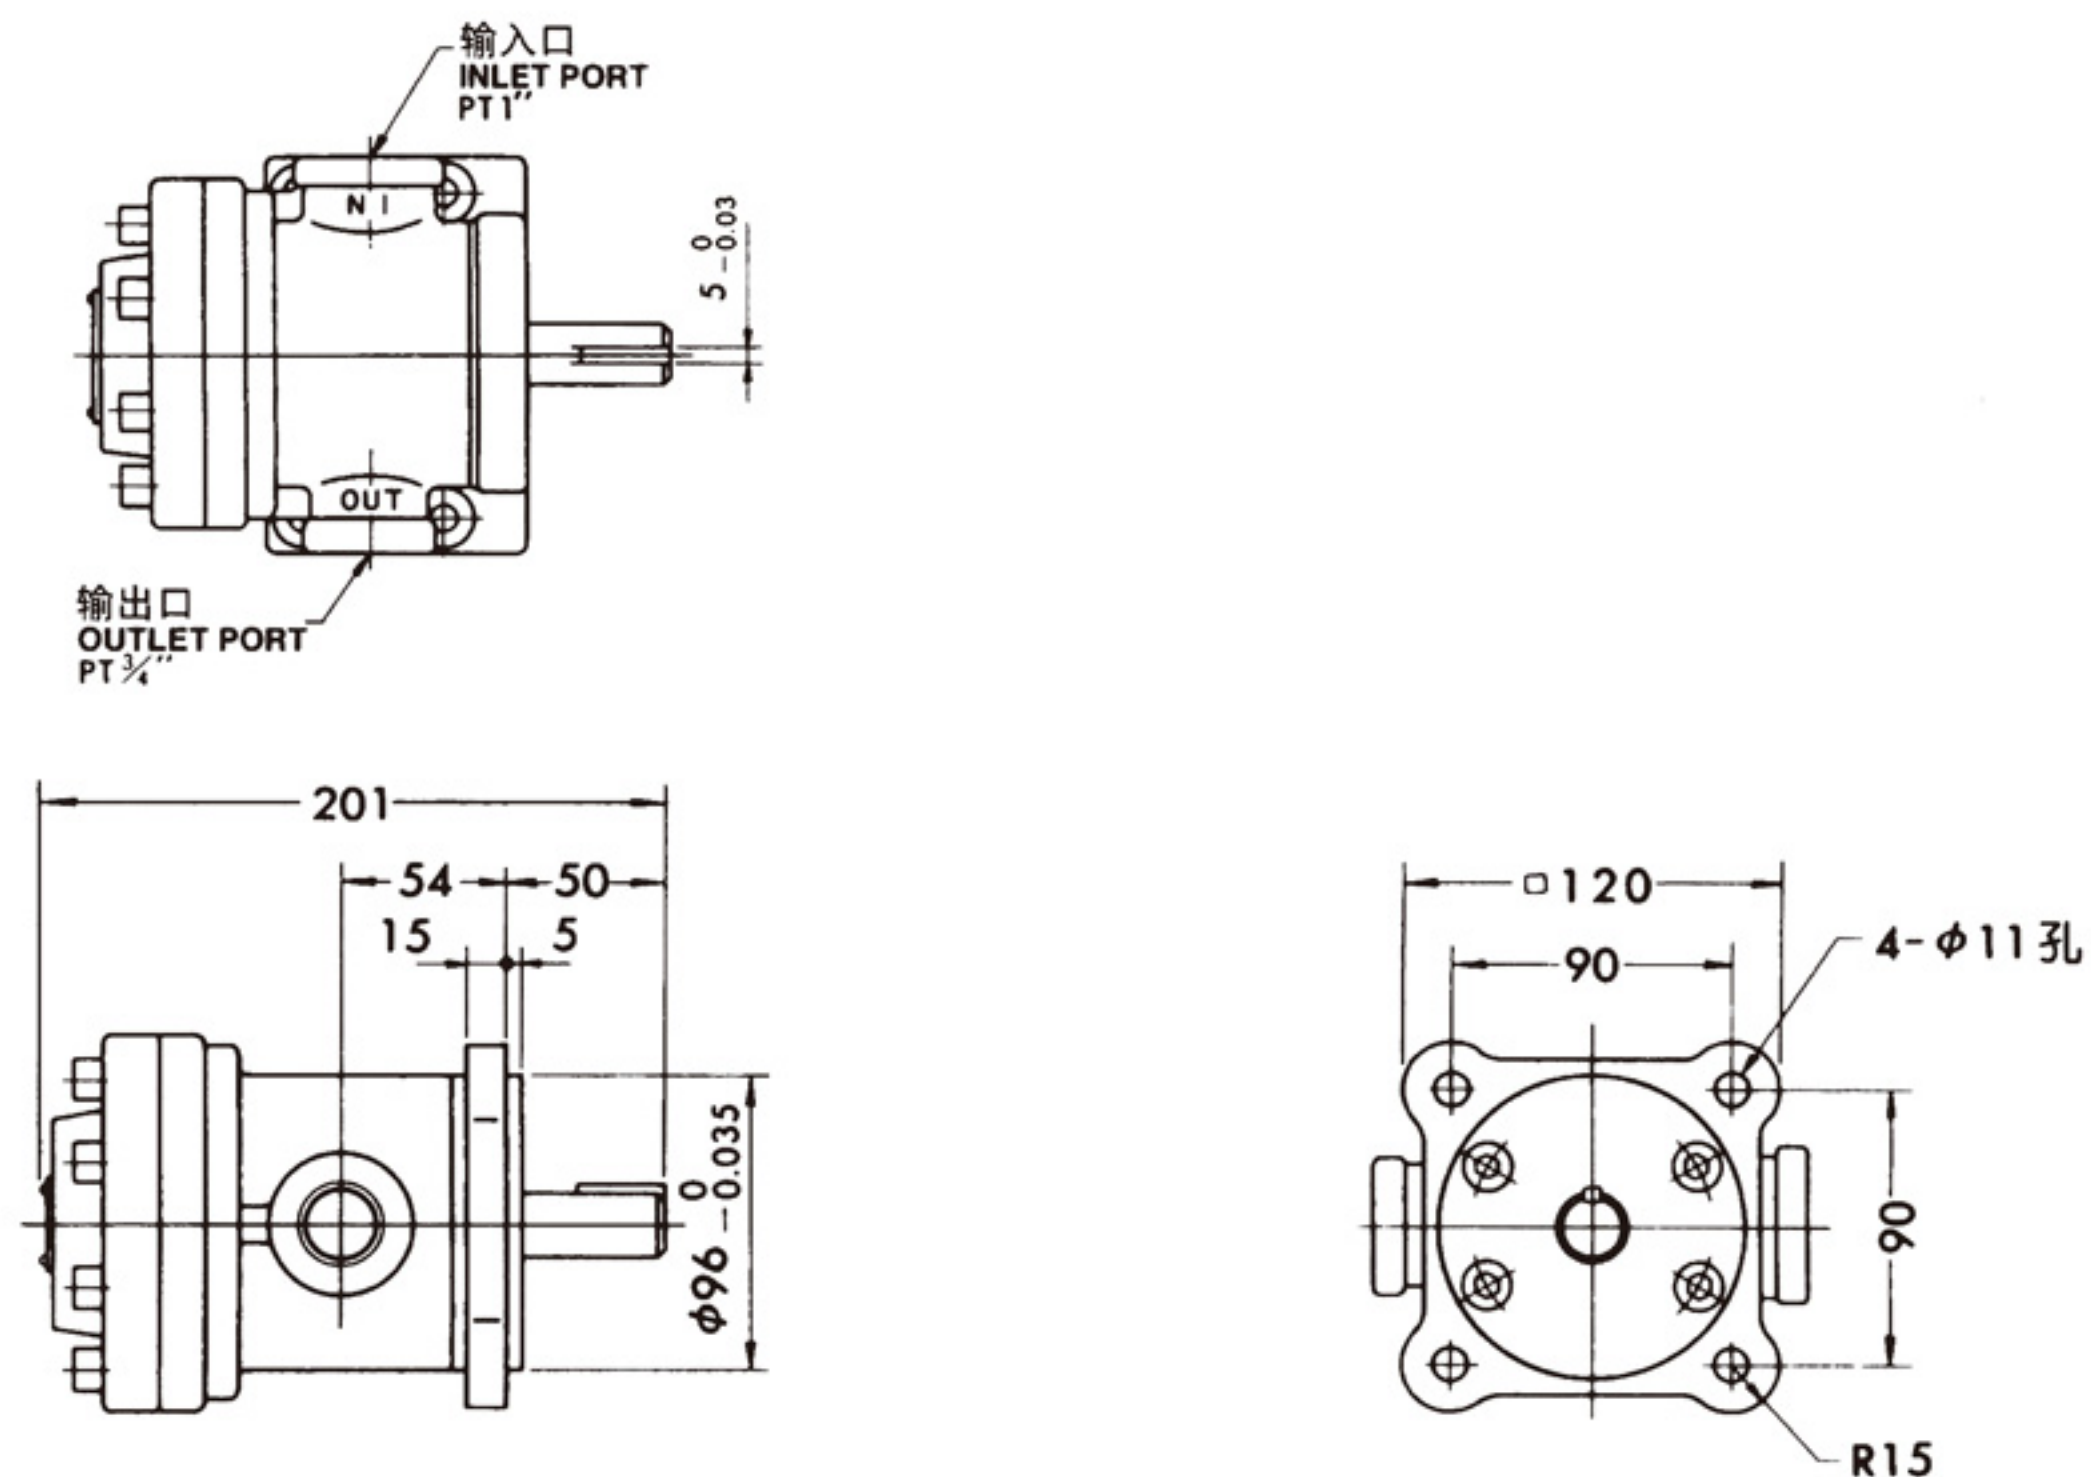


50T 脚座式 Lug Type

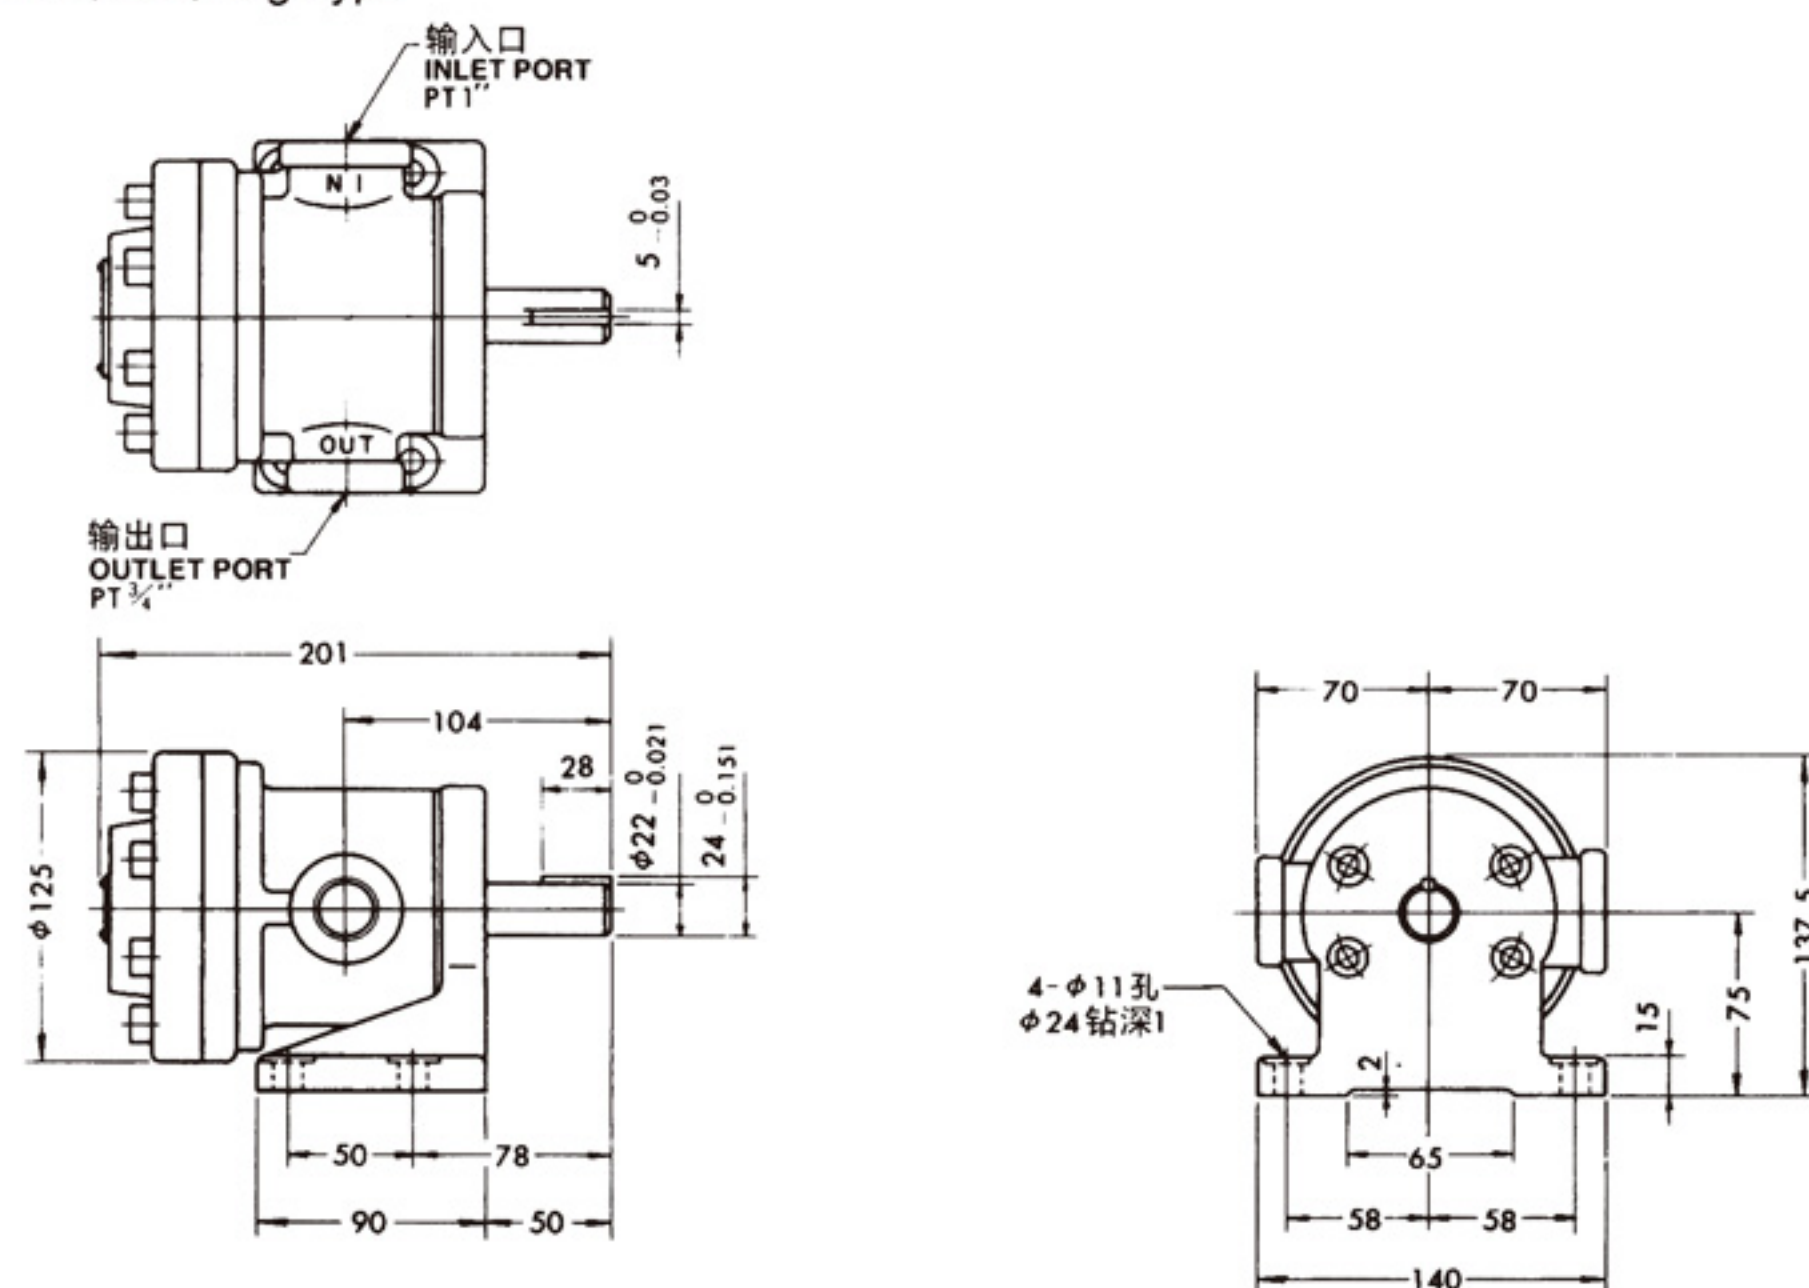


尺寸圖/DIMENSIONS:

150T 法兰式 Flange Type

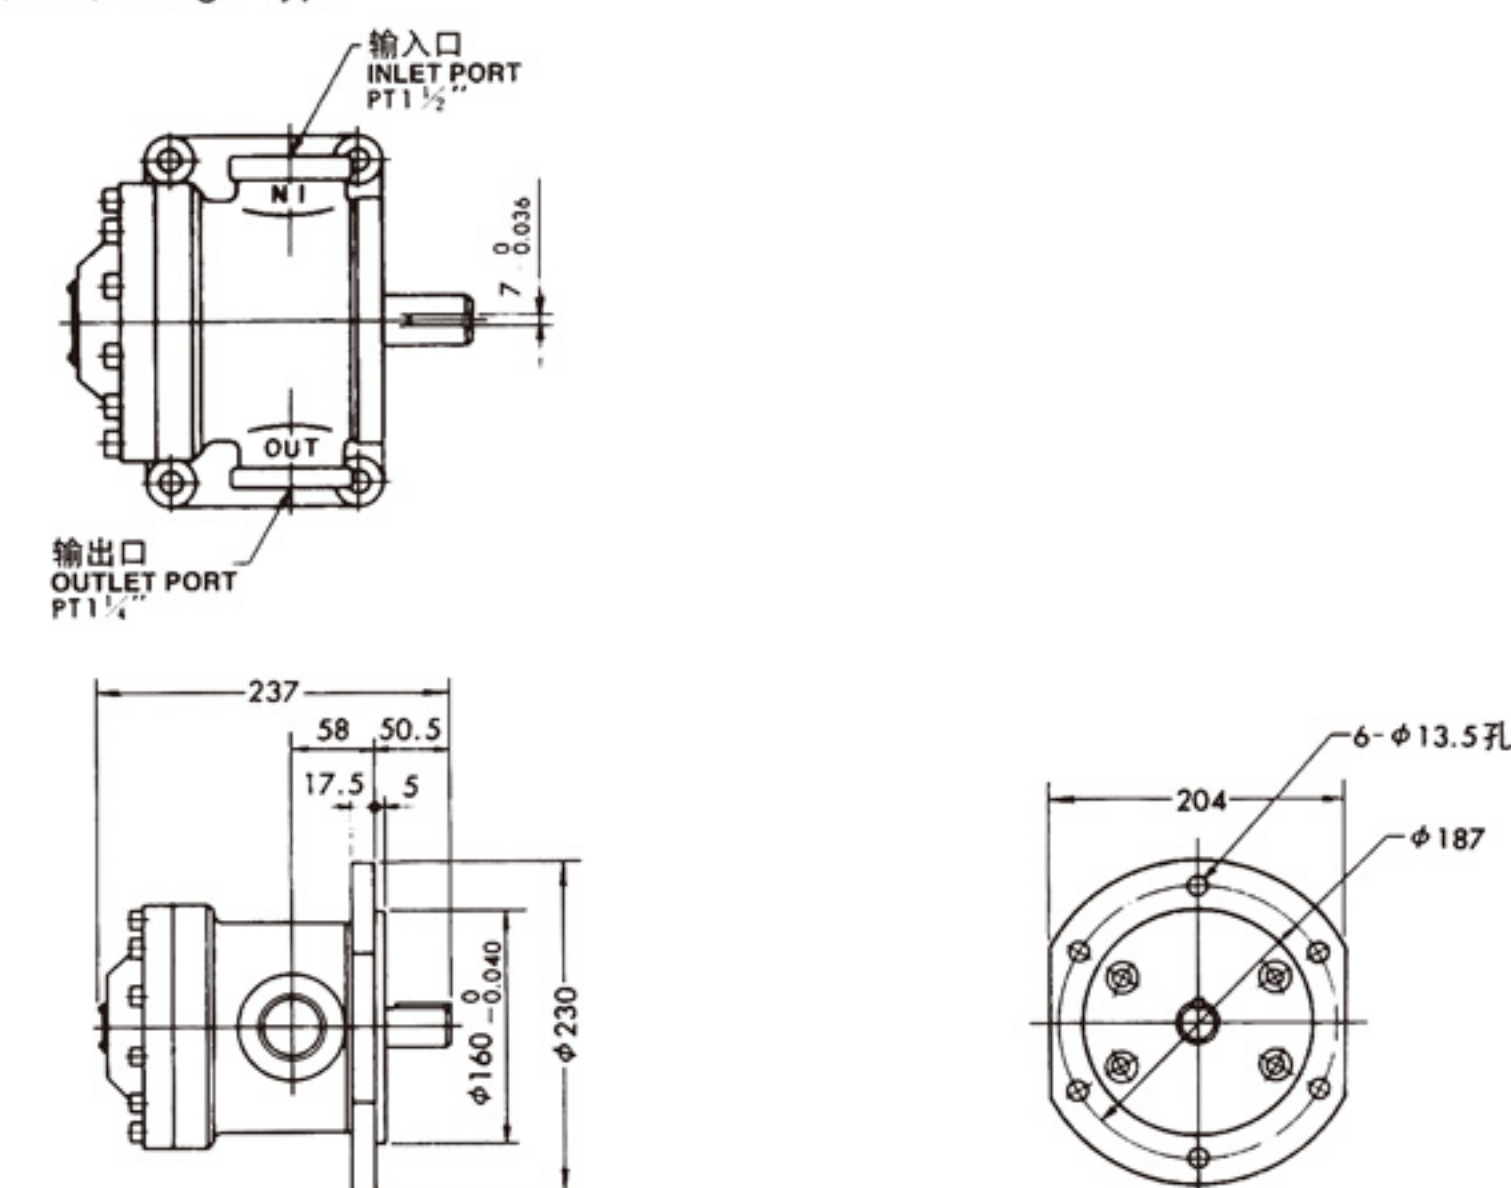

150T 脚座式 Lug Type

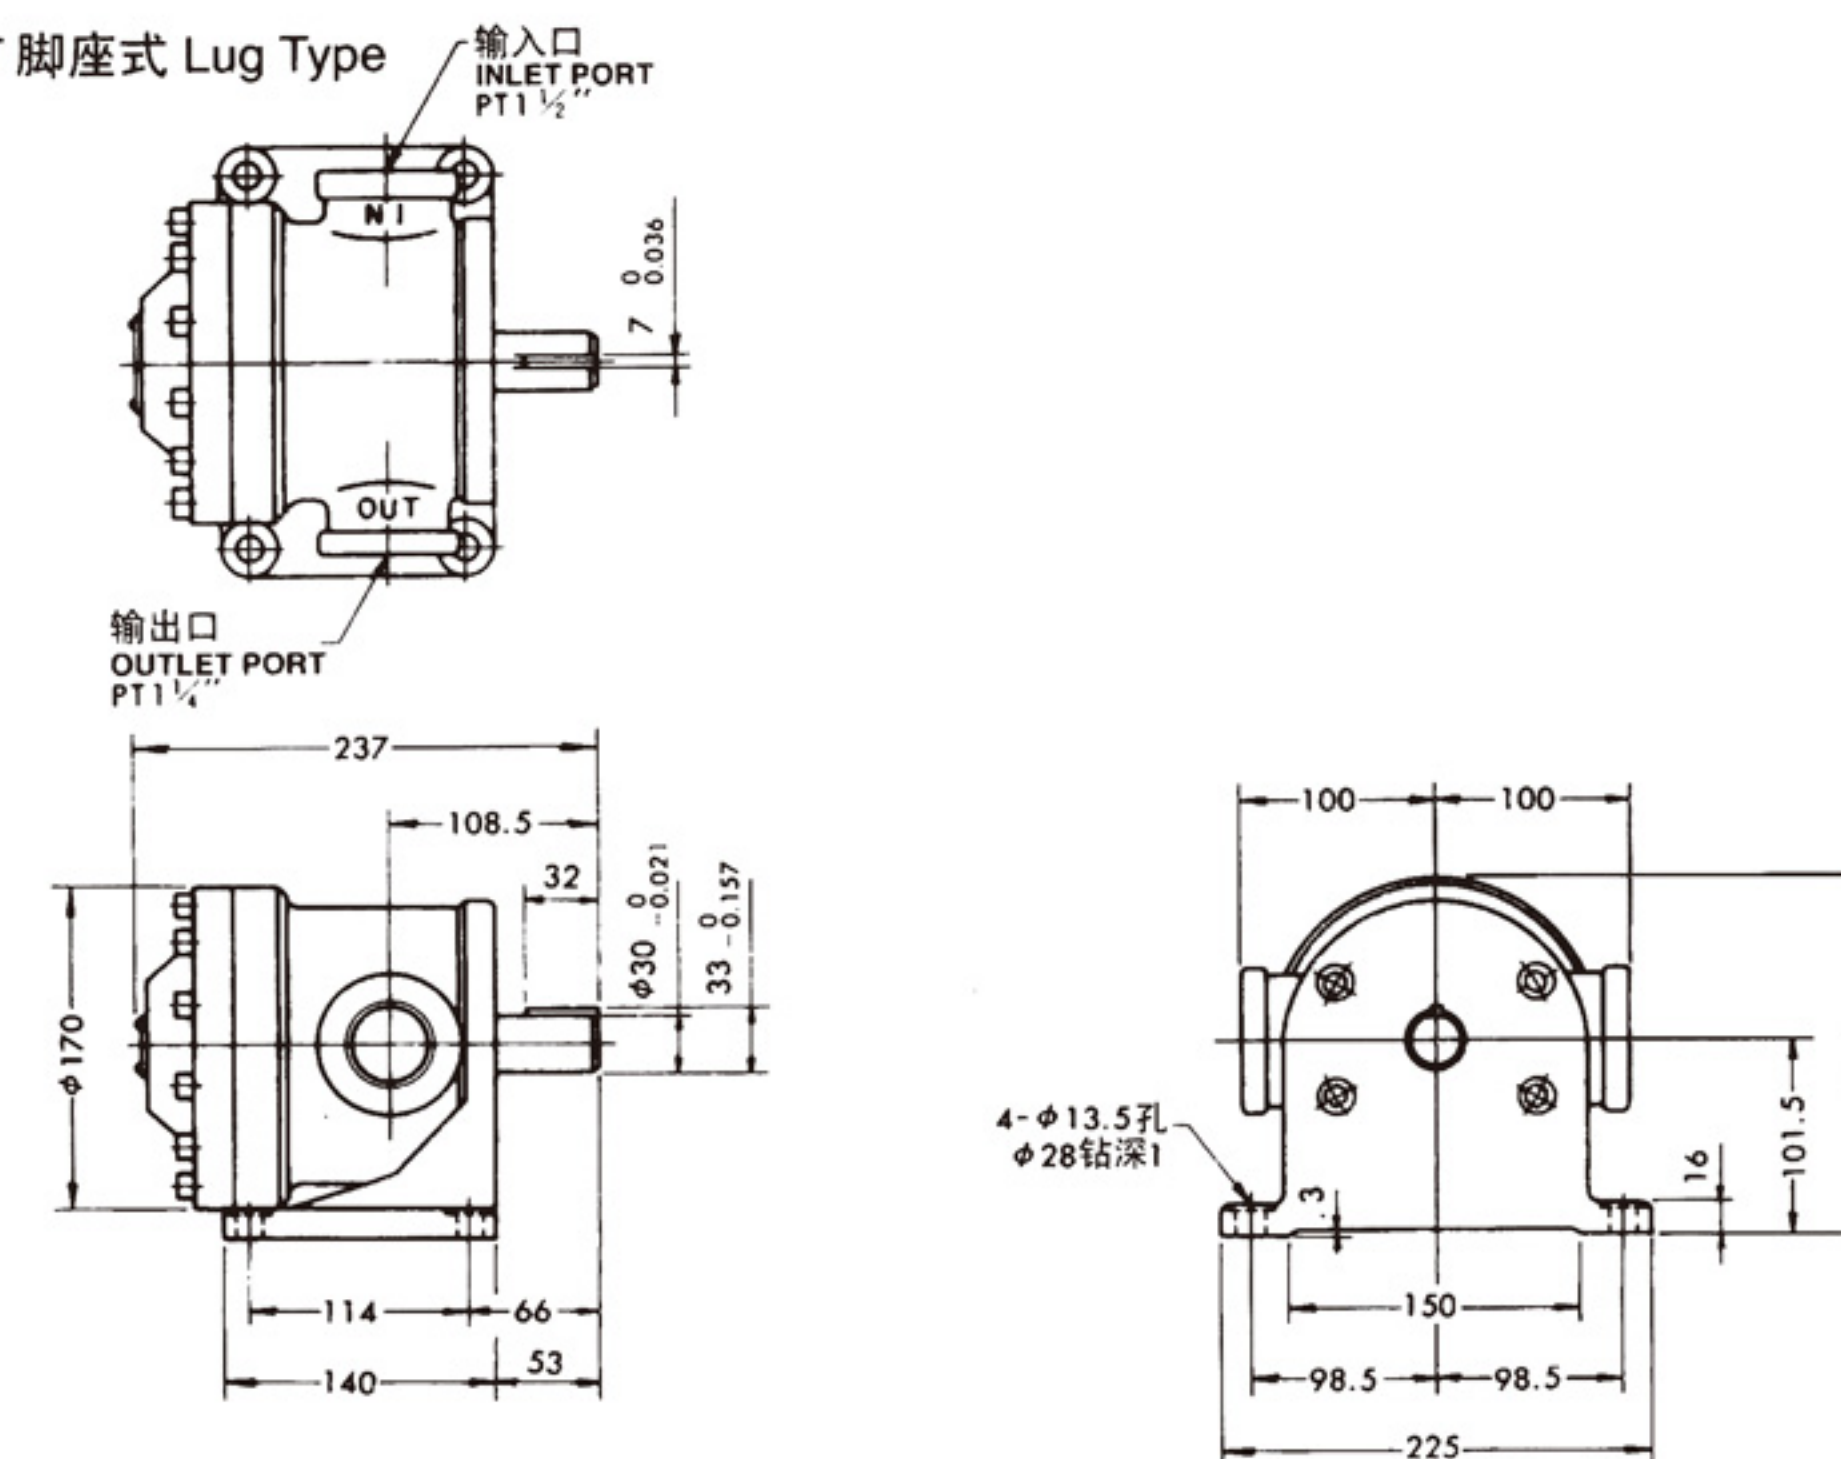




特點：
共用同一心軸及馬達，節省空間。
阻抗低之吸入口設計，運轉滑順，穩定性高，嘈音小。
備有正逆轉及軸徑22mm供客戶選擇（一般軸徑為19mm。）

FEATURES:
Employed same shaft & motor, occupied little space.
Designed of suction orifice for low suction resistance runningsmoothly, hi-stability & low noise level.
Equipped with forward-reverse rotating and 22 mm shaftdia, etc., for customer to select (In general, shaft dia 19mm).

訂購索引/ORDERING INDEX:

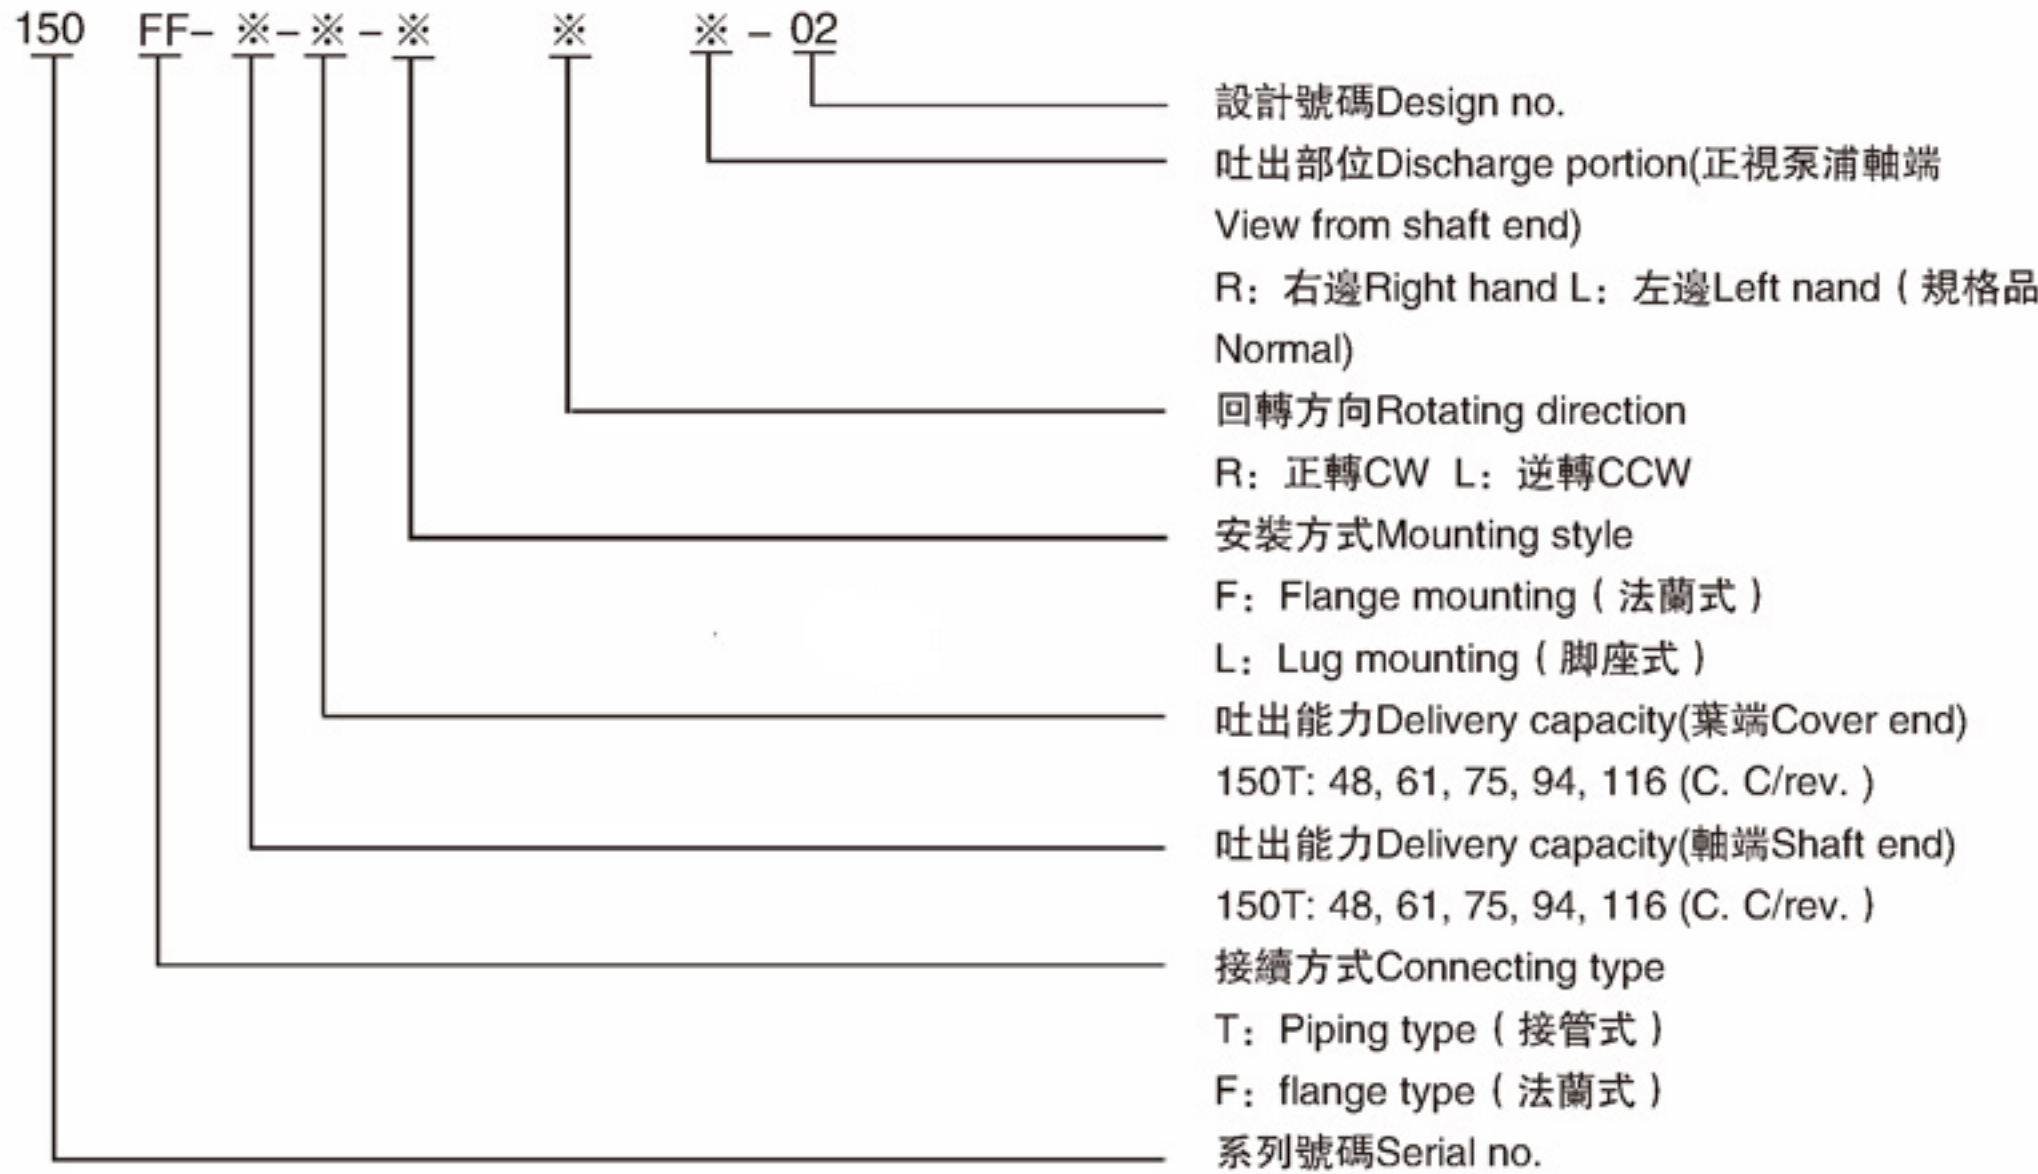


規格/SPECIFICATIONS:


型式 Model	吐出能力 Delivery capacity				最大壓力 Max. pressure (kgf/cm ²)1000	額定速度 Rated speed	
	回轉速度(rpm)Running speed					最高 Max.	最低 Min.
	1000	1200	1500	1800			
150T-48	48.3	57.9	72.4	86.9	90	1800	900
150T-61	61.5	73.8	92.2	110.0	90	1800	
150T-75	75.5	90.6	113.2	135.9	90	1500	
150T-94	94.2	113.0	141.3	—	70	1500	
150T-116	116.3	139.6	—	—	70	1200	
150T-48	48.3	57.9	72.4	86.9	90	1800	
150T-61	61.5	73.8	92.2	110.7	90	1800	
150T-75	75.5	90.6	113.2	135.9	90	1500	
150T-94	94.2	113.0	141.3	—	70	1500	
150T-116	116.3	139.6	—	—	70	1200	

尺寸圖/DIMENSIONS:

150F + 150F 法蘭式 Flange Type

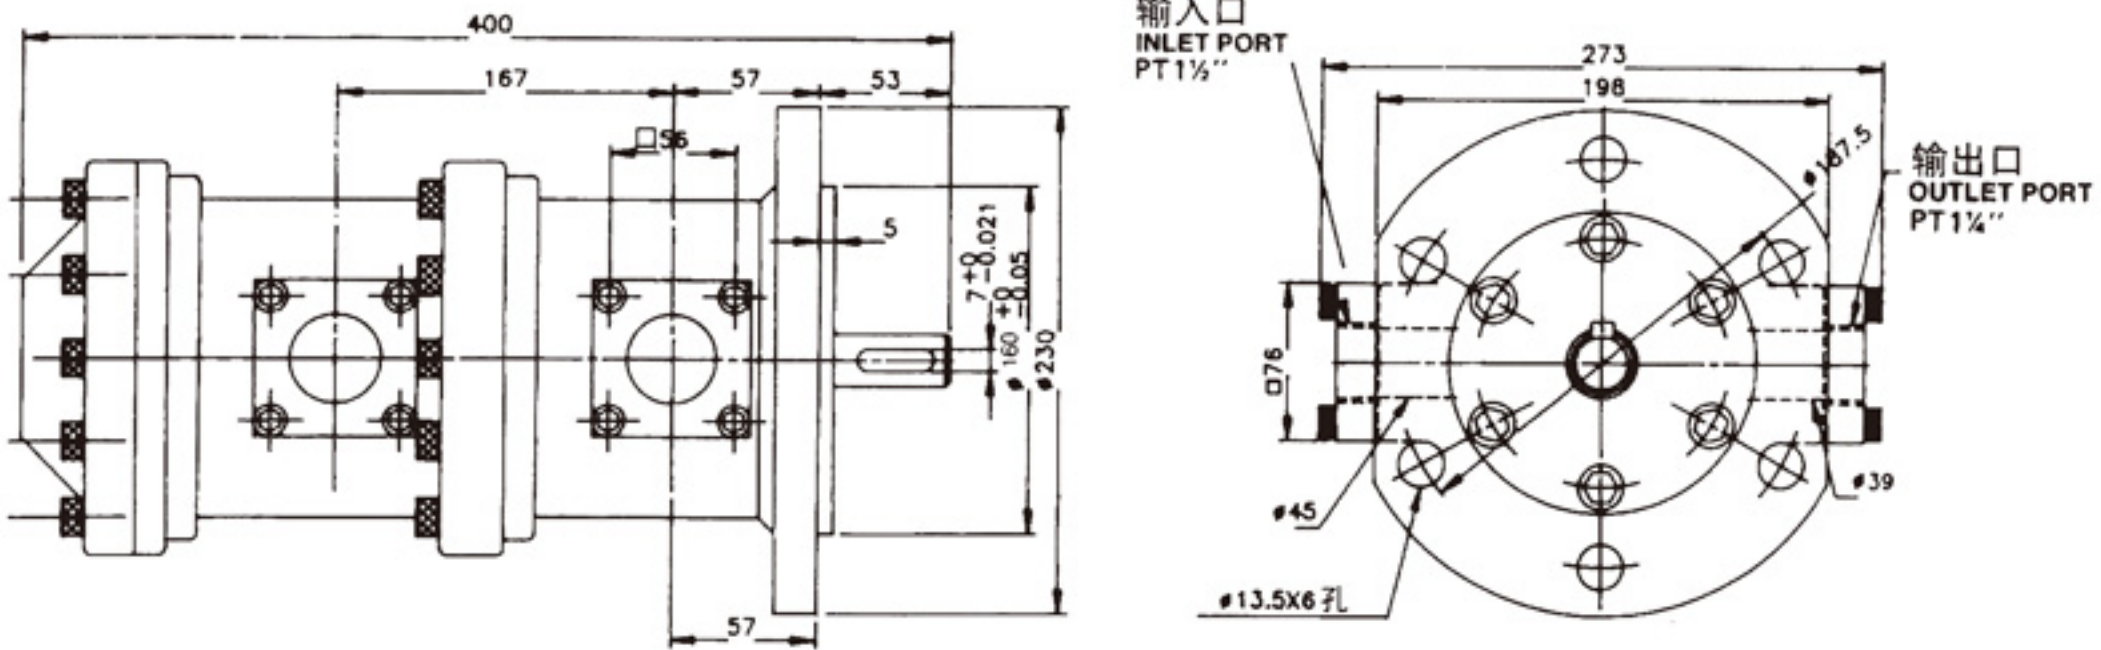


150F + 150F 腳座式 Lug Type

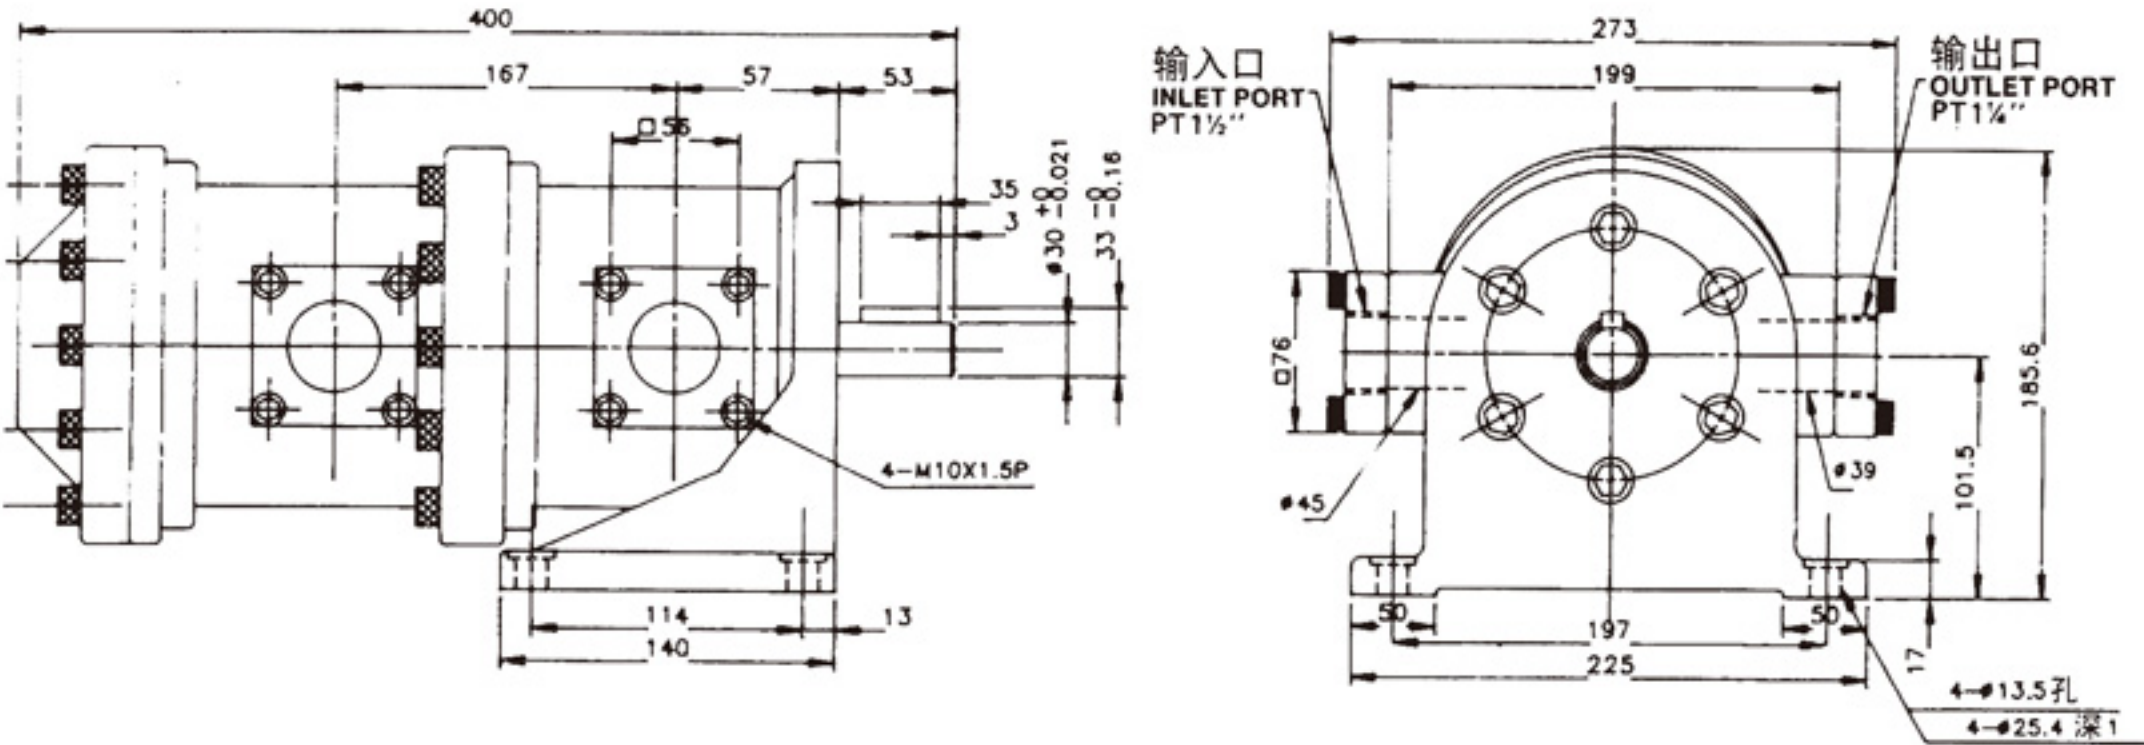


**規格/SPECIFICATIONS:**25


50T+PA 法兰式 Flange Type



150T + PA

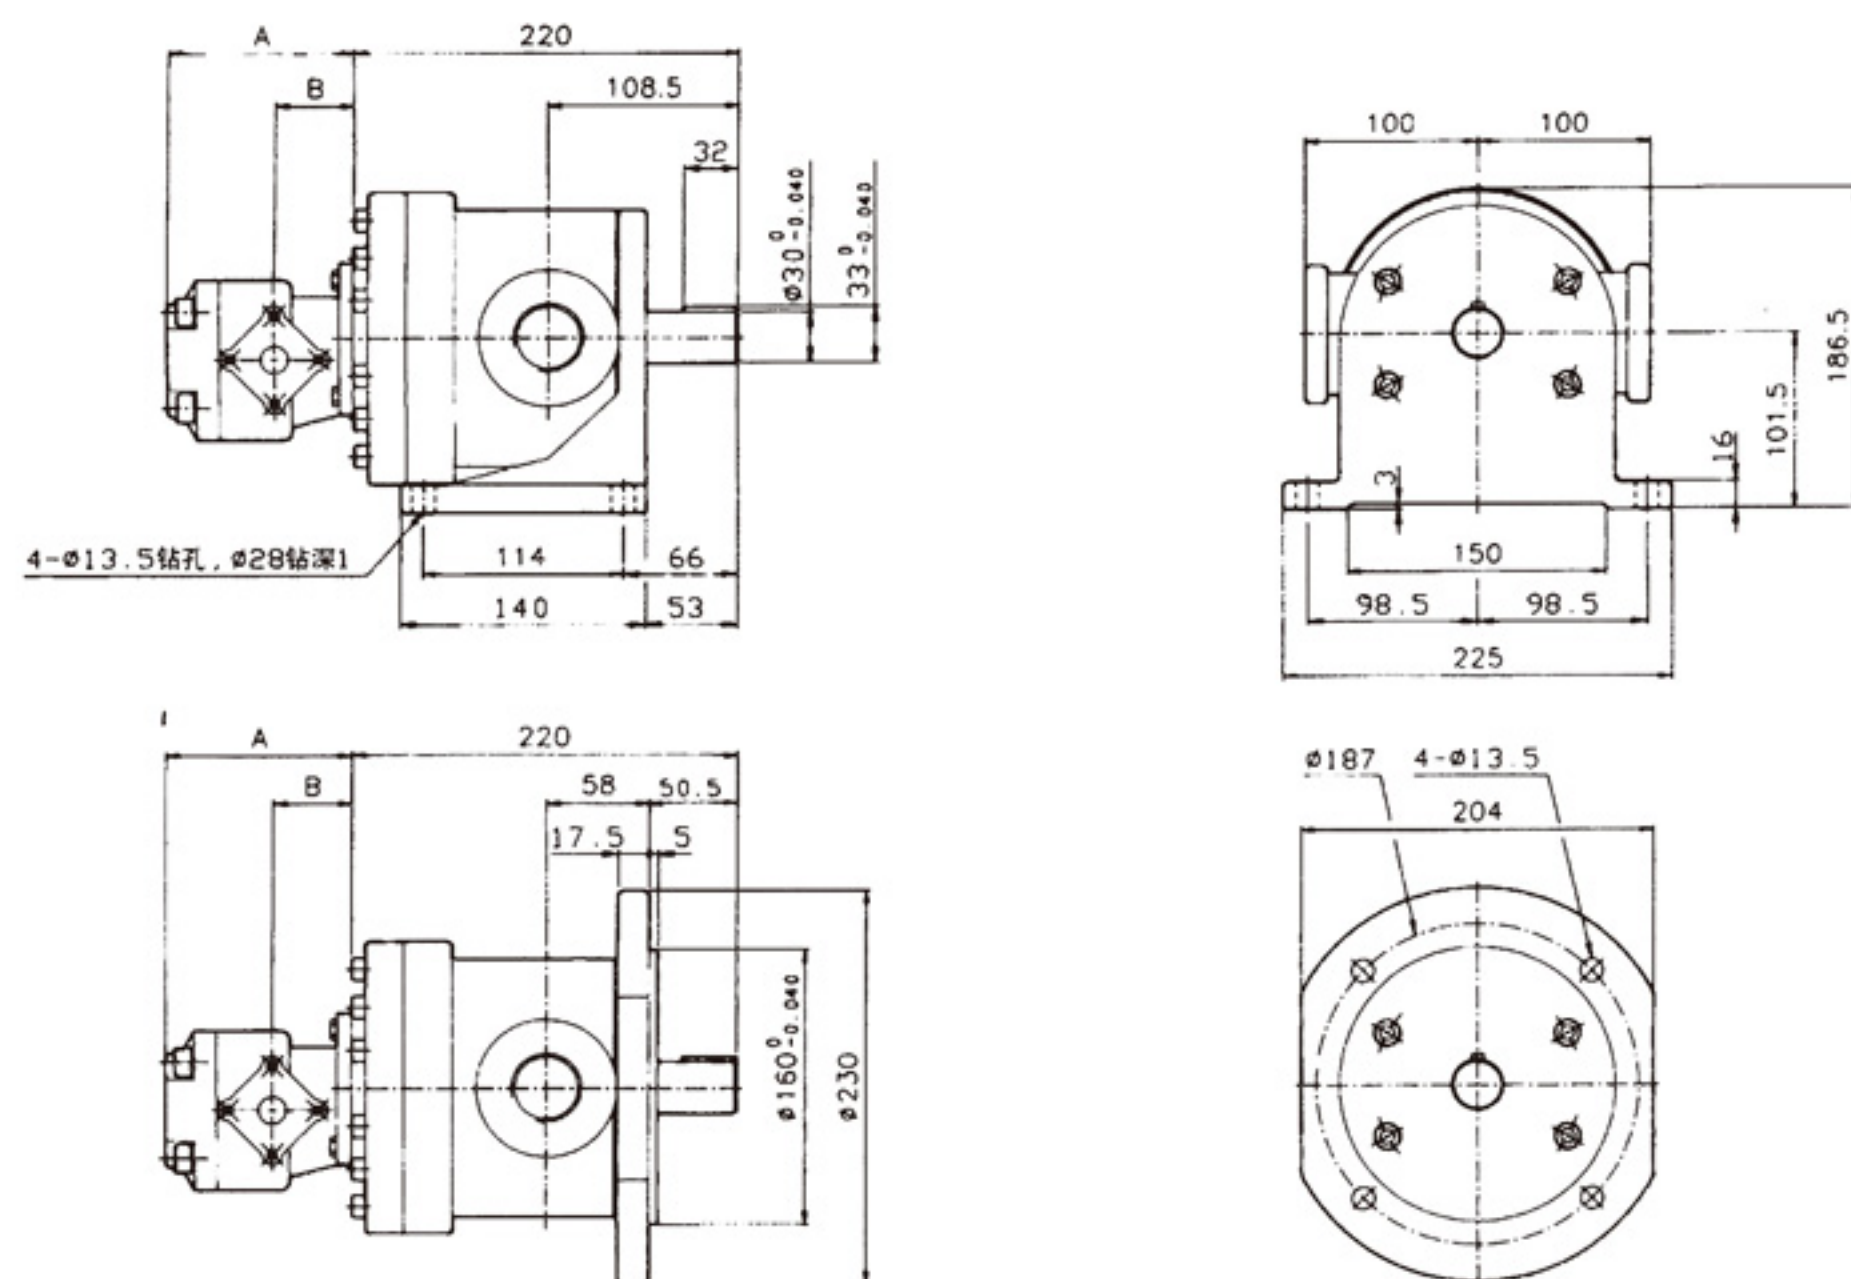

150T + PB

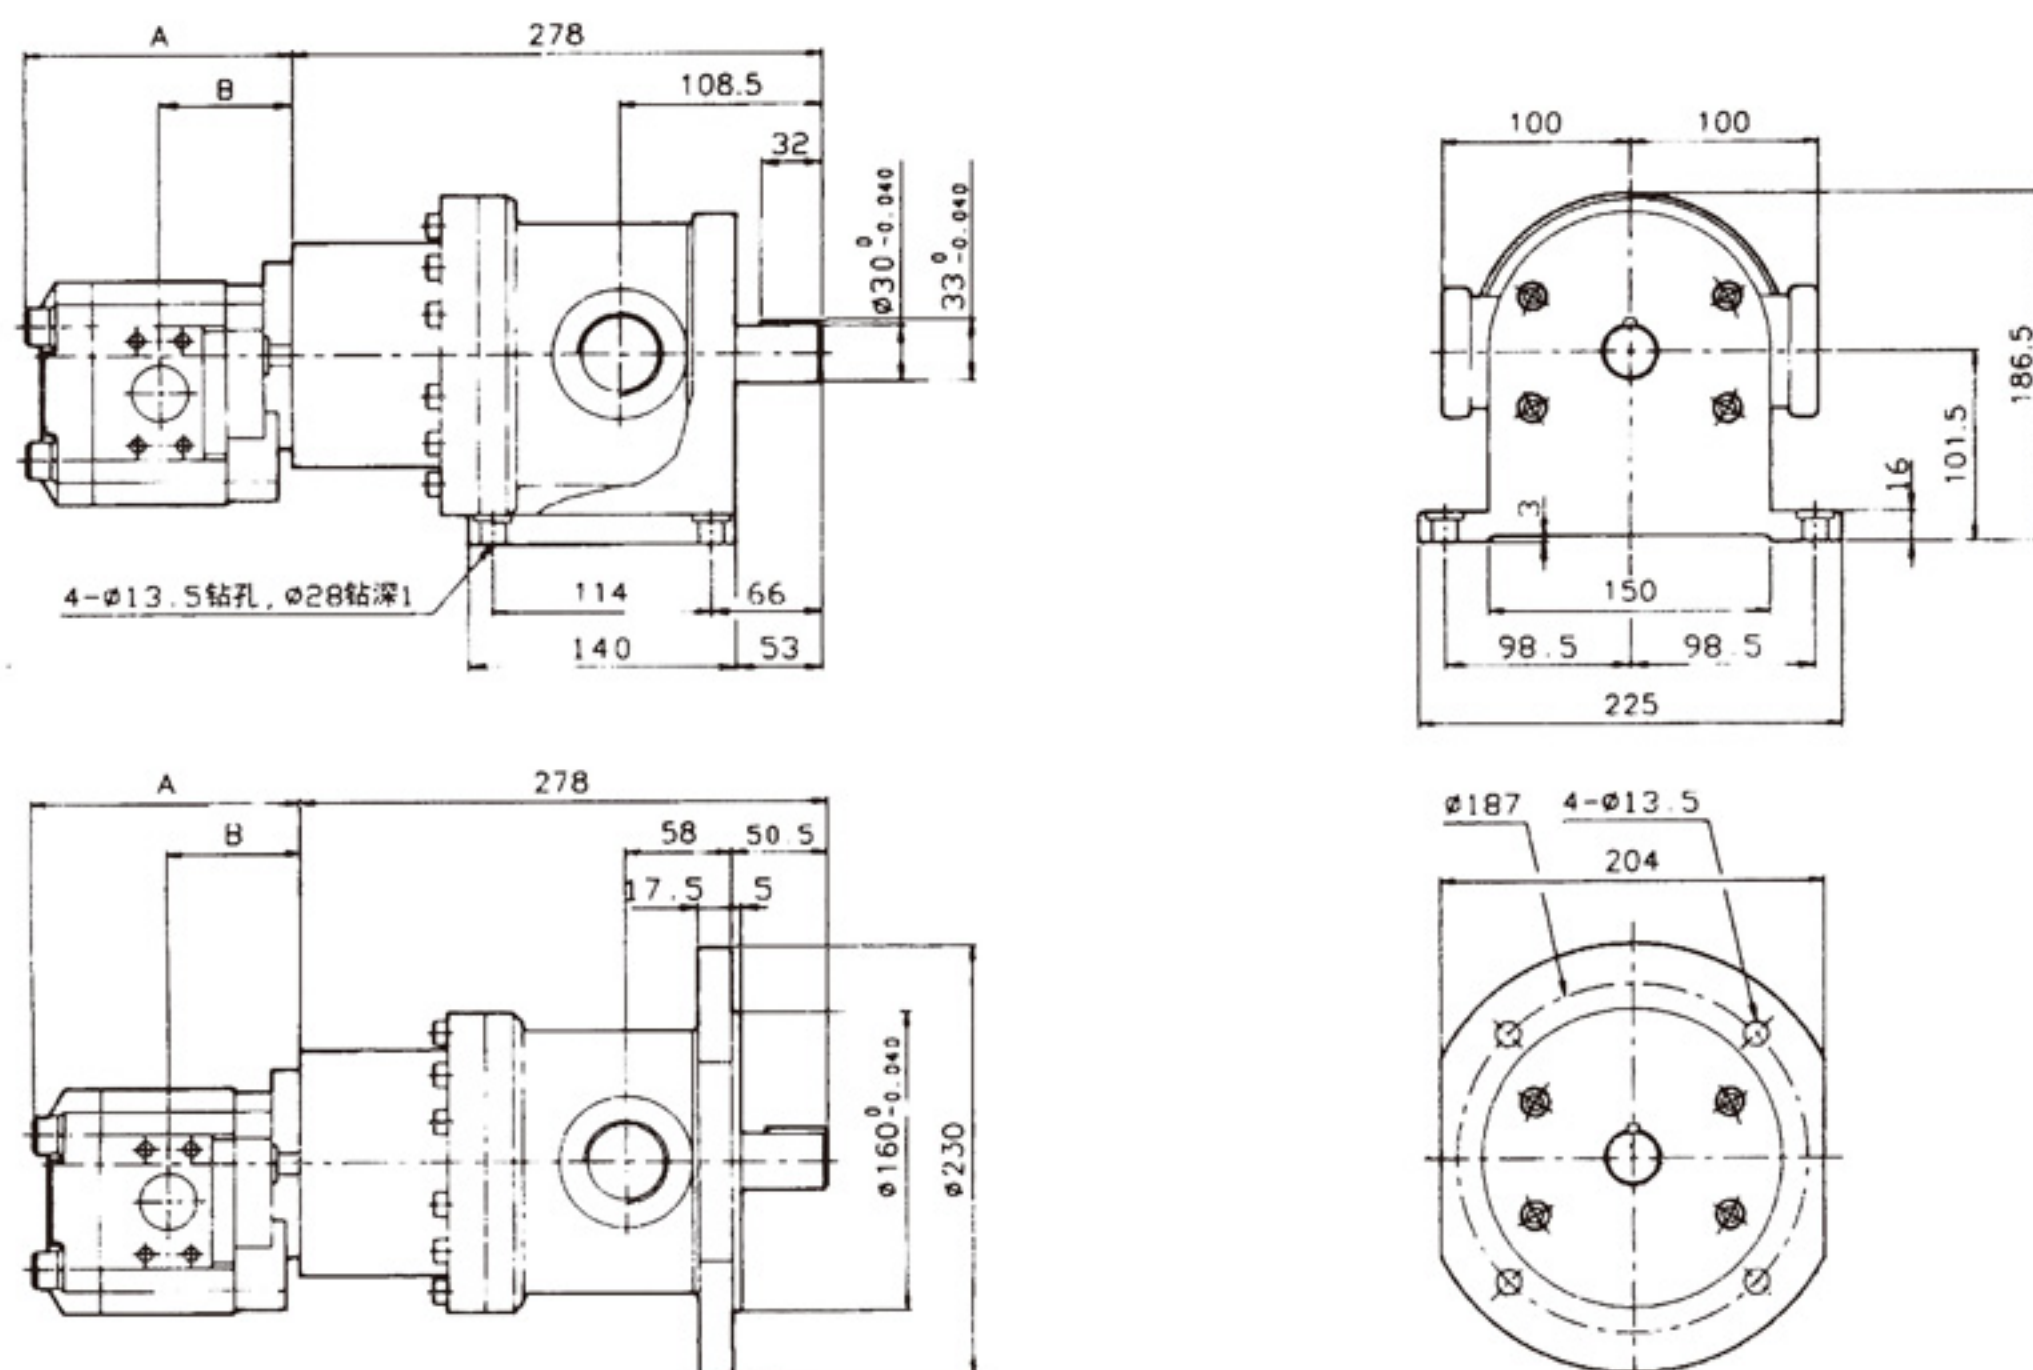

特點:

共用同一心軸，同一馬達而構成高低壓泵。
嘈音小，流量大，低成本，高容積效率設計。

FEATURES:

Employed same shaft & motor and formed a hi-low pressure pump set.
Low noise level, large flow rate, low cost & hi-volumetric efficiency design.

訂購索引/ORDERING INDEX:


※	T	-	※-※	※	※	-	R1	
								蓋端輪葉泵浦 Cover end vane pump
								PV2R1 : 6, 8, 10, 12, 14, 17, 19, 23, 25, 31
								c. c/rev.
								吐出位置 Discharge portion
								(正視泵浦軸端 View from shaft end)
								R: 右邊 Right hand L: 左邊 Left hand (規格品 Normal)
								回轉方向 Rotating direction
								R: 正轉 CW L: 逆轉 CCW
								安裝方式 Mounting style
								F: Flange mounting (法蘭式)
								L: Lug mounting (腳座式)
								軸端輪葉泵浦 Shaft end vane pump
								50T : 12, 14, 17, 19, 23, 26, 30, 36, 42
								c. c. /rev. 150T : 48, 61, 75, 94, 116
								(C. C/rev.)
								接續方式 Connecting type
								T: Piping type (接管式) F: flange type (法蘭式)
								系列號碼 Serial no.

規格/SPECIFICATIONS:



型式 Model	吐出能力 Delivery capacity				最大壓力 Max. pressure(kgf/cm ²)	額定速度 Rated speed	
	回轉速度(rpm)Running speed					最高 Max.	最低 Min.
	1000	1200	1500	1800			
150T-48	48.3	57.96	72.4	86.9	90	1800	900
150T-61	61.5	73.8	92.2	110.7	90	1800	900
150T-75	75.5	90.6	113.2	135.9	90	1500	900
150T-94	94.2	113.0	141.3	169	70	1500	900
150T-116	116.3	139.6	174	—	70	1200	900
PV2R1-6	6.2	7.4	9.3	11.2	210	1800	1200
PV2R1-8	8.1	9.7	12.1	14.6	245	1800	950
PV2R1-10	10.1	12.1	15.1	18.9	245	1800	950
PV2R1-12	12.2	14.6	18.3	21.9	245	1800	950
PV2R1-14	14.3	17.1	21.5	25.7	245	1800	950
PV2R1-17	17.1	20.5	25.6	30.7	245	1800	950
PV2R1-19	19.2	23.0	28.8	34.5	245	1800	950
PV2R1-23	23.3	27.9	34.9	41.9	245	1800	950
PV2R1-25	26.1	31.3	39.1	46.9	245	1800	950
PV2R1-31	31.1	37.3	46.6	55.8	245	1500	950

尺寸圖/DIMENSIONS:

50T + PV2R1

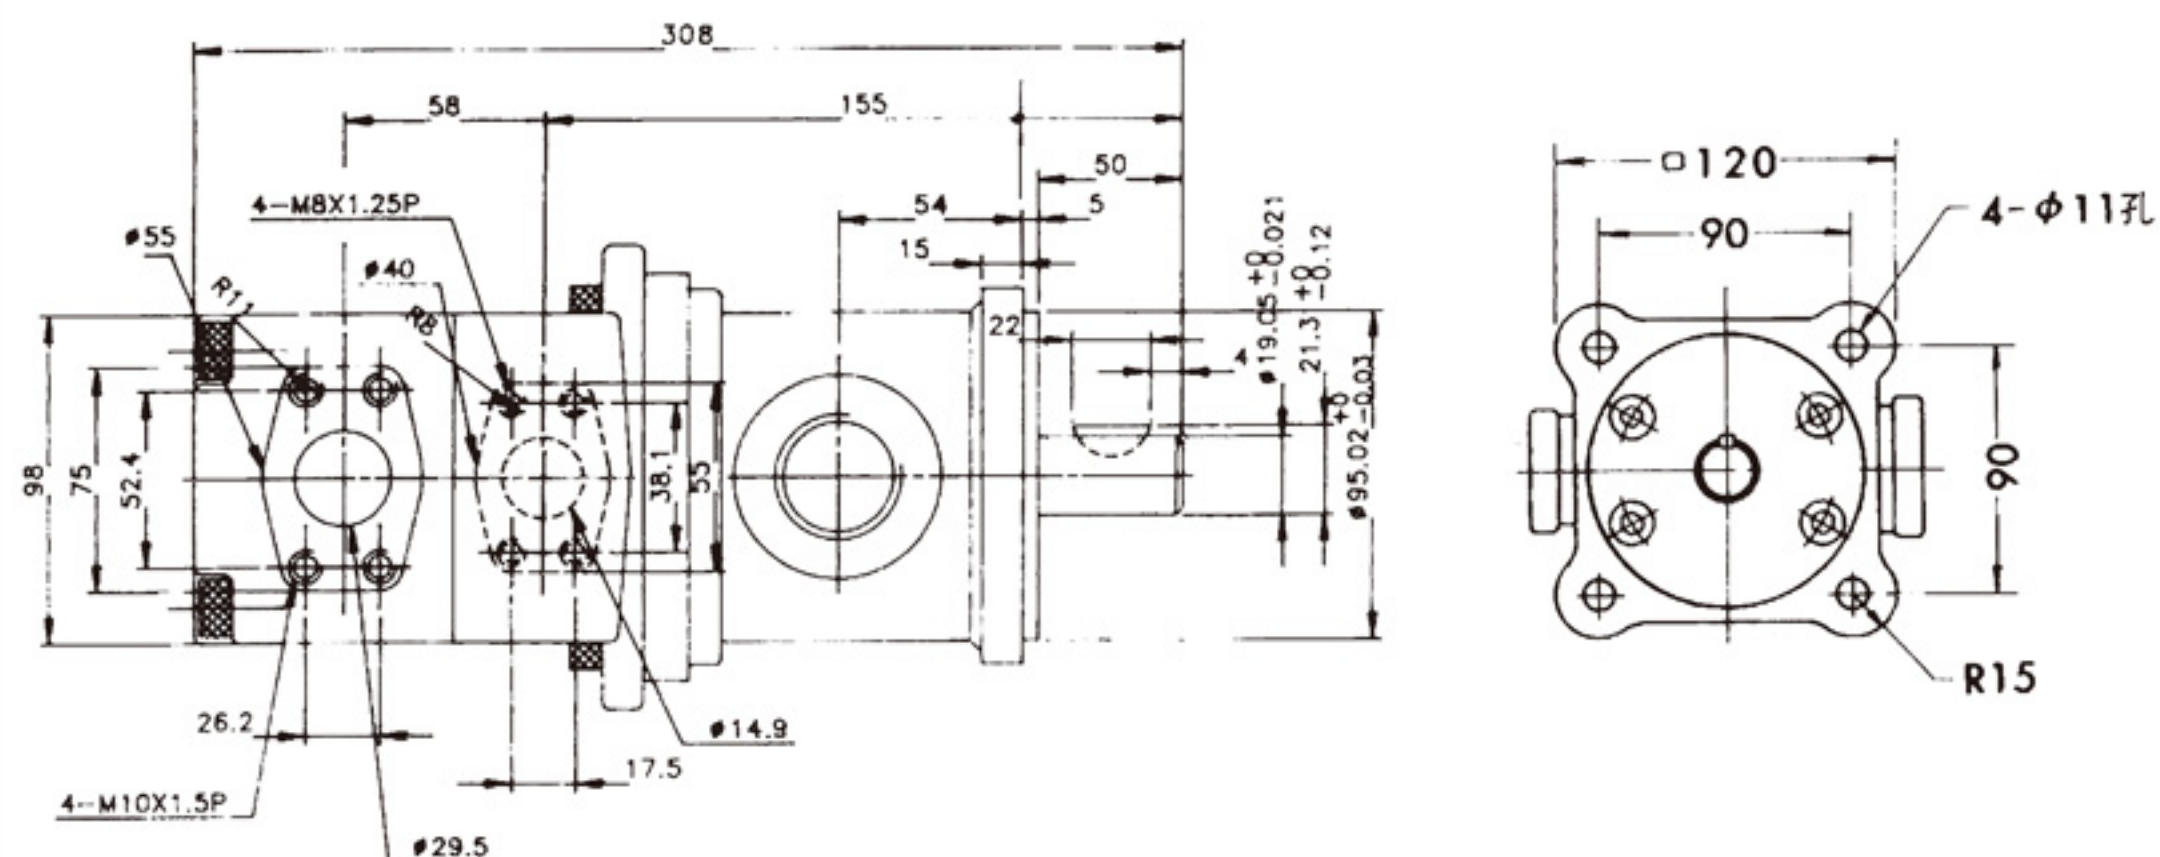

150T + PV2R1

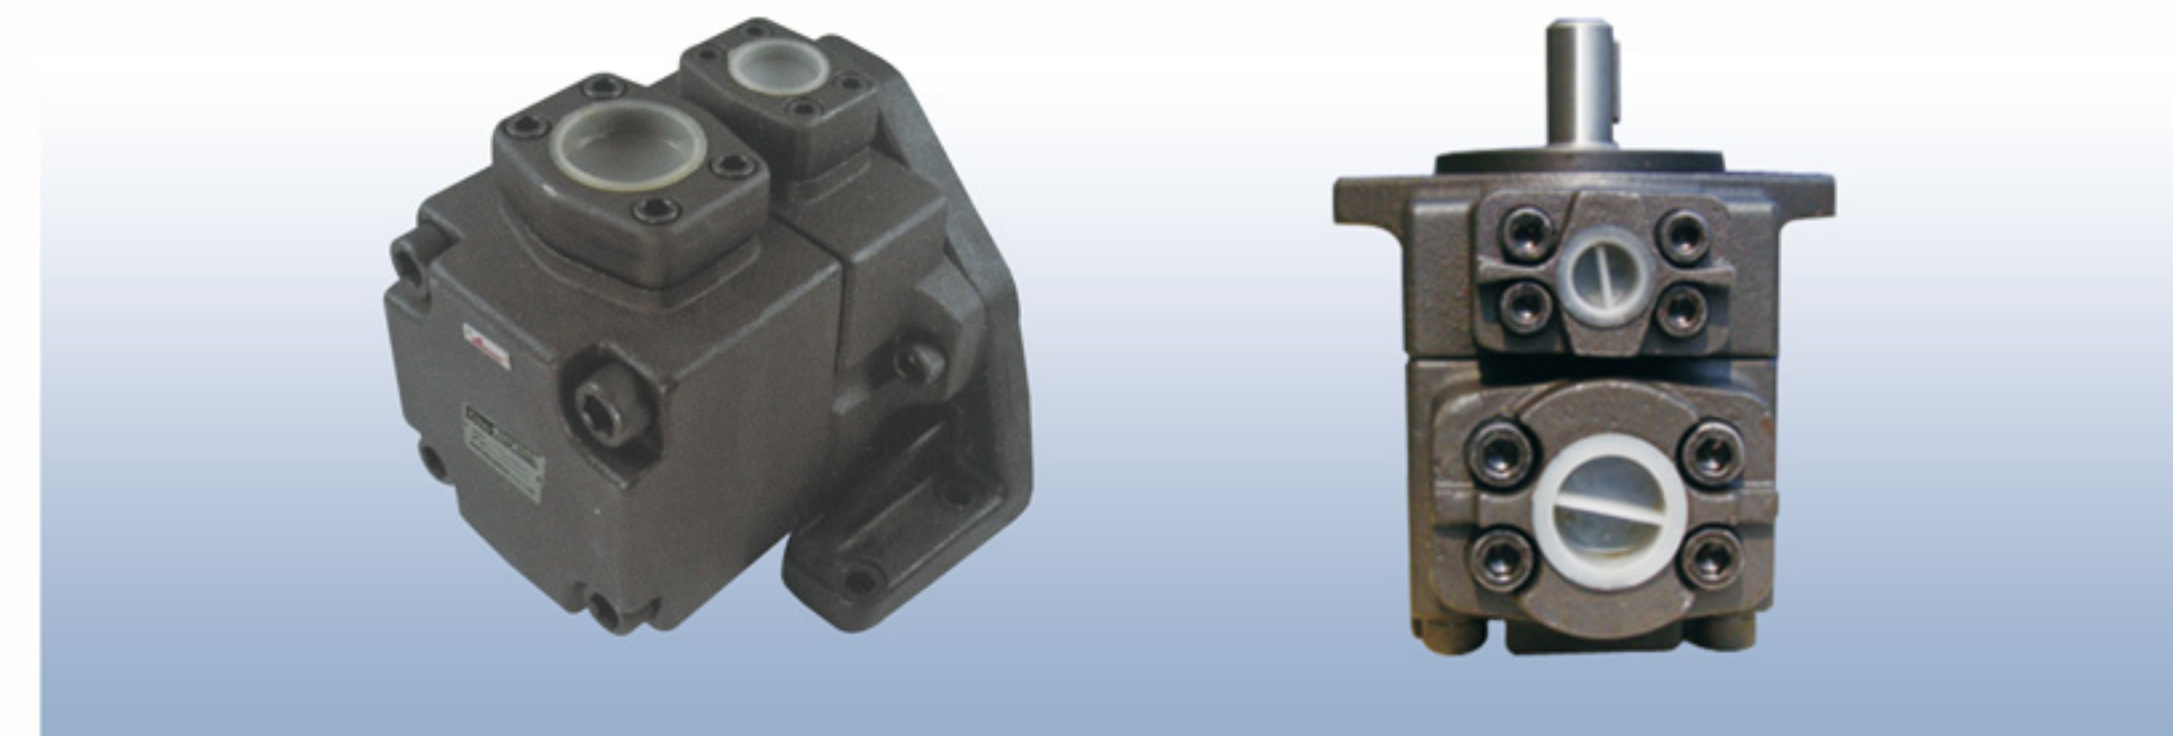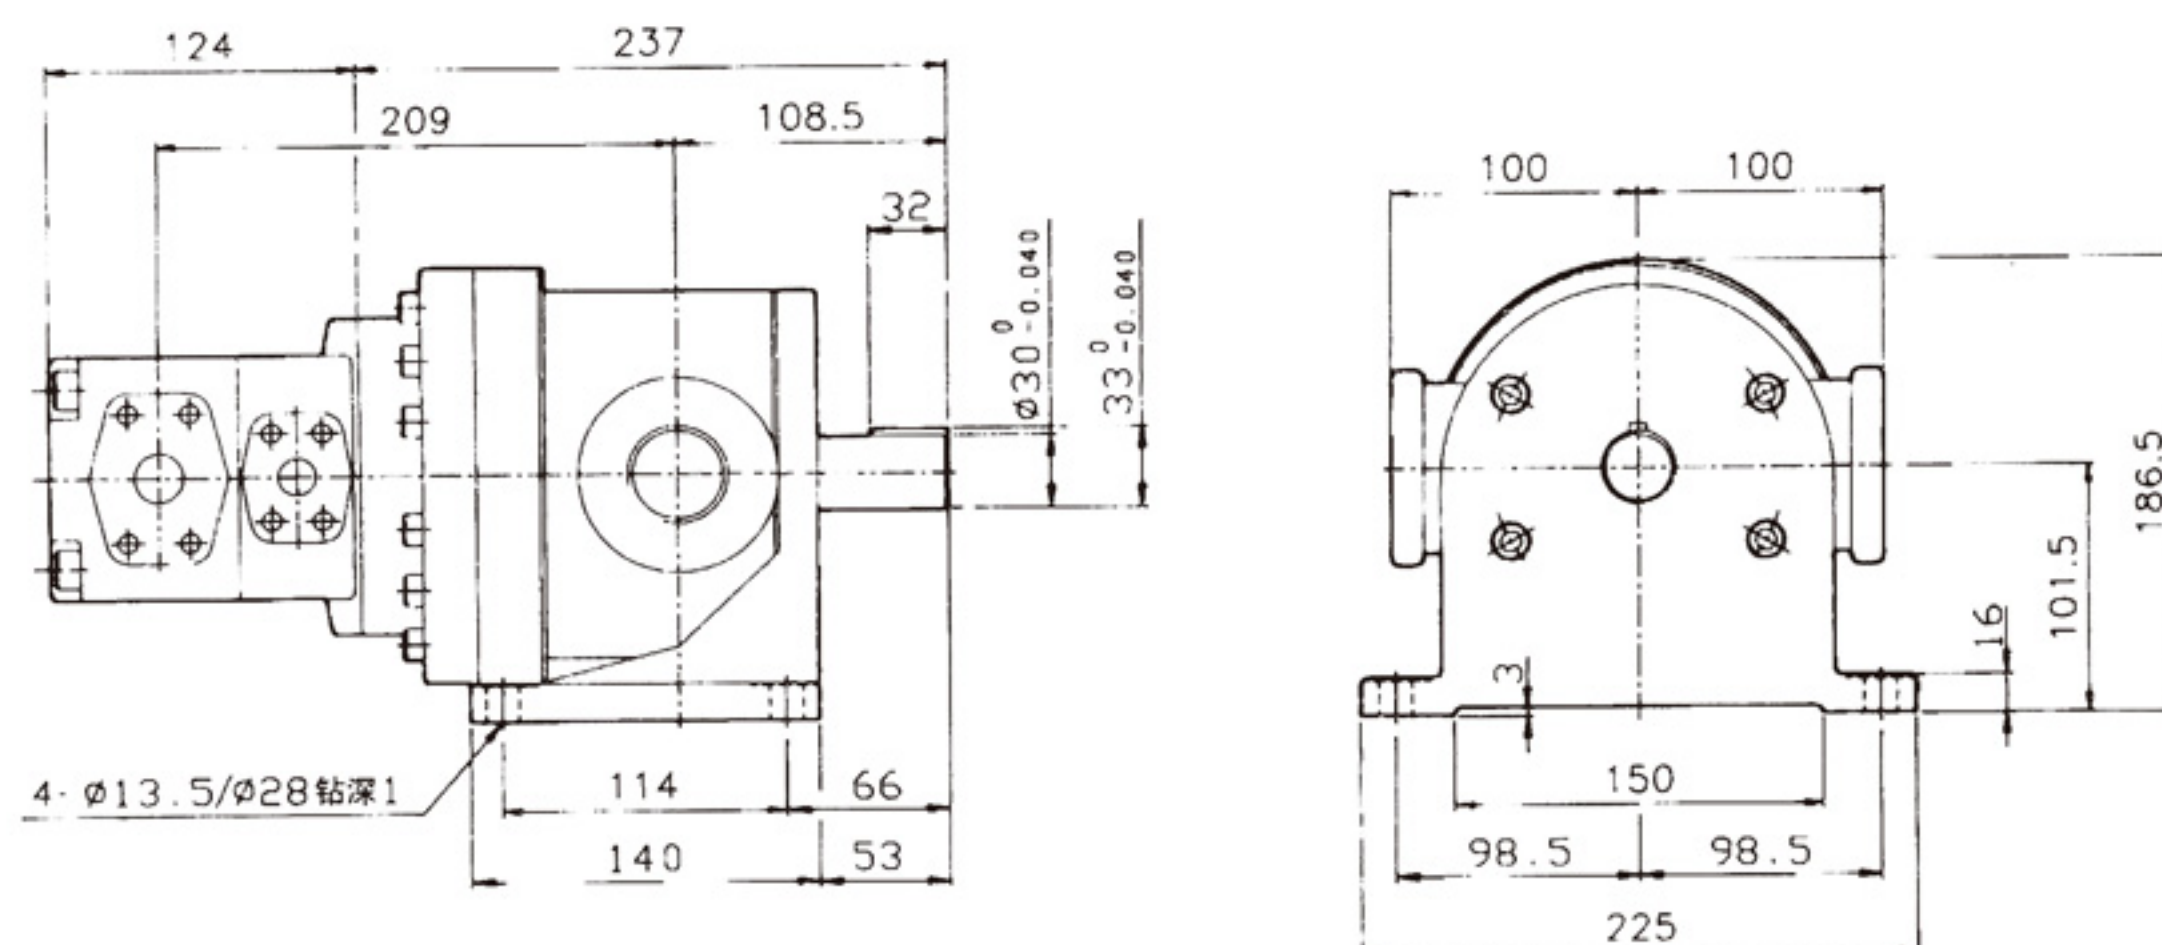

訂購索引/ORDERING INDEX:


PV2R1	-	※	-	※	-	※	※	※
								吸入位置Suction portion (正視泵浦軸端View from shaft end) A: 向上Upward (規格品normal) B: 向下Downward R: 右邊Right side L: 左邊Left side
								吐出位置Discharge portion (正視泵浦軸端View from shaft end) A: 向上Upward (規格品normal) B: 向下Downward R: 右邊Right side L: 左邊Left side
								回轉方向Rotating direction R: 正轉CW L: 逆轉CCW
								安裝方式Mounting style F: Flange mounting (法蘭式) L: Lug mounting (腳座式)
								正常吐出能力Normal delivery cap. PV2R1 : 6, 8, 10, 12, 14, 17, 19, 23, 26, 31 c. c/rev. PV2R2 : 26, 33, 38, 41, 47, 53, 59, 65 c. c/rev. PV2R3 : 60, 66, 76, 82, 88, 94, 108, 116, 126 c. c/rev.
								系列號碼Serial no.

規格/SPECIFICATIONS:

型式 Model	吐出能力 Delivery capacity				最大壓力 Max. pressure(kgf/cm ²)	額定速度 Rated speed	
	回轉速度(rpm)Running speed					最高 Max.	最低 Min.
	1000	1200	1500	1800			
PV2R1-06	6.2	7.4	9.3	11.2	210	1800	1200
PV2R1-08	8.1	9.4	12.1	14.6	210	1800	950
PV2R1-10	10.1	12.1	15.1	18.9	245	1800	950
PV2R1-12	12.2	14.6	18.3	21.9	245	1800	950
PV2R1-14	13.6	17.1	21.5	25.7	245	1800	950
PV2R1-17	16.6	20.5	25.6	0.7	245	1800	950
PV2R1-19	18.6	23.0	28.8	34.5	245	1800	950
PV2R1-23	22.7	27.9	34.9	41.9	245	1800	950
PV2R1-25	25.3	31.3	39.1	46.9	245	1800	950
PV2R1-31	31.0	37.3	46.6	----	245	1500	950
PV2R2-26	26.2	31.4	39.3	47.1	245	1800	950
PV2R2-33	33.0	38.5	48.1	57.7	245	1800	950
PV2R2-38	38.2	45.8	57.3	68.7	245	1800	950
PV2R2-41	41.3	49.2	61.5	73.8	210	1800	950
PV2R2-47	47.2	57.8	71.4	86.7	245	1800	950
PV2R2-53	53.1	63.7	79.6	95.5	245	1800	950
PV2R2-59	60.2	72.7	90.3	108.3	210	1800	950
PV2R2-65	65.3	78.3	97.9	117.5	210	1800	950
PV2R3-60	60.3	72.3	90.4	108.5	210	1800	900
PV2R3-66	66.4	79.6	99.6	119.5	210	1800	900
PV2R3-76	76.3	91.5	114.4	137.3	210	1800	900
PV2R3-82	82.2	98.6	123.3	147.5	210	1800	900
PV2R3-88	88.3	105.9	132.4	158.9	210	1800	900
PV2R3-94	93.6	113.4	141.7	170.1	210	1800	900
PV2R3-108	108.2	129.8	162.3	194.4	210	1800	900
PV2R3-116	115.6	139.3	174.1	208.9	175	1800	900
PV2R3-126	125.6	149.5	186.9	226	175	1500	900


尺寸圖/DIMENSIONS:

PV2R1

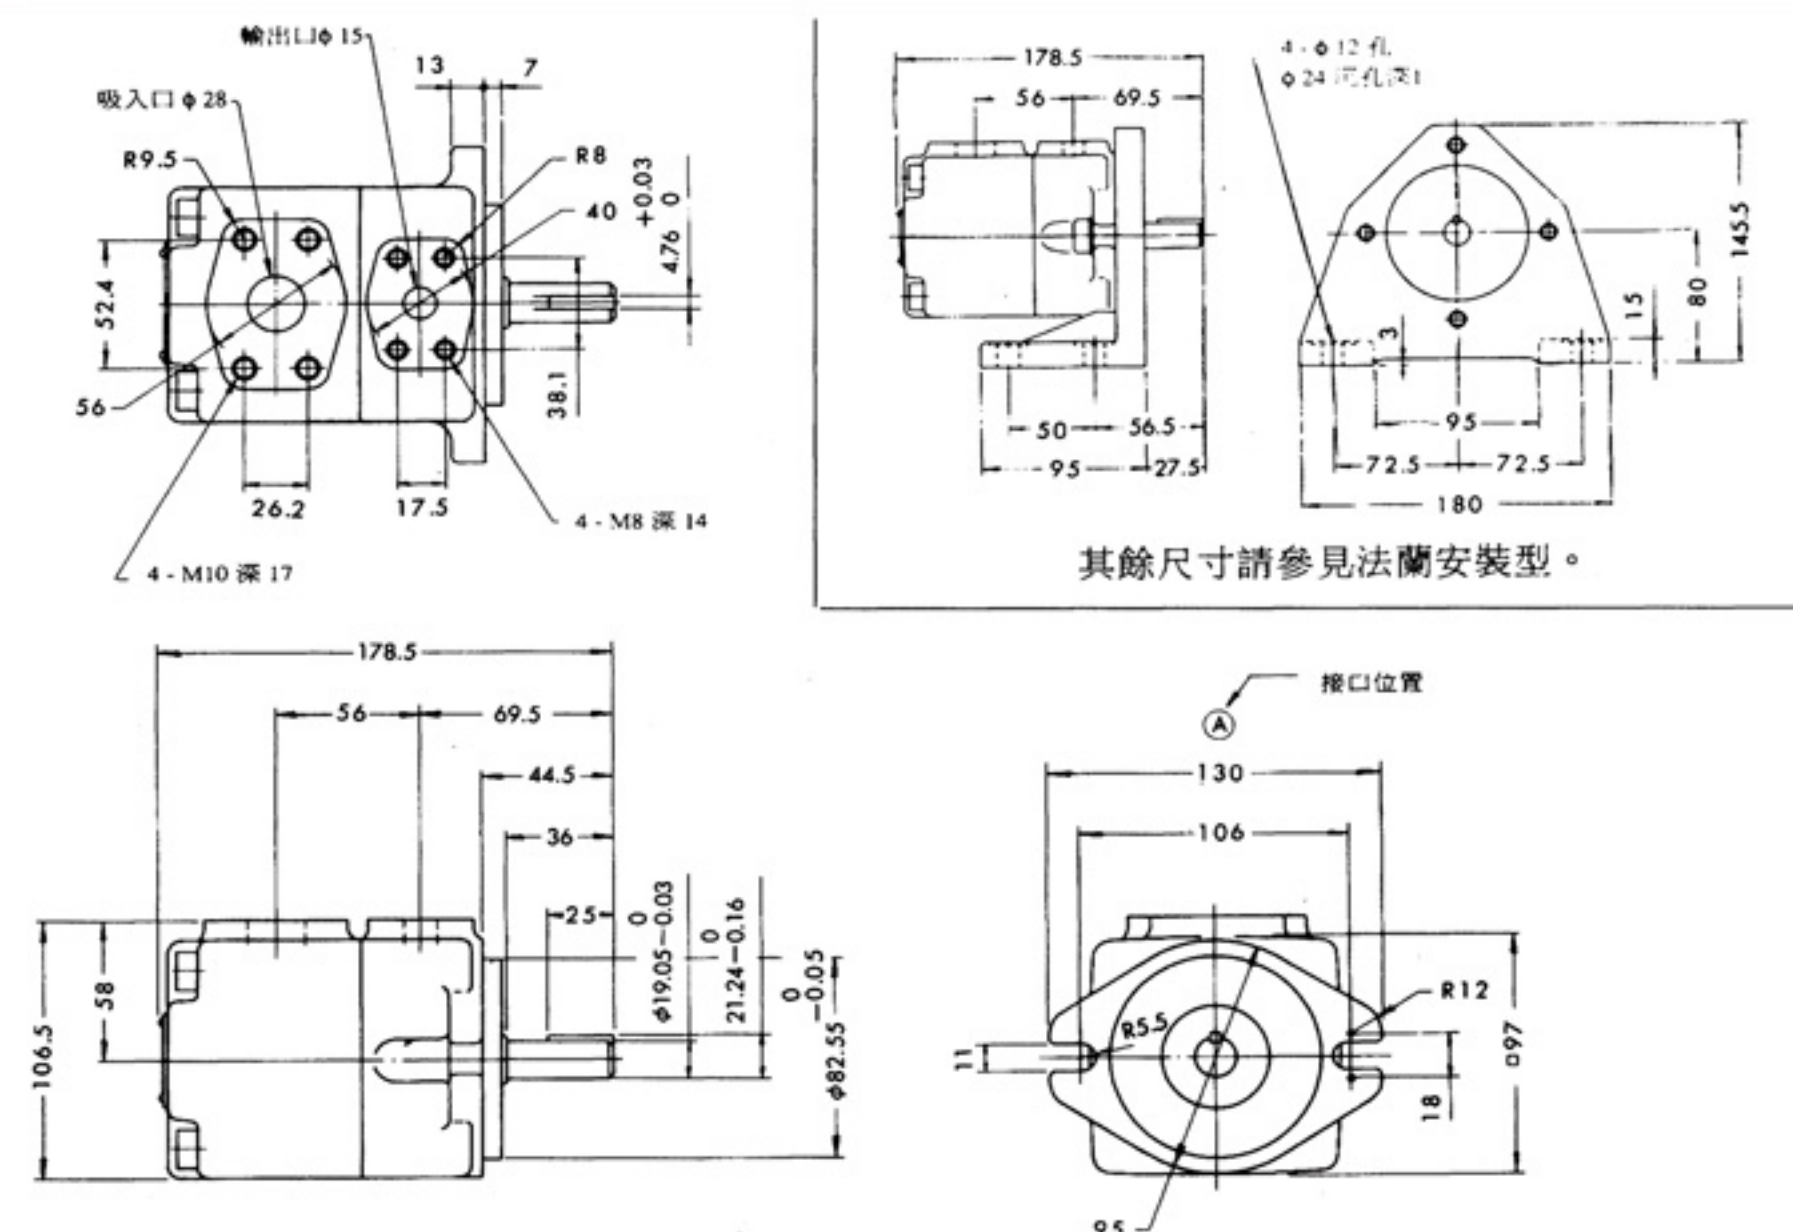


尺寸圖/DIMENSIONS:

PV2R2

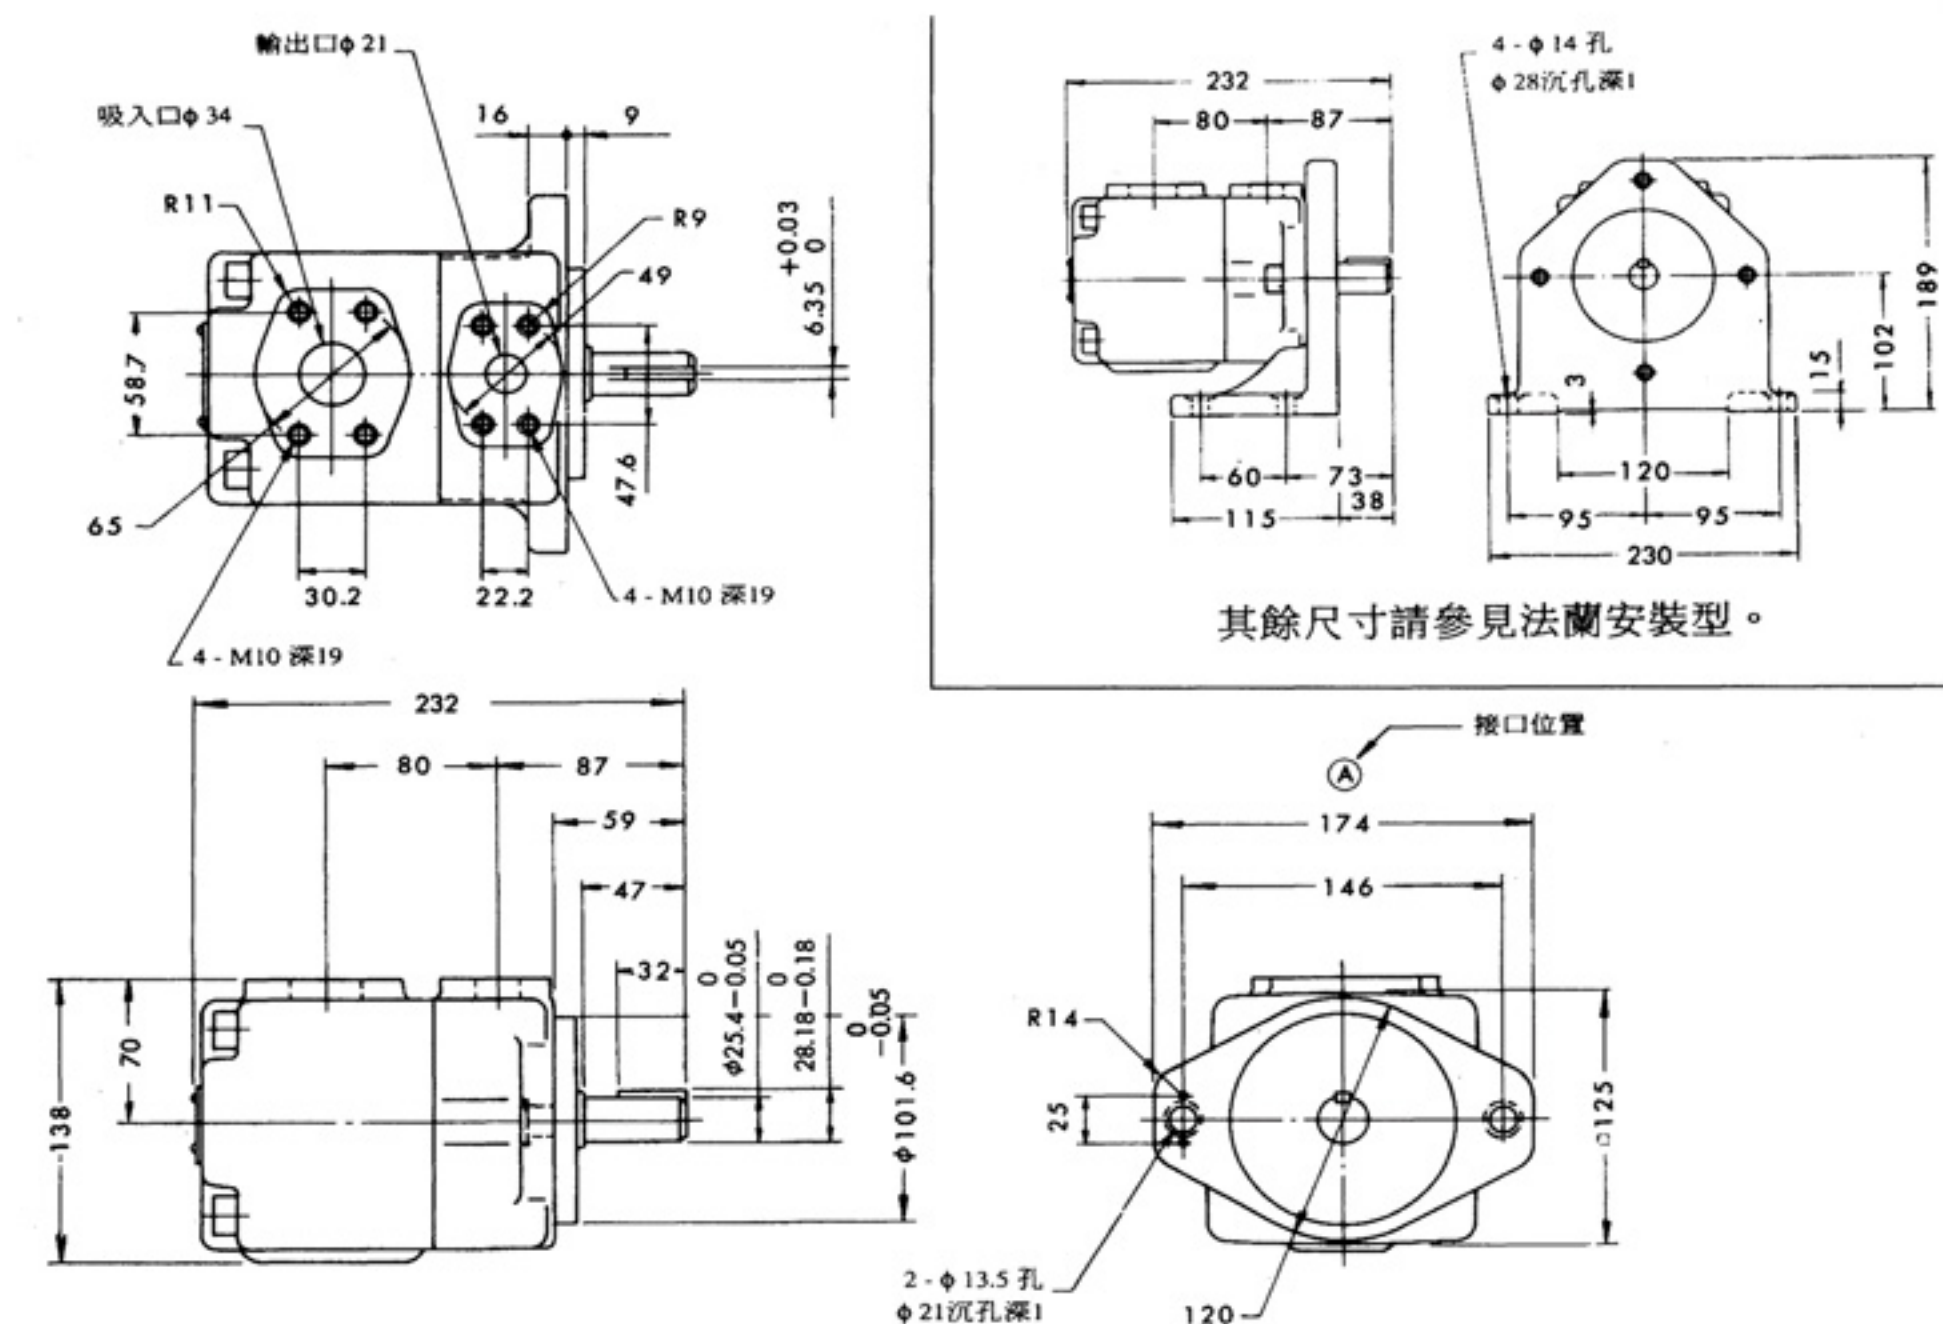

PV2R3

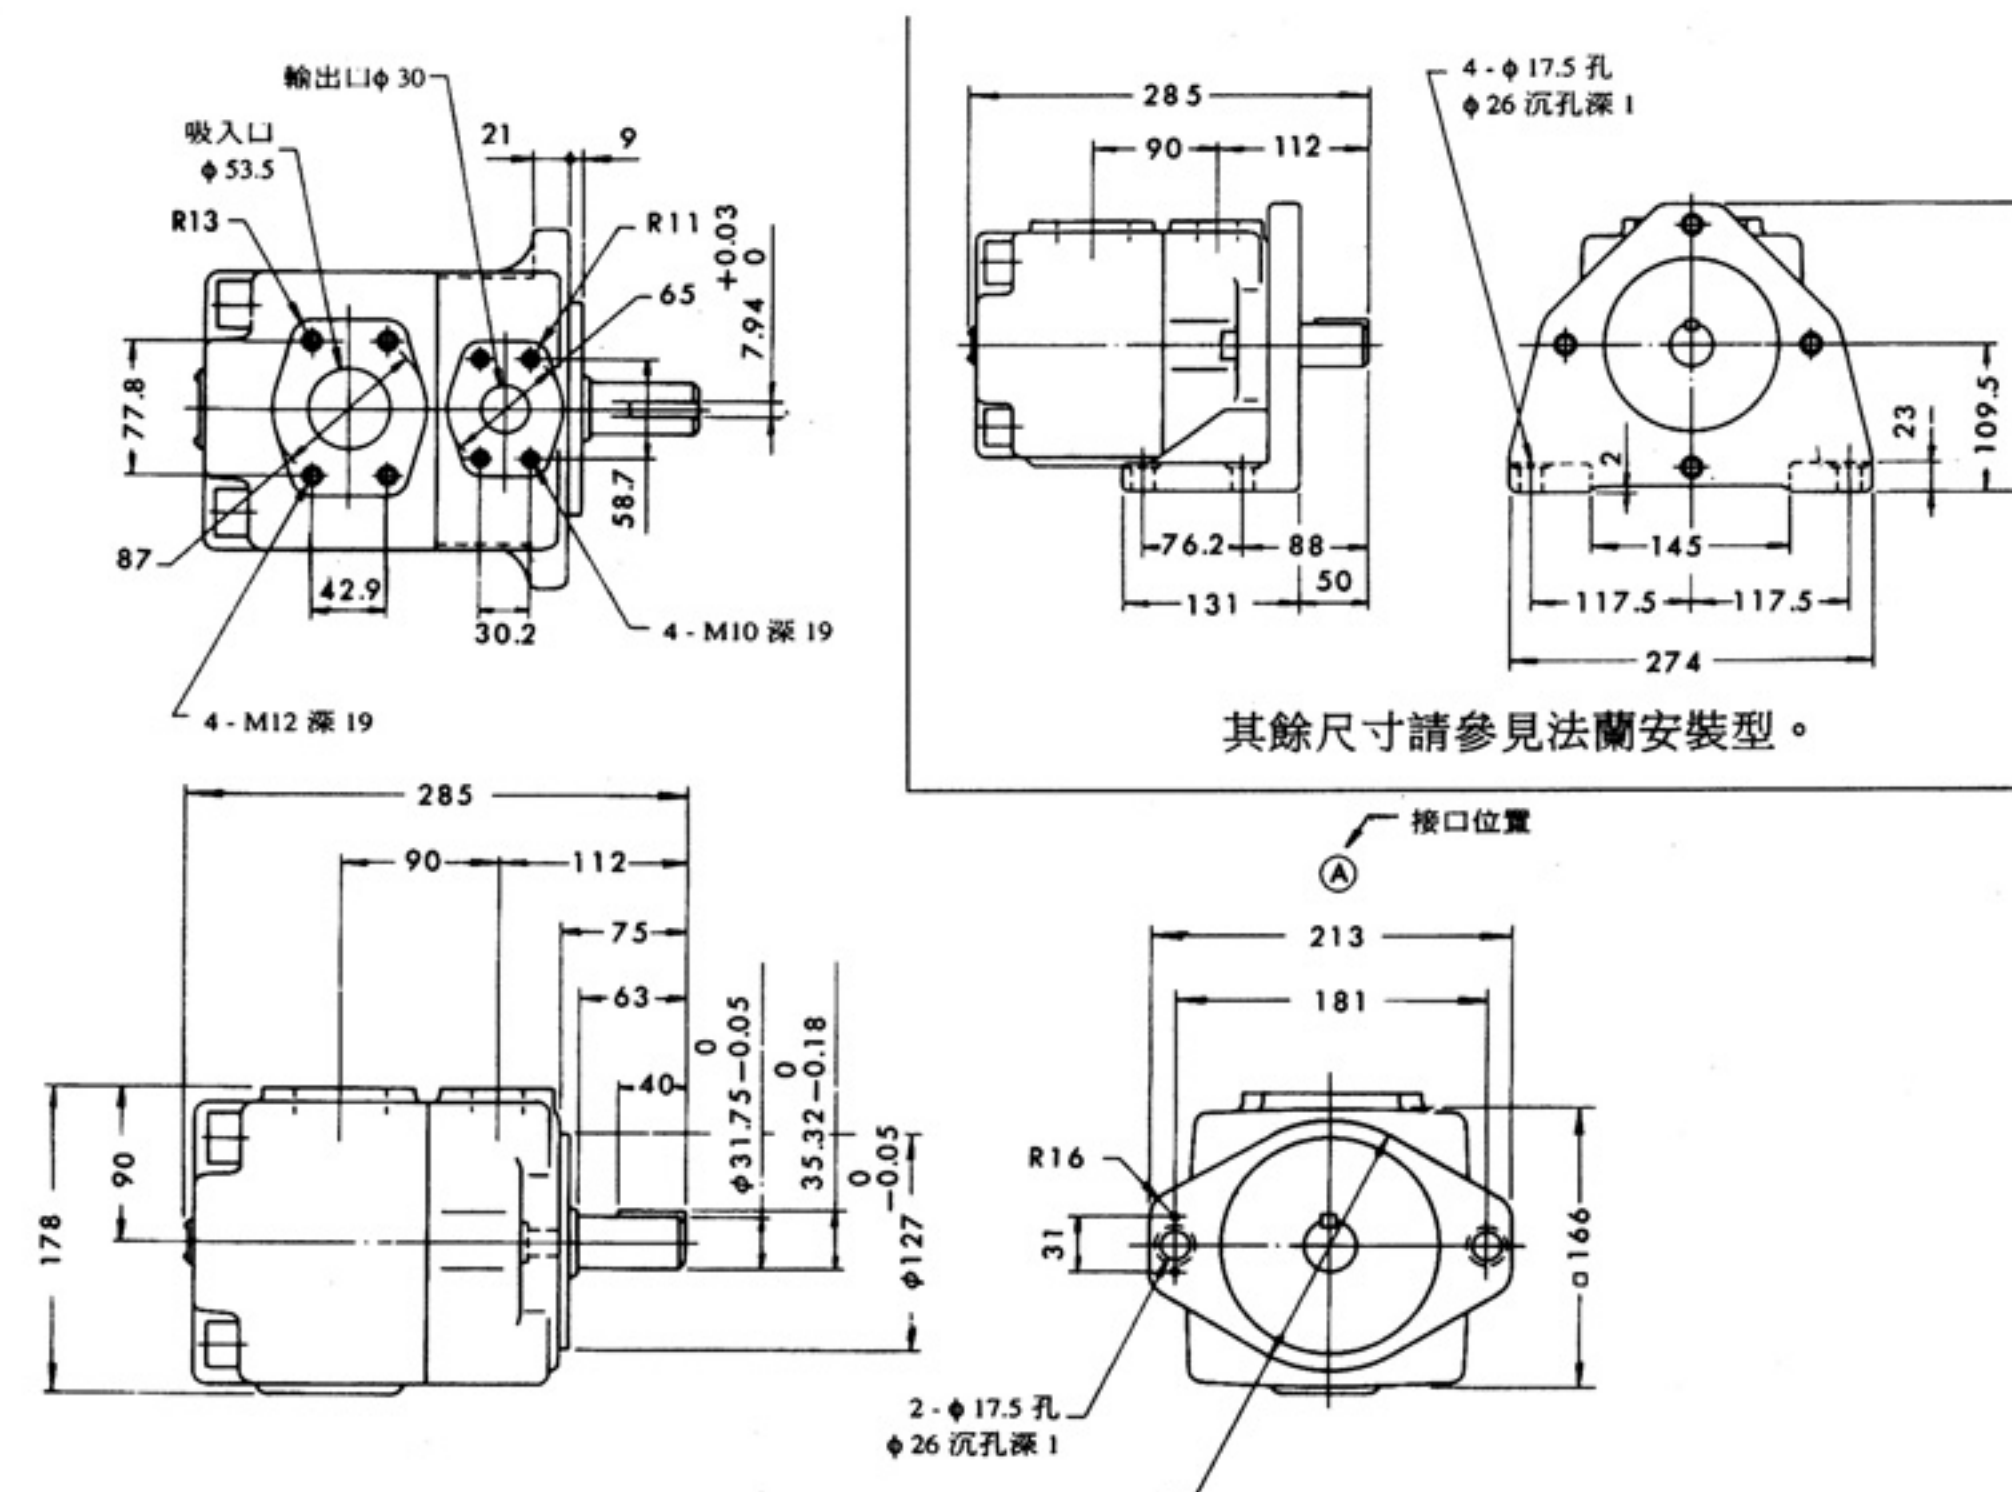





規格/SPECIFICATIONS:

型式 Model	吐出能力 Delivery capacity				最大壓力 Max. pressure (kgf/cm ²)	額定速度 Rated speed	
	回轉速度(rpm)Running speed					最高 Max.	最低 Min.
	1000	1200	1500	1800			
PV2R1-06	6.2	7.4	9.3	11.2	210	1800	1200
PV2R1-08	8.1	9.7	12.1	14.6	210	1800	950
PV2R1-10	10.1	12.1	15.1	18.9	245	1800	950
PV2R1-12	12.2	14.6	18.3	21.9	245	1800	950
PV2R1-14	13.6	17.1	21.5	25.7	245	1800	950
PV2R1-17	16.6	20.5	25.6	30.7	245	1800	950
PV2R1-19	18.6	23.0	28.8	34.5	245	1800	950
PV2R1-23	22.7	27.9	34.9	41.9	245	1800	950
PV2R1-25	25.3	31.3	39.1	46.9	245	1800	950
PV2R1-31	31.0	37.3	46.6	----	245	1500	950
PV2R2-26	26.2	31.4	39.3	47.1	245	1800	950
PV2R2-33	33.0	38.5	48.1	57.7	245	1800	950
PV2R2-38	38.2	45.8	57.3	68.7	245	1800	950
PV2R2-41	41.3	49.2	61.5	73.8	210		
PV2R2-47	47.2	57.8	71.4	86.7	245	1800	950
PV2R2-53	53.1	63.7	79.6	95.5	245	1800	950
PV2R2-59	60.2	72.7	90.3	108.3	210	1800	950
PV2R2-65	65.3	78.3	97.9	117.5	210	1800	950


訂購索引/ORDERING INDEX:

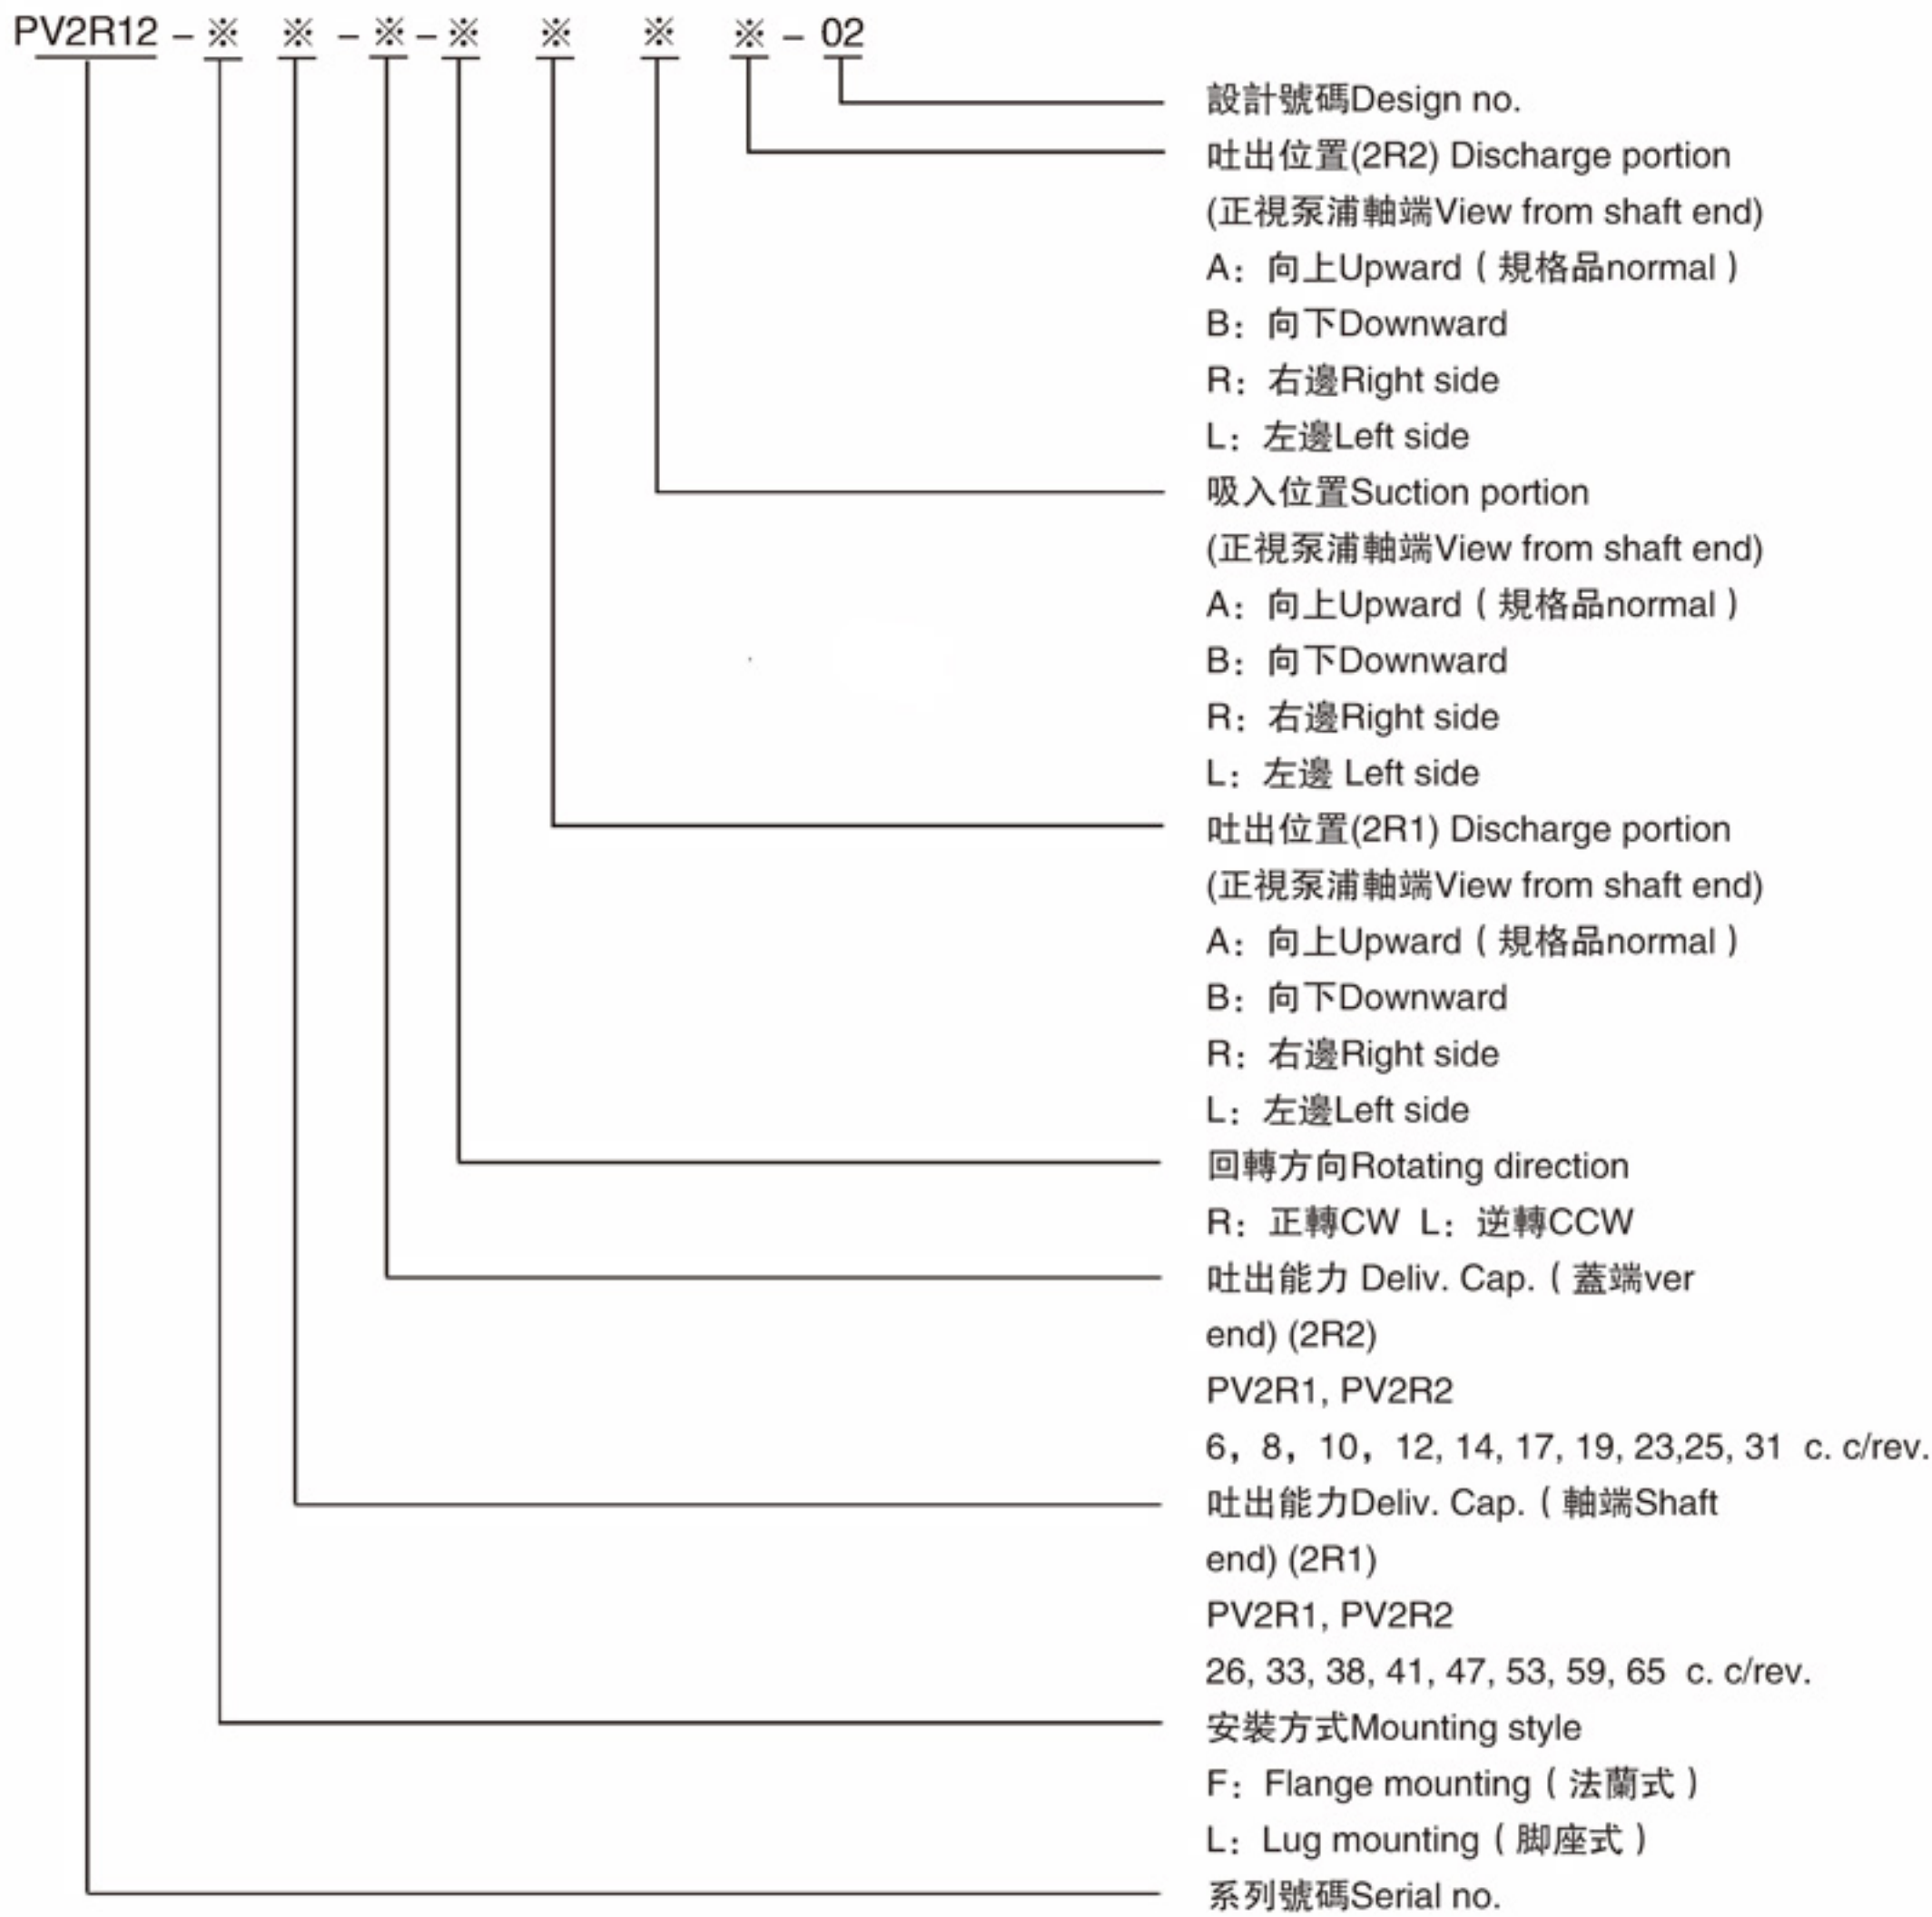

尺寸圖/DIMENSIONS:

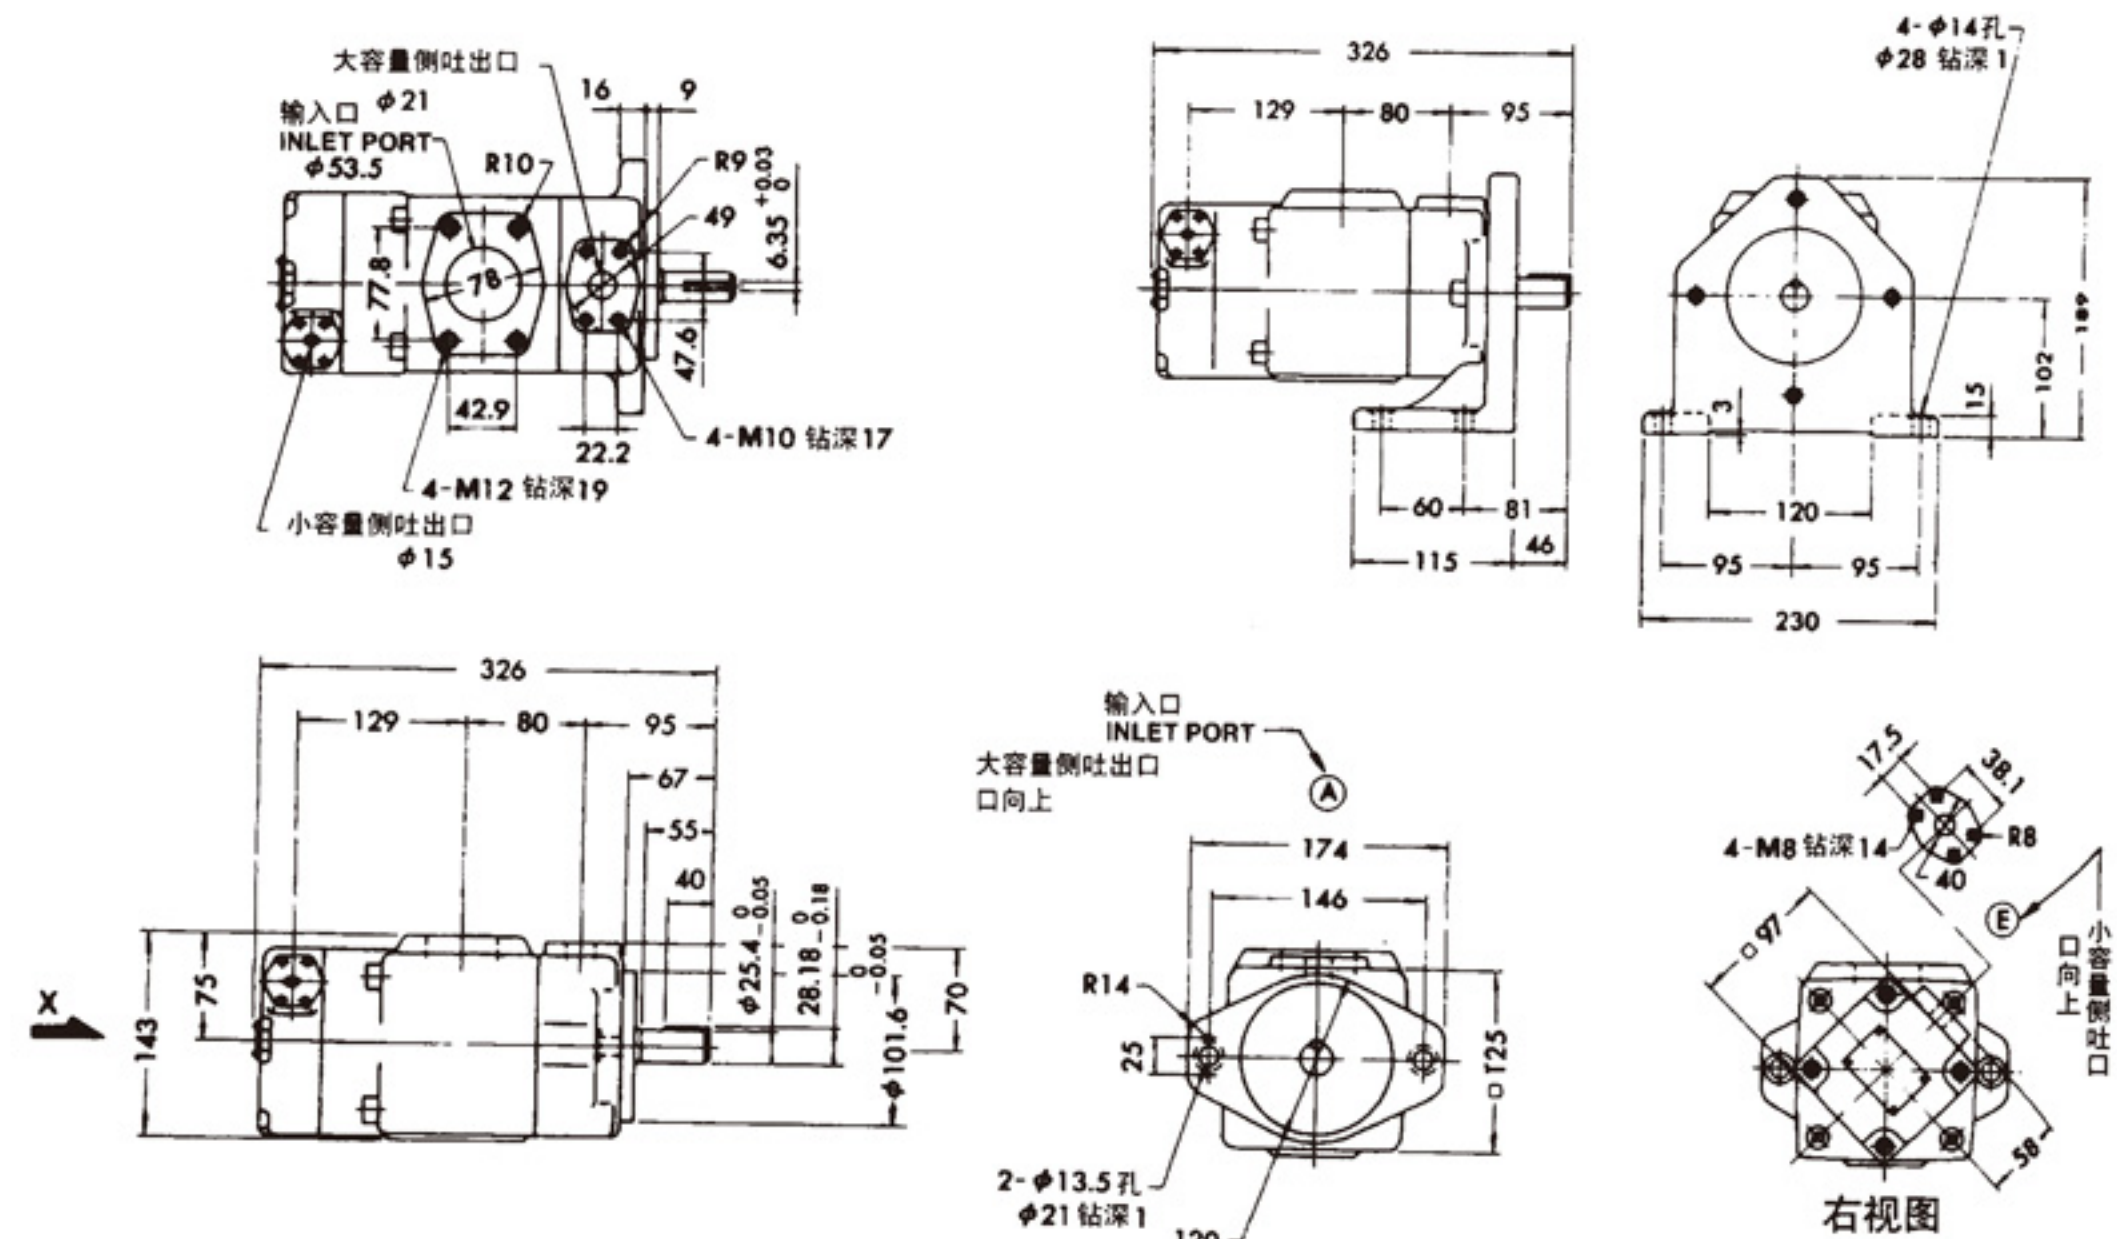

產品圖例

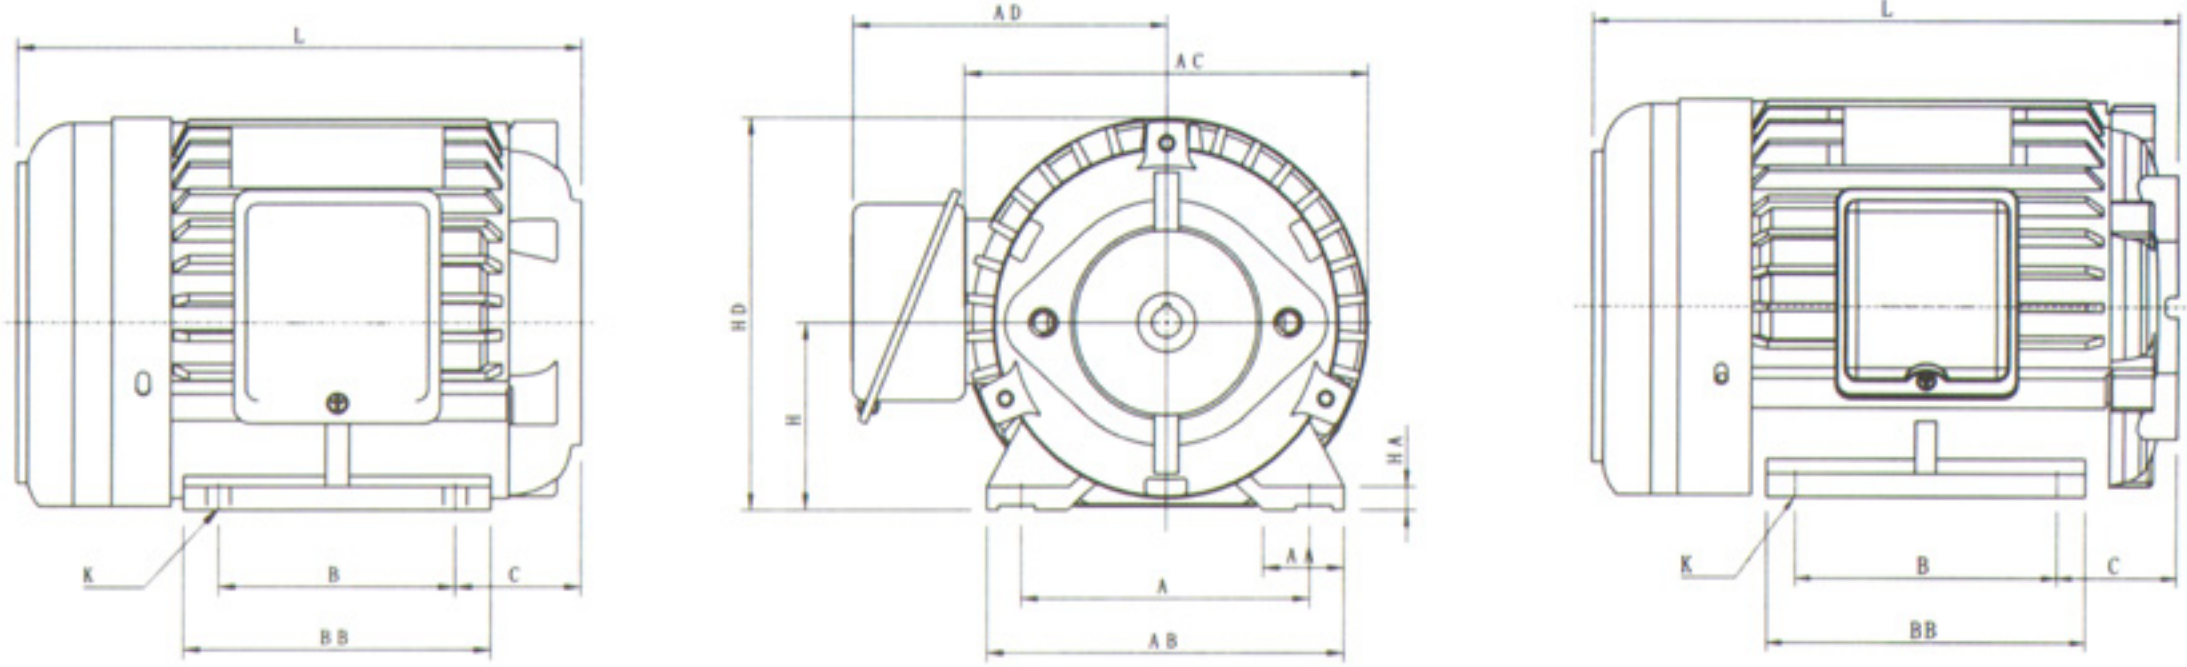


圖一

圖二

4P	6P	框號	相數	圖號	A	AA	AB	AC	AD
1/2	1/4	80	三	圖一	125	35	155	175	138
1	1/2	80	三		125	35	155	175	138
2	1	90L	三		140	40	175	196	147
3	2	100L	三	圖二	160	40	196	219	162
5	3	112M	三		190	40	228	235	164
7 1/2	5	132S	三		216	45	250	268	191
10	7 1/2	132M	三		216	45	250	268	191
15	10	160M	三	圖三	254	50	300	318	253
20	15	160L	三		254	50	300	318	253
25 30	20	180MC	三		279	85	356	354	303
40	25 30	180LC	三		279	85	356	354	303
1/2	-	80	單	圖一	125	35	155	175	138
1	-	90L	單		140	40	175	196	155
2	-	90L	單		140	40	175	196	155
3	-	112M	單	圖一	190	45	228	228	174
5	-	112M	單		190	45	224	245	185

注：心軸內徑尺寸請參照幫浦形式規格表。
采用銑鐵外殼。
以上數值若有變更，恕不另行通知。


立式油壓專用馬達 HSL

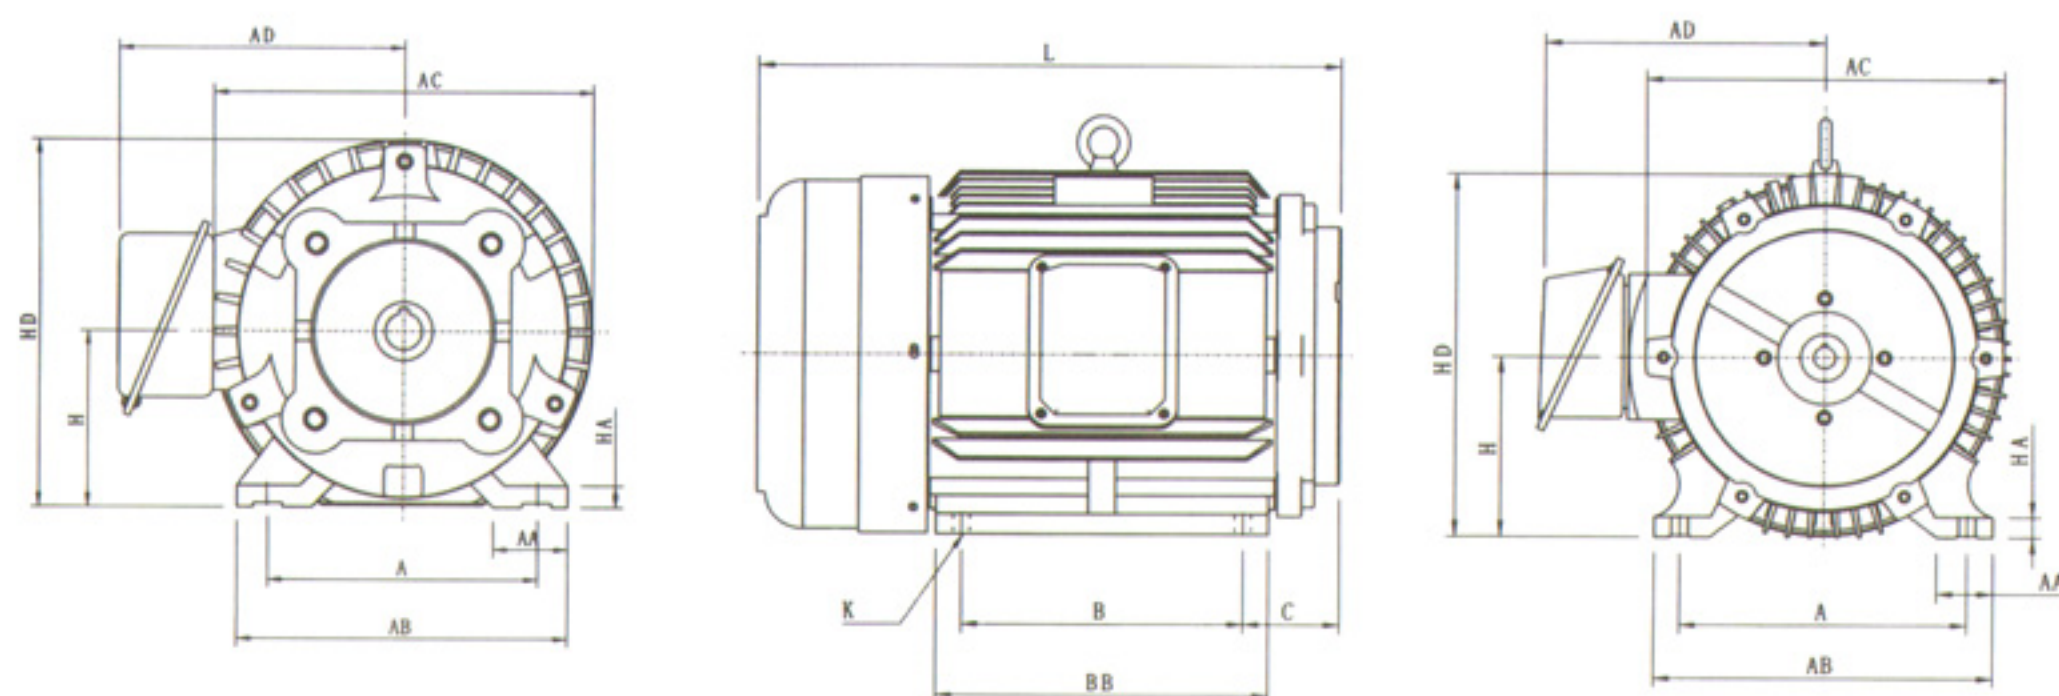

圖三

單位: mm


B	BB	C	H	HA	HD	K	L	淨重(kg)
100	130	51	80	10	170	10	230	13
100	130	53.5	80	10	170	10	235	15.5
125	156	52	90	11	190	12	270	23.5
140	177	65	100	12	210	12	303	31.5
140	172	57.5	112	13	230	12	290	38.5
140	175	77	132	16	266	12	345	60
178	213	75	132	16	266	12	378	70
210	250	87	160	18	320	14	479	115
254	300	87	160	18	320	14	523	140
241	300	105	180	24	360	15	547	180/220
279	330	105	180	24	360	15	585	240
100	130	53.5	80	10	170	10	265	15
125	157	52	90	12	190	10	290	24
125	157	64	100	12	190	10	300	28
140	175	73.5	112	12	230	12	385	42.5
140	175	95	112	14	230	12	420	48

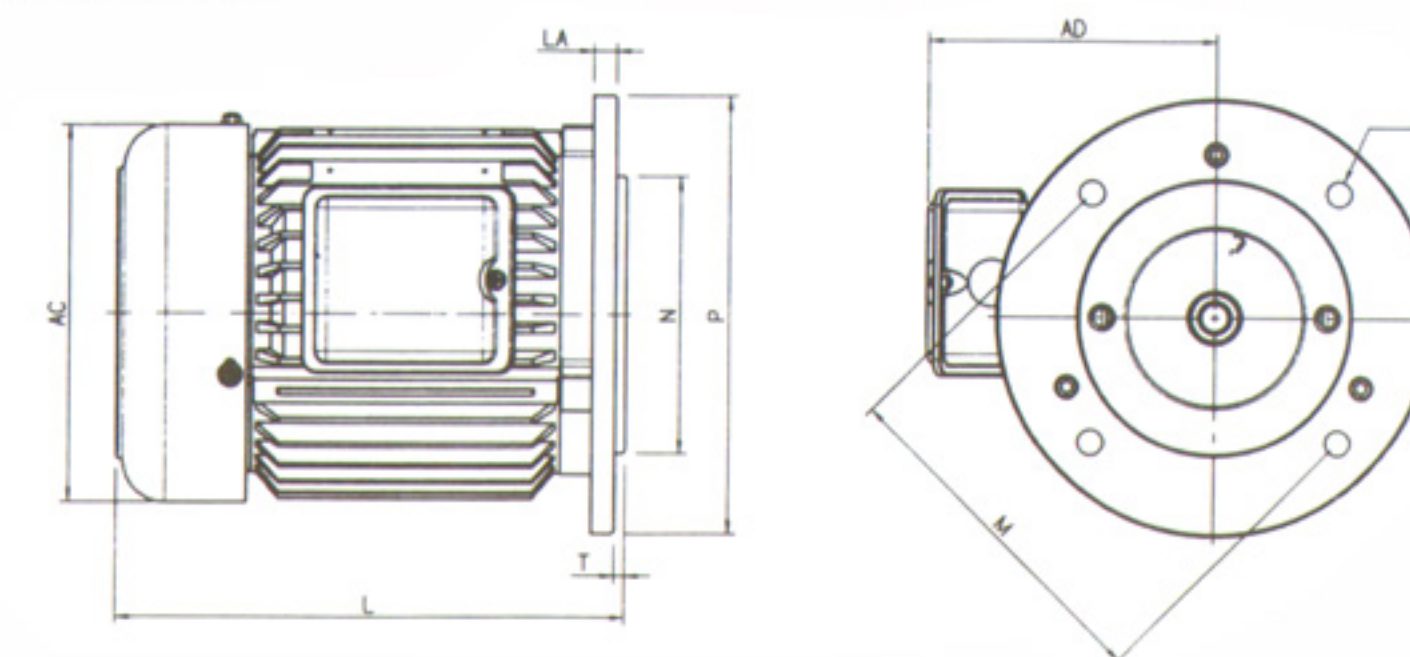

單位: mm

4P	6P	框號	相數	AC	AD	L	LA	M	N	P	S	T	淨重(kg)
1	1/2	80	三	177	139	248	10	180	130	205	12	12	16.5
1	-	90	單	195	154	280	10	200	130	230	12	10	24
2	1	90	三	195	148	258	10	200	130	230	12	10	24
2	-	90	單	196	155	306	10	200	130	230	12	10	30
3	2	112	三	230	166	285	11	215	180	250	14	9	32
7.5	5	132	三	268	195	345	13.5	265	230	300	15	5	61
10	7.5	132	三	268	195	380	13.5	265	230	300	15	5	71


立式油壓專用馬達(加長型) HSL

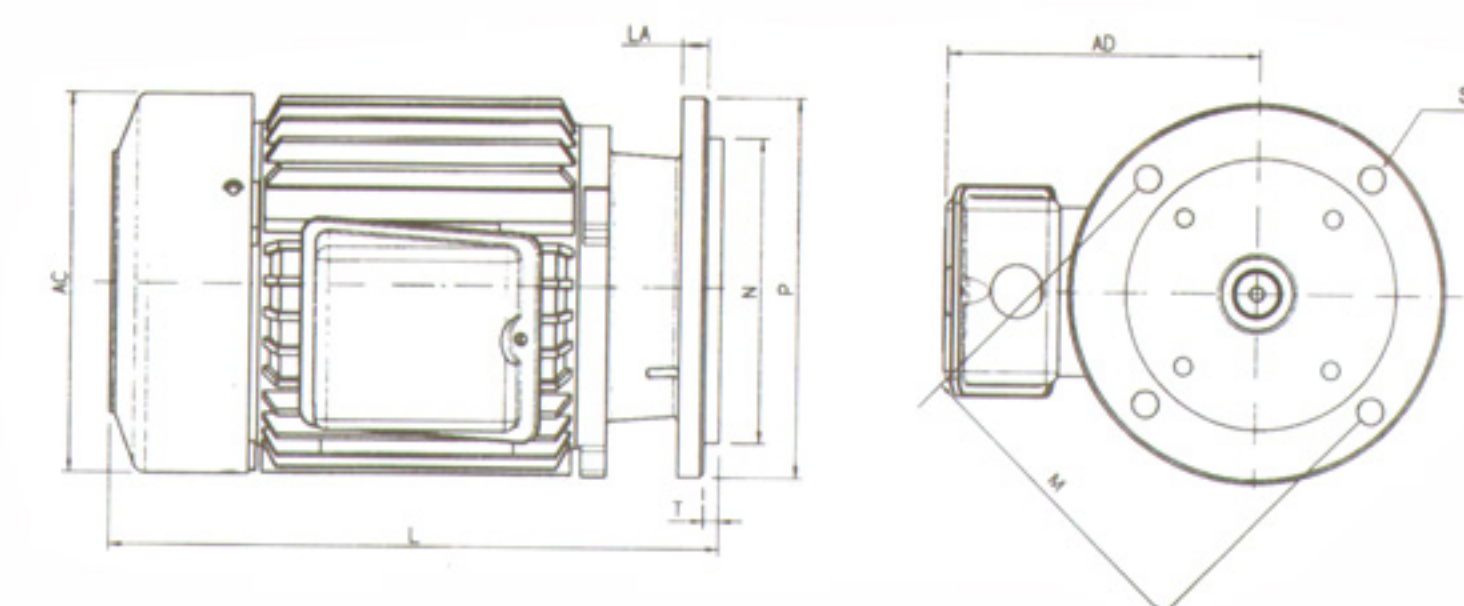

單位: mm

4P	6P	框號	相數	AC	AD	L	LA	M	N	P	S	T	淨重(kg)
1/2	1/4	71	三	157	130	257	11	130	110	160	11	-	12.5
1	1/2	80	三	177	135	282	12	165	130	200	12	13	17
3	-	112	單	230	163	335	12	215	180	250	15	4	42.5
5	3	112	三	230	163	318	10	215	180	250	15	4	40
15	10	160	三	318	250	509	20	300	250	350	19	5	106
20	15	160	三	318	250	553	20	300	250	350	19	5	130

卧式出线盒在上型油壓馬達


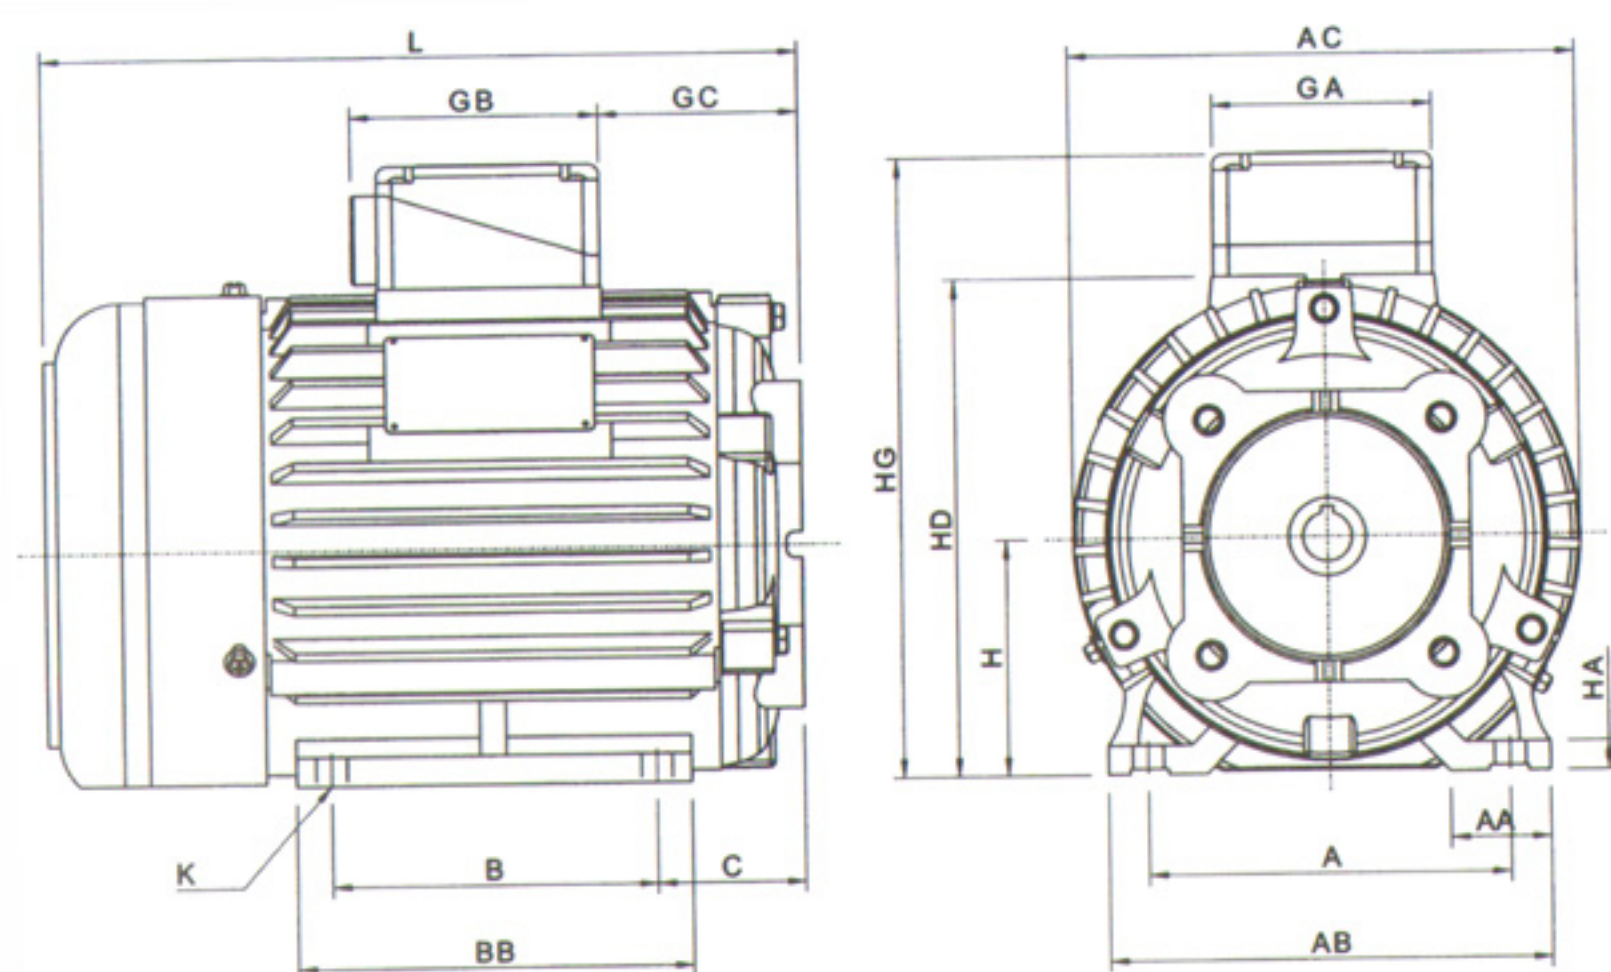


單位: mm


4P	6P	框號	相數	A	AA	AB	AC	B	BB	C	GA	GB	GC	H	HA	HD	HG	K	L	淨重 (Kg)
1		80	三	125	35	155	175	100	130	54	85	95	68	80	10	168	220	10	235	15
2	1	90L	三	140	35	170	190	125	150	57	85	95	77	90	10	188	241	12	278	23
3	2	100L	三	160	45	220	225	140	175	65	85	95	92.5	100	12	210	260	12	308	32

常用電壓馬達配綫圖


三相六條綫

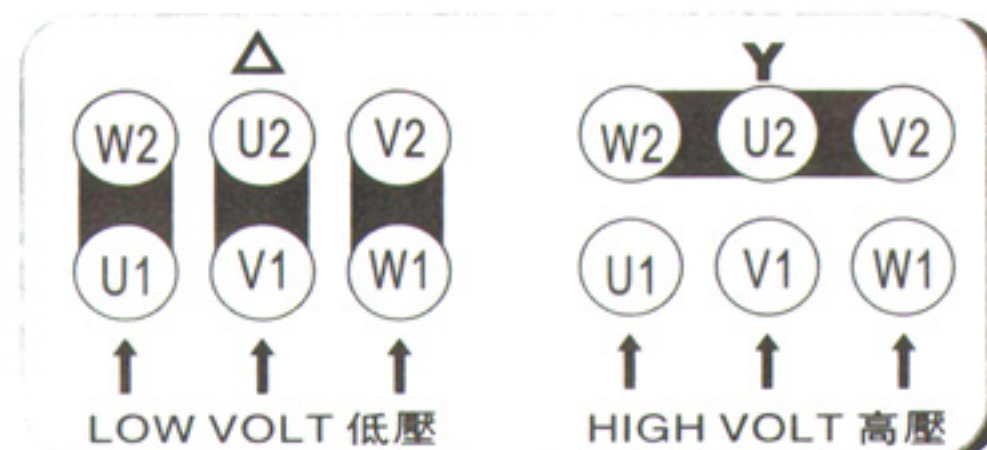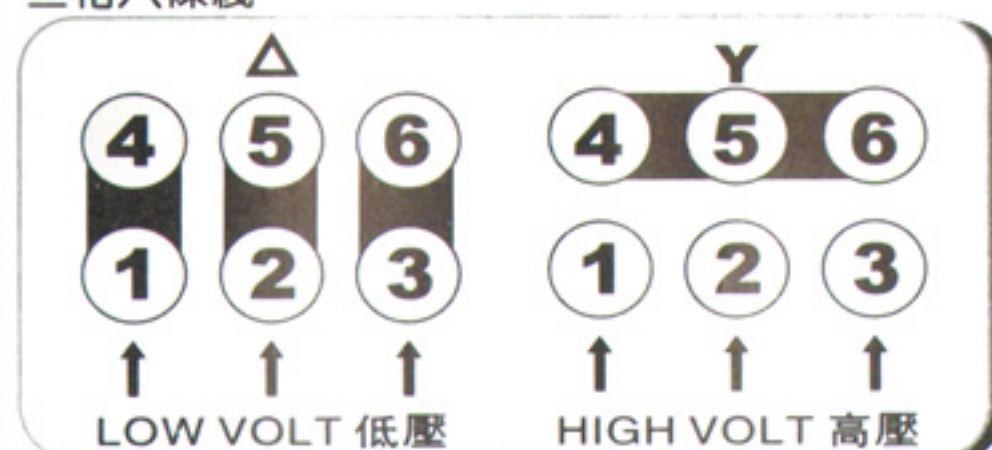


三相九條綫

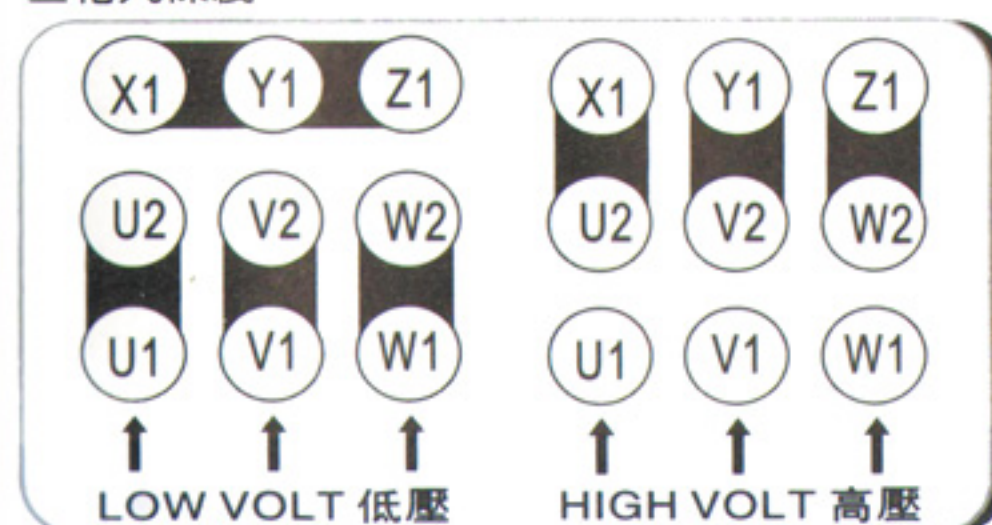

三相2P/4P

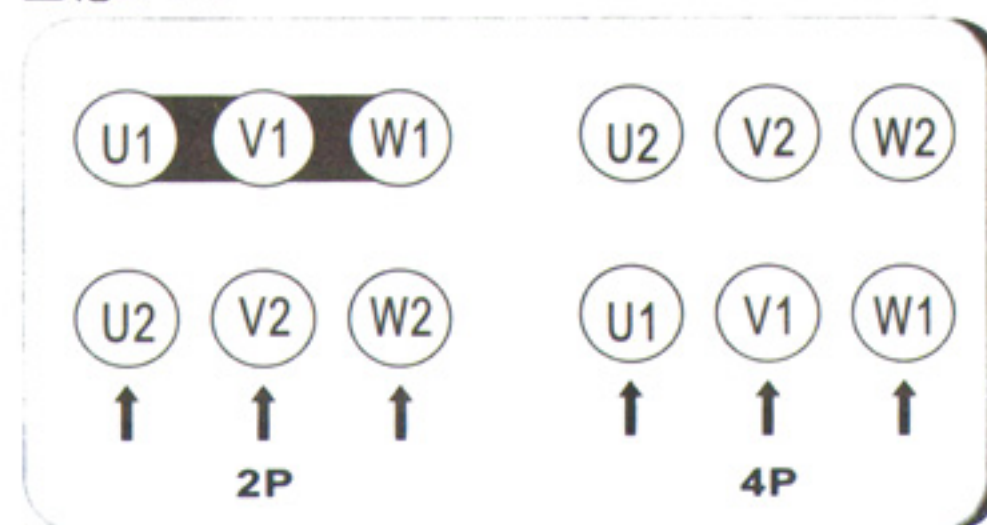

經營理念

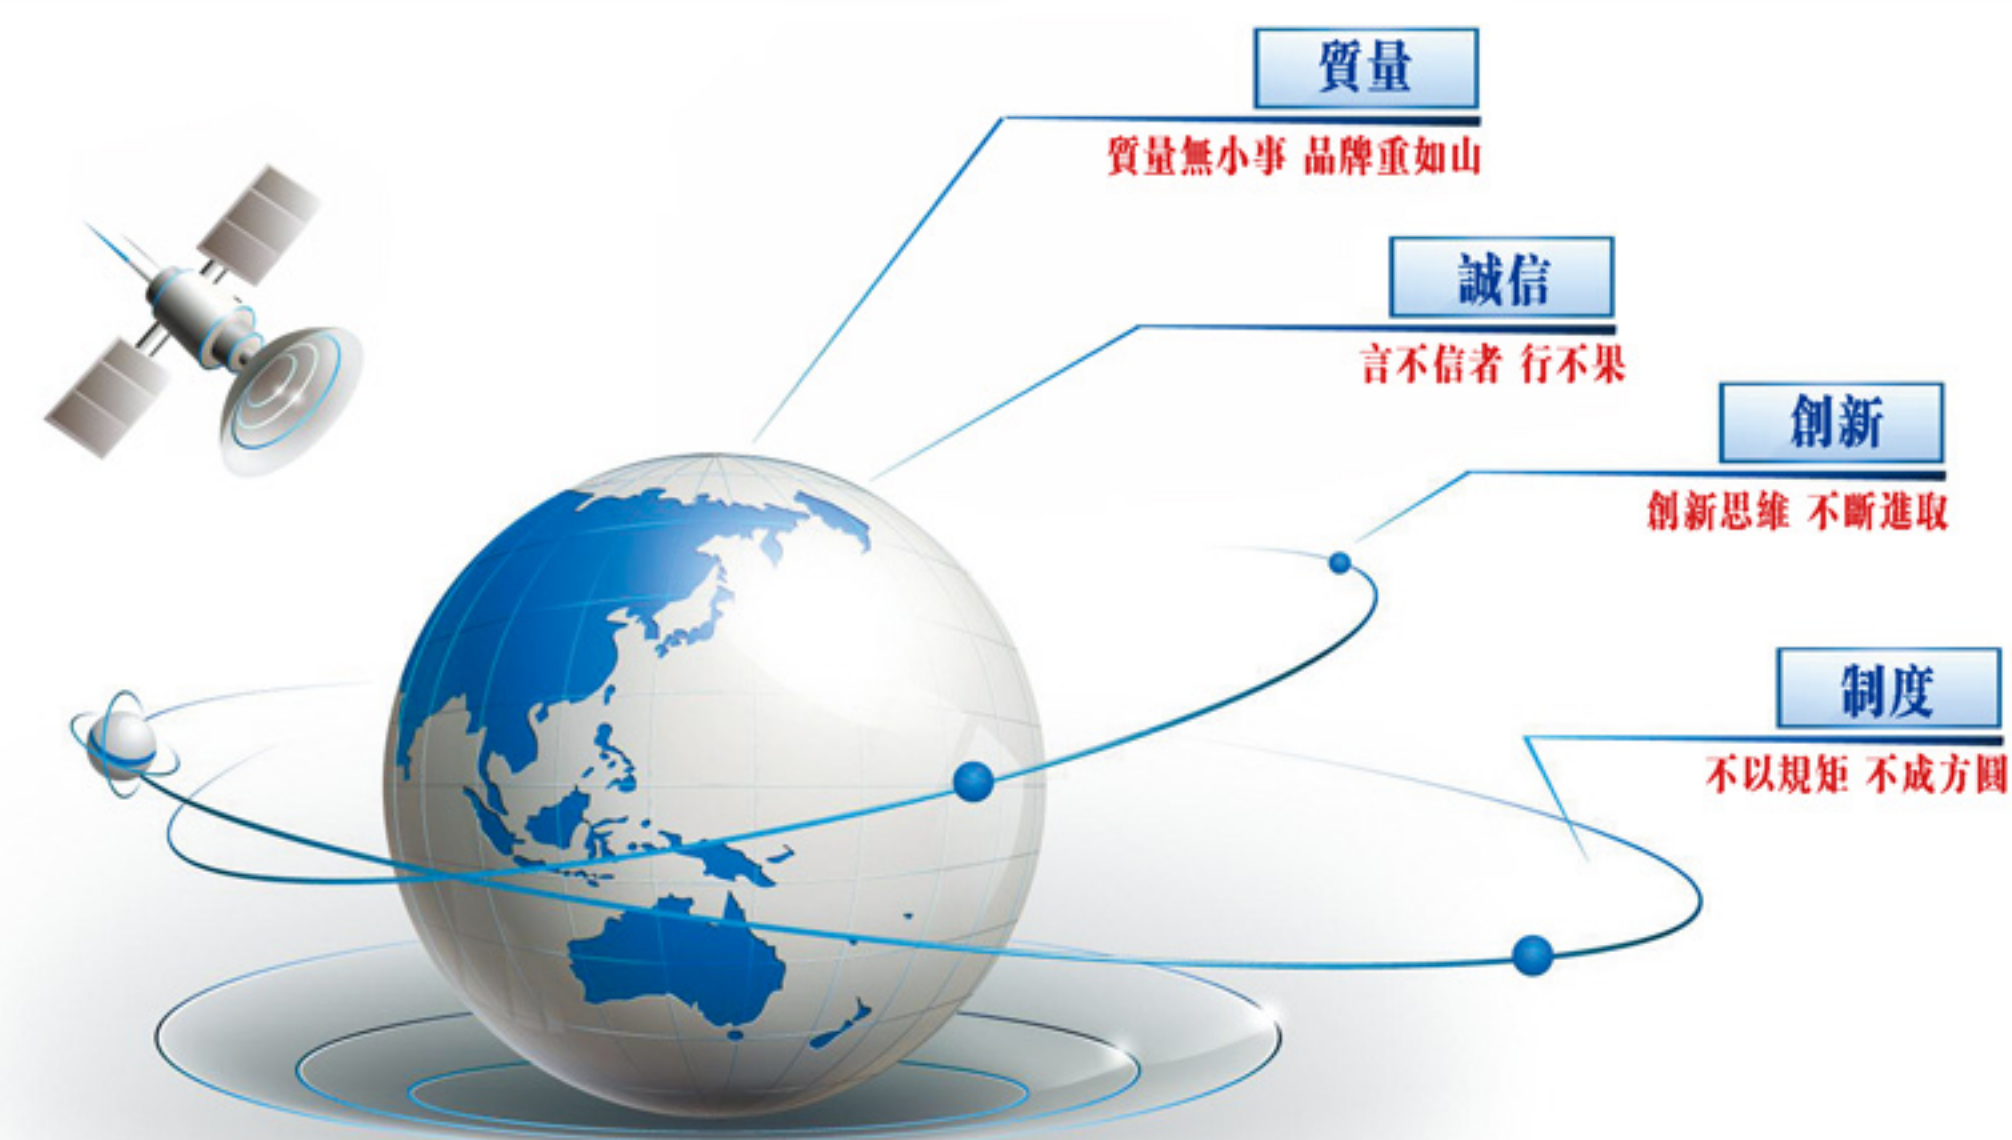

營銷網絡

